IEC 62386-102

Edition 3.0 2022-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Digital addressable lighting interface – Part 102: General requirements – Control gear

Interface d'éclairage adressable numérique – Partie 102: Exigences générales – Appareillages de commande



IEC 62386-102:2022-11(en-fr)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC
La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC
Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform
La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, …). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished
Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org
Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

IEC 62386-102

Edition 3.0 2022-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Digital addressable lighting interface – Part 102: General requirements – Control gear

Interface d'éclairage adressable numérique – Partie 102: Exigences générales – Appareillages de commande

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 29.140.50; 29.140.99

ISBN 978-2-8322-5965-8

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

CONTENTS

FOREWORD 7
INTRODUCTION 9
1 Scope 11
2 Normative references 11
3 Terms and definitions 11
4 General 14
4.1 General 14
4.2 Version number 14
5 Electrical specification 15
6 Bus power supply 15
7 Transmission protocol structure 15
7.1 General 15
7.2 16-bit forward frame encoding 15
7.2.1 General 15
7.2.2 Address byte 15
7.2.3 Opcode byte 15
8 Timing 16
9 Method of operation 16
9.1 General 16
9.2 Control gear 16
9.2.1 General 16
9.2.2 Control gear phases 16
9.3 Dimming curve 17
9.4 Calculating *"targetLevel"* 20
9.5 Fading 20
9.5.1 General 20
9.5.2 Fade time 21
9.5.3 Fade rate 22
9.5.4 Extended fade time 23
9.5.5 Using the fade time 25
9.5.6 Using the fade rate 25
9.5.7 System response to changes during a fade 26
9.5.8 System response to changes during standby and startup 26
9.5.9 Stopping a fade 26
9.6 Min and max level 26
9.7 Commands 27
9.7.1 General 27
9.7.2 Level instructions without fade 27
9.7.3 Level instructions initiating a fade 28
9.7.4 Configuration instructions 28
9.7.5 Queries 28
9.7.6 Special commands 28
9.7.7 Application extended commands 28
9.8 Command iterations 28
9.8.1 General 28

9.8.2 Command iteration of "UP" and "DOWN" commands 28
9.8.3 DAPC SEQUENCE (deprecated) 29
9.9 Modes of operation 30
9.9.1 General 30
9.9.2 Operating mode 0x00: standard mode 30
9.9.3 Operating mode 0x01 to 0x7F: reserved 30
9.9.4 Operating mode 0x80 to 0xFF: manufacturer-specific modes 30
9.10 Memory banks 30
9.10.1 General 30
9.10.2 Memory map 31
9.10.3 Selecting a memory bank location 32
9.10.4 Protectable memory locations 32
9.10.5 Memory bank reading 32
9.10.6 Memory bank writing 34
9.10.7 Memory bank 0 35
9.10.8 Memory bank 1 (optional) 37
9.10.9 Manufacturer-specific memory banks 39
9.10.10 Reserved memory banks 39
9.11 Reset 39
9.11.1 Reset operation 39
9.11.2 Reset memory bank operation 39
9.12 System failure 40
9.13 Power on 40
9.14 Assigning short addresses 41
9.14.1 General 41
9.14.2 Random address allocation 41
9.14.3 Identification of a device 42
9.14.4 Direct address allocation 43
9.15 Failure state behaviour 43
9.16 Status information 43
9.16.1 General 43
9.16.2 Bit 0: Control gear failure 44
9.16.3 Bit 1: lamp failure 44
9.16.4 Bit 2: lamp on 46
9.16.5 Bit 3: limit error 46
9.16.6 Bit 4: fade running 46
9.16.7 Bit 5: reset state 46
9.16.8 Bit 6: missing short address 46
9.16.9 Bit 7: power cycle seen 46
9.17 Non-volatile memory 46
9.18 Device types and features 47
9.19 Using scenes 47
9.20 Current bus unit configuration 48
10 Declaration of variables 49
11 Definition of commands 52
11.1 General 52
11.2 Overview sheets 52
11.3 Level instructions 57
11.3.1 DAPC (*level*) 57

11.3.2 OFF 57
11.3.3 UP 57
11.3.4 DOWN 57
11.3.5 STEP UP 58
11.3.6 STEP DOWN 58
11.3.7 RECALL MAX LEVEL 58
11.3.8 RECALL MIN LEVEL 59
11.3.9 STEP DOWN AND OFF 59
11.3.10 ON AND STEP UP 59
11.3.11 ENABLE DAPC SEQUENCE 60
11.3.12 GO TO LAST ACTIVE LEVEL 60
11.3.13 CONTINUOUS UP 60
11.3.14 CONTINUOUS DOWN 60
11.3.15 GO TO SCENE (*sceneNumber*) 60
11.4 Configuration instructions 60
11.4.1 General 60
11.4.2 RESET 61
11.4.3 STORE ACTUAL LEVEL IN DTR0 61
11.4.4 SET OPERATING MODE (*DTR0*) 61
11.4.5 RESET MEMORY BANK (*DTR0*) 61
11.4.6 IDENTIFY DEVICE 61
11.4.7 SET MAX LEVEL (*DTR0*) 62
11.4.8 SET MIN LEVEL (*DTR0*) 62
11.4.9 SET SYSTEM FAILURE LEVEL (*DTR0*) 62
11.4.10 SET POWER ON LEVEL (*DTR0*) 63
11.4.11 SET FADE TIME (*DTR0*) 63
11.4.12 SET FADE RATE (*DTR0*) 63
11.4.13 SET EXTENDED FADE TIME (*DTR0*) 63
11.4.14 SET SCENE (*DTR0, sceneX*) 64
11.4.15 REMOVE FROM SCENE (*sceneX*) 64
11.4.16 ADD TO GROUP (*group*) 64
11.4.17 REMOVE FROM GROUP (*group*) 64
11.4.18 SET SHORT ADDRESS (*DTR0*) 64
11.4.19 ENABLE WRITE MEMORY 65
11.5 Queries 65
11.5.1 General 65
11.5.2 QUERY STATUS 65
11.5.3 QUERY CONTROL GEAR PRESENT 65
11.5.4 QUERY CONTROL GEAR FAILURE 65
11.5.5 QUERY LAMP FAILURE 65
11.5.6 QUERY LAMP POWER ON 65
11.5.7 QUERY LIMIT ERROR 65
11.5.8 QUERY RESET STATE 65
11.5.9 QUERY MISSING SHORT ADDRESS 65
11.5.10 QUERY VERSION NUMBER 66
11.5.11 QUERY CONTENT DTR0 66
11.5.12 QUERY DEVICE TYPE 66
11.5.13 QUERY NEXT DEVICE TYPE 66
11.5.14 QUERY PHYSICAL MINIMUM 66

11.5.15 QUERY POWER FAILURE 67
11.5.16 QUERY CONTENT DTR1 67
11.5.17 QUERY CONTENT DTR2 67
11.5.18 QUERY OPERATING MODE 67
11.5.19 QUERY LIGHT SOURCE TYPE 67
11.5.20 QUERY ACTUAL LEVEL 68
11.5.21 QUERY MAX LEVEL 68
11.5.22 QUERY MIN LEVEL 68
11.5.23 QUERY POWER ON LEVEL 68
11.5.24 QUERY SYSTEM FAILURE LEVEL 68
11.5.25 QUERY FADE TIME/FADE RATE 68
11.5.26 QUERY EXTENDED FADE TIME 68
11.5.27 QUERY MANUFACTURER SPECIFIC MODE 68
11.5.28 QUERY SCENE LEVEL (*sceneX*) 68
11.5.29 QUERY GROUPS 0-7 69
11.5.30 QUERY GROUPS 8-15 69
11.5.31 QUERY RANDOM ADDRESS (H) 69
11.5.32 QUERY RANDOM ADDRESS (M) 69
11.5.33 QUERY RANDOM ADDRESS (L) 69
11.5.34 READ MEMORY LOCATION (*DTR1, DTR0*) 69
11.6 Application extended commands 69
11.6.1 General 69
11.6.2 QUERY EXTENDED VERSION NUMBER 70
11.7 Special commands 70
11.7.1 General 70
11.7.2 TERMINATE 70
11.7.3 DTR0 (*data*) 70
11.7.4 INITIALISE (*device*) 70
11.7.5 RANDOMISE 71
11.7.6 COMPARE 71
11.7.7 WITHDRAW 71
11.7.8 SEARCHADDRH (*data*) 71
11.7.9 SEARCHADDRM (*data*) 72
11.7.10 SEARCHADDRL (*data*) 72
11.7.11 PROGRAM SHORT ADDRESS (*data*) 72
11.7.12 VERIFY SHORT ADDRESS (*data*) 72
11.7.13 QUERY SHORT ADDRESS 72
11.7.14 ENABLE DEVICE TYPE (*data*) 73
11.7.15 DTR1 (*data*) 73
11.7.16 DTR2 (*data*) 73
11.7.17 WRITE MEMORY LOCATION (*DTR1, DTR0, data*) 73
11.7.18 WRITE MEMORY LOCATION – NO REPLY (*DTR1, DTR0, data*) 74
11.7.19 PING 74
Annex A (informative) Examples of algorithms 75
A.1 Random address allocation 75
A.2 One single control gear connected to the control device 75
A.3 Using application extended commands 76
Annex B (normative) High resolution dimmer 77
Bibliography 79

Figure 1 – IEC 62386 graphical overview 9
Figure 2 – Control gear directly operating a light source 16
Figure 3 – Dimming curve 18
Figure 4 – Level over time, fading up and down 21
Figure 5 – Timing and response when executing command iteration 29
Figure 6 – Correlation between "*lampFailure*", "*lampOn*" and "*fadeRunning*" bits 45
Figure B.1 – Level behaviour in case of off-grid starting points 78

Table 1 – 16-bit command frame encoding 15
Table 2 – Dimming curve tolerance 18
Table 3 – Dimming curve 19
Table 4 – Fade times 22
Table 5 – Fade rates 23
Table 6 – Extended fade time – Base value 24
Table 7 – Extended fade time – Multiplier 24
Table 8 – Memory types 31
Table 9 – Basic memory map of memory banks 31
Table 10 – Memory map of memory bank 0 35
Table 11 – Memory map of memory bank 1 38
Table 12 – Power on timing 41
Table 13 – Control gear status 43
Table 14 – Scenes 48
Table 15 – Current bus unit configuration 49
Table 16 – Declaration of variables 50
Table 17 – Standard commands 52
Table 18 – Special commands 56
Table 19 – Light source type encoding 67
Table 20 – Device addressing with "INITIALISE (*device*)" 70

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 102: General requirements – Control gear

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62386-102 has been prepared by IEC technical committee 34: Lighting. It is an International Standard.

This third edition cancels and replaces the second edition published in 2014 and Amendment 1:2018. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- the scope has been updated;
- references have been updated;
- memory bank reading of multi-byte values has been added;
- memory bank 0 and common memory bank requirements have been updated;
- reserved memory banks have been updated;

- non-volatile memory (NVM) save time has been added, and SAVE PERSISTENT VARIABLES removed;
- version number has been updated;
- bus unit configuration has been added.

The text of this International Standard is based on the following documents:

Draft	Report on voting
34/948/FDIS	34/989/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

This Part 102 of IEC 62386 is intended to be used in conjunction with Part 101, which contains general requirements for the relevant product type (system), and with the appropriate Part 2xx (particular requirements for control gear) containing clauses to supplement or modify the corresponding clauses in Part 101 and Part 102 in order to provide the relevant requirements for each type of product.

A list of all parts in the IEC 62386 series, published under the general title *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The IEC 62386 series specifies a bus system for control by digital signals of electronic lighting equipment. The IEC 62386-1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices. Part 104 and Part 105 can be applied to control gear or control devices. Part 104 gives requirements for wireless and alternative wired system components. Part 105 describes firmware transfer. Part 150 gives requirements for an auxiliary power supply which can be stand-alone, or built into control gear or control devices.

The IEC 62386-2xx series extends the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The IEC 62386-3xx series extends the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This third edition of IEC 62386-102 is intended to be used in conjunction with IEC 62386-101 and with the various parts that make up the IEC 62386-2xx series for control gear, and can be used together with IEC 62386-103 for control devices. The division into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognised.

The setup of the standards is graphically represented in Figure 1 below.

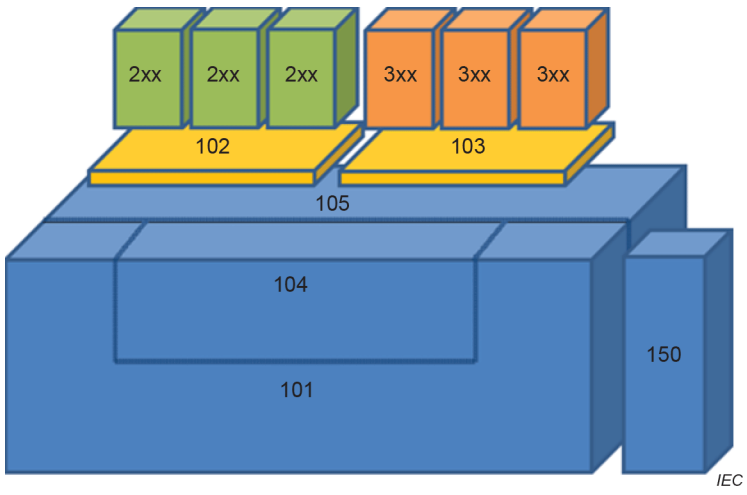


Figure 1 – IEC 62386 graphical overview

When this part of IEC 62386 refers to any of the clauses of the other parts of the IEC 62386-1xx series, the extent to which such a clause is applicable is specified. The other parts also include additional requirements, as necessary.

All numbers used in this document are decimal numbers unless otherwise noted. Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1 and "x" in binary numbers means "don't care".

The following typographic expressions are used:

Variables: *variableName* or *variableName[3:0]*, giving only bits 3 to 0 of *variableName;*

Range of values: [lowest, highest];

Command: "COMMAND NAME".

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 102: General requirements – Control gear

1 Scope

This part of IEC 62386 is applicable to control gear for control by digital signals of electronic lighting equipment.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2022, *Digital addressable lighting interface – Part 101: General requirements – System components*

IEC 62386-103:2022, *Digital addressable lighting interface – Part 103: General requirements – Control devices*

IEC 62386-2xx (all parts), *Digital addressable lighting interface – Part 2xx: Particular requirements for control gear*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62386-101 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1
actual level
value representing the current light output

3.2
arc power
power supplied to the light sources (lamps)

3.3
broadcast
type of address used to simultaneously address all control gear in the system

3.4
broadcast unaddressed
type of address used to simultaneously address all control gear in the system that have no short address

3.5
DAPC
direct arc power control
method to directly control the light output

3.6
DTR
data transfer register
multipurpose register used to exchange data

3.7
group address
type of address used to address a group of control gear in the system all at once

3.8
GTIN
global trade item number
number used for the unique identification of trade items worldwide

Note 1 to entry: For further information see http://en.wikipedia.org/wiki/GTIN.

Note 2 to entry: The global trade item number is comprised of a GS1 or U.P.C. company prefix followed by an item reference number and a check digit. It is described in the "GS1 General Specifications" (see [1]).

3.9
identification
temporary state used during commissioning that allows the installer to identify particular control gear

3.10
level
8-bit value

3.11
MASK
value with all binary digits set to 1

Note 1 to entry: This means that an 8-bit backward frame of MASK is a value of 0xFF, and a multi-byte memory location of 24 bits containing MASK is a value of 0xFFFFFF.

3.12
NO
answer to a query where no backward frame is sent

Note 1 to entry: If a query is asked where the answer is NO, there will be no response, such that the sender of the query will conclude "no backward frame" following IEC 62386-101:2022, 8.2.5.

Note 2 to entry: The answer NO could also be triggered by a missed query.

3.13
NVM
non-volatile memory
non-volatile read/write memory, the content of which can be changed and will not be lost due to a power cycle

3.14
NVM-RO
NVM that cannot be written using any command

3.15
NVM-RW
NVM that can be modified using one or more commands

3.16
opcode
operation code
part of a forward frame that identifies the command to be executed

3.17
operating mode
set of states identified by a number in the range [0,255], characterised by a collection of variables and memory settings, and used to select a set of functionalities to be exhibited by a control gear, including its required reaction to commands

Note 1 to entry: Control gear can support more than one operating mode.

3.18
PHM
physical minimum level
level corresponding to the minimum light output the control gear can operate at

3.19
RAM
volatile read/write memory, the content of which can be changed and will be lost due to a power cycle

3.20
RAM-RO
RAM that cannot be written using any command

3.21
RAM-RW
RAM that can be modified using one or more commands

3.22
random address
random 24-bit number generated by the control gear on request during system initialisation

Note 1 to entry: Clause A.1 provides an example of how the search and random addresses are used.

3.23
reset state
state in which all NVM variables of the control gear have their reset value, except those that are marked "no change" or are otherwise explicitly excluded

3.24
ROM
non-volatile read-only memory, the content of which is fixed

Note 1 to entry: In this document read-only is meant from a system perspective. A ROM variable may actually be implemented in NVM, but this document does not provide any mechanism to change its value.

3.25
scene
configurable preset level

3.26
search address
24-bit number used to identify an individual control gear in the system during initialisation

Note 1 to entry: Clause A.1 provides an example of how the search and random addresses are used.

3.27
short address
type of address used to address an individual control gear in the system

3.28
startup
time needed to change from lamp off to normal operation of the lamp or failure state

Note 1 to entry: This time includes preheat and ignition.

3.29
strictly monotonic
either entirely increasing or decreasing without repeating values

3.30
target level
value representing the target light output expected after completion of the current level command

3.31
TMASK
value with the least significant bit set to 0 and all other binary digits set to 1

Note 1 to entry: This means that an 8-bit backward frame of TMASK is a value of 0xFE, and a multi-byte memory location of 24 bits containing TMASK is a value of 0xFFFFFE.

3.32
YES
answer to a query where a backward frame of MASK is sent

4 General

4.1 General

The requirements of IEC 62386-101:2022, Clause 4 apply, with the restrictions, changes and additions identified below.

4.2 Version number

This subclause replaces IEC 62386-101:2022, 4.2.

The version shall be in the format "x.y", where the major version number x is in the range of 0 to 62 and the minor version number y is in the range of 0 to 2. When the version number is encoded into a byte, the major version number x shall be placed in bits 7 to 2 and the minor version number y shall be placed in bits 1 to 0.

At each amendment to an edition of IEC 62386-102 the minor version number shall be incremented by one.

At a new edition of IEC 62386-102 the major version number shall be incremented by one and the minor version number shall be set to 0.

The current version number is "*versionNumber*" as defined in Table 16.

NOTE IEC documents are generally subject to two amendments before a new edition is prepared.