ASCE STANDARD

ASCE/SEI

41-23

Seismic Evaluation and Retrofit of Existing Buildings

ASCE
AMERICAN SOCIETY OF CIVIL ENGINEERS

SEI
ASCE
STRUCTURAL ENGINEERING INSTITUTE

ASCE STANDARD

ASCE/SEI

41-23

Seismic Evaluation and Retrofit of Existing Buildings

AMERICAN SOCIETY OF CIVIL ENGINEERS

STRUCTURAL ENGINEERING INSTITUTE

PUBLISHED BY THE AMERICAN SOCIETY OF CIVIL ENGINEERS

Library of Congress Cataloging-in-Publication Data

Names: Structural Engineering Institute, author. | American Society of Civil Engineers, issuing body.
Title: Seismic evaluation and retrofit of existing buildings.
Other titles: ASCE/SEI 41-23
Description: Reston, Virginia : American Society of Civil Engineers, [2023] | Series: ASCE standard | "ASCE, American Society of Civil Engineers, SEI, ASCE, Structural Engineering Institute." | Includes bibliographical references and index. | Summary: "ASCE/SEI 41-23 describes deficiency-based and systematic procedures that use performance-based principles to evaluate and retrofit existing buildings to withstand the effects of earthquakes"– Provided by publisher.
Identifiers: LCCN 2023014494 | ISBN 9780784416112 (soft cover) | ISBN 9780784484760 (PDF)
Subjects: LCSH: Buildings–Earthquake effects. | Earthquake resistant design–Standards–United States. | Earthquake hazard analysis.
Classification: LCC TH1095 .S76 2023 | DDC 693.8/52–dc23/eng/20230809
LC record available at https://lccn.loc.gov/2023014494

Published by American Society of Civil Engineers
1801 Alexander Bell Drive
Reston, Virginia, 20191-4382
www.asce.org/bookstore | ascelibrary.org

This standard was developed by a consensus standards development process that has been accredited by the American National Standards Institute (ANSI). Accreditation by ANSI, a voluntary accreditation body representing public and private sector standards development organizations in the United States and abroad, signifies that the standards development process used by ASCE has met the ANSI requirements for openness, balance, consensus, and due process.

While ASCE's process is designed to promote standards that reflect a fair and reasoned consensus among all interested participants, while preserving the public health, safety, and welfare that is paramount to its mission, it has not made an independent assessment of and does not warrant the accuracy, completeness, suitability, or utility of any information, apparatus, product, or process discussed herein. ASCE does not intend, nor should anyone interpret, ASCE's standards to replace the sound judgment of a competent professional, having knowledge and experience in the appropriate field(s) of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the contents of this standard.

ASCE has no authority to enforce compliance with its standards and does not undertake to certify products for compliance or to render any professional services to any person or entity.

ASCE disclaims any and all liability for any personal injury, property damage, financial loss, or other damages of any nature whatsoever, including without limitation any direct, indirect, special, exemplary, or consequential damages, resulting from any person's use of, or reliance on, this standard. Any individual who relies on this standard assumes full responsibility for such use.

ASCE and American Society of Civil Engineers—Registered in US Patent and Trademark Office.

Photocopies and permissions. Permission to photocopy or reproduce material from ASCE publications can be requested by sending an e-mail to permissions@asce.org or by locating a title in ASCE's Civil Engineering Database (https://cedb.asce.org) or ASCE Library (https://ascelibrary.org) and using the "Permissions" link.

Errata: **Errata, if any, can be found at https://doi.org/10.1061/9780784416112.**

Copyright © 2023 by the American Society of Civil Engineers.
All Rights Reserved.
ISBN 978-0-7844-1611-2 (soft cover)
ISBN 978-0-7844-8476-0 (PDF)

Manufactured in the United States of America.

27 26 25 24 23 1 2 3 4 5

ASCE STANDARDS

In 2016, the Board of Direction approved revisions to the ASCE Rules for Standards Committees to govern the writing and maintenance of standards developed by ASCE. All such standards are developed by a consensus standards process managed by the ASCE Codes and Standards Committee. The consensus process includes balloting by a balanced standards committee and reviewing during a public comment period. All standards are revised or reaffirmed every five years, unless approved for an extension. Requests for formal interpretations shall be processed in accordance with Section 7 of ASCE Rules for Standards Committees, which are available at www.asce.org. Errata, addenda, supplements, and interpretations, if any, for this standard can also be found at www.asce.org.

The provisions of this document are written in permissive language and, as such, offer the user a series of options or instructions but do not prescribe a specific course of action. Significant judgment is left to the user of this document.


This standard has been prepared in accordance with recognized engineering principles and should not be used without the user's competent knowledge for a given application. The publication of this standard by ASCE is not intended to warrant that the information contained therein is suitable for any general or specific use, and ASCE takes no position respecting the validity of patent rights. The user is advised that the determination of patent rights or risk of infringement is entirely their own responsibility.

A complete list of currently available standards is available in the ASCE Library (https://ascelibrary.org/page/books/s-standards).

Tips for Using This Standard

The **standard provisions** are contained in Chapters 1 to 18. Standard provisions are mandatory.

The **standard commentary** is contained in Chapters C1 to C18. Standard commentary is intended to help the reader understand how provisions were determined and how to apply them.

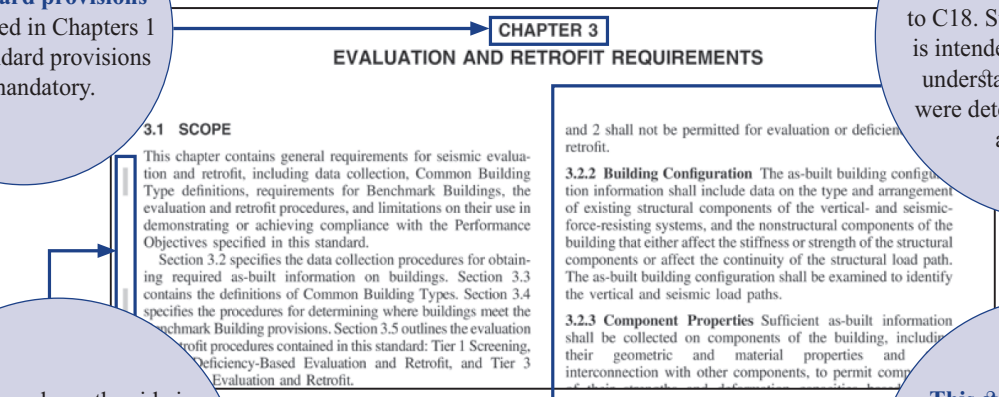

CHAPTER 3

EVALUATION AND RETROFIT REQUIREMENTS

3.1 SCOPE

This chapter contains general requirements for seismic evaluation and retrofit, including data collection, Common Building Type definitions, requirements for Benchmark Buildings, the evaluation and retrofit procedures, and limitations on their use in demonstrating or achieving compliance with the Performance Objectives specified in this standard.

Section 3.2 specifies the data collection procedures for obtaining required as-built information on buildings. Section 3.3 contains the definitions of Common Building Types. Section 3.4 specifies the procedures for determining where buildings meet the benchmark Building provisions. Section 3.5 outlines the evaluation and retrofit procedures contained in this standard: Tier 1 Screening, Deficiency-Based Evaluation and Retrofit, and Tier 3 Evaluation and Retrofit.


and 2 shall not be permitted for evaluation or deficien… retrofit.

3.2.2 Building Configuration The as-built building configu… tion information shall include data on the type and arrangement of existing structural components of the vertical- and seismic-force-resisting systems, and the nonstructural components of the building that either affect the stiffness or strength of the structural components or affect the continuity of the structural load path. The as-built building configuration shall be examined to identify the vertical and seismic load paths.

3.2.3 Component Properties Sufficient as-built information shall be collected on components of the building, includi… their geometric and material properties and interconnection with other components, to permit comp…

Gray bars down the side in the provisions (but not the commentary) indicate sections with substantive changes (additions or deletions) from the previous edition of the standard, ASCE/SEI 41-17.

This standard uses both customary and metric (SI) units. A customary unit is presented like this: 3,000 ft^2. An SI unit is presented in parentheses like this: (280 m^2).

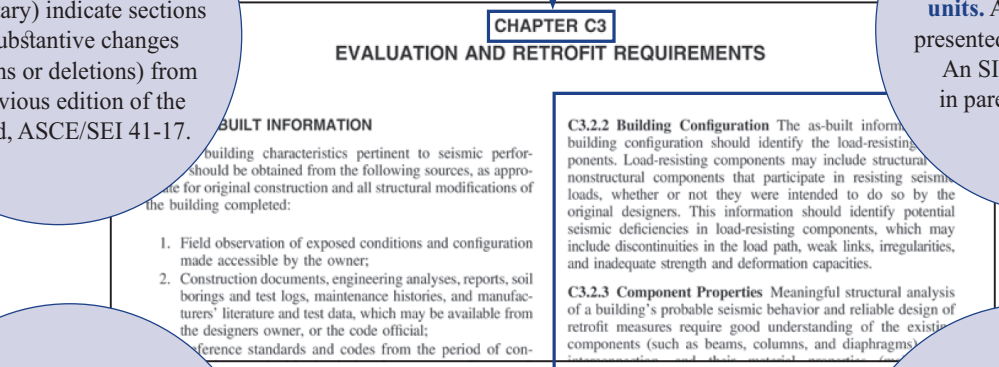

CHAPTER C3

EVALUATION AND RETROFIT REQUIREMENTS

…BUILT INFORMATION

…building characteristics pertinent to seismic perfor… should be obtained from the following sources, as appro… for original construction and all structural modifications of the building completed:

1. Field observation of exposed conditions and configuration made accessible by the owner;
2. Construction documents, engineering analyses, reports, soil borings and test logs, maintenance histories, and manufacturers' literature and test data, which may be available from the designers owner, or the code official;
…ference standards and codes from the period of con-

C3.2.2 Building Configuration The as-built inform… building configuration should identify the load-resisting… ponents. Load-resisting components may include structural… nonstructural components that participate in resisting seismic… loads, whether or not they were intended to do so by the original designers. This information should identify potential seismic deficiencies in load-resisting components, which may include discontinuities in the load path, weak links, irregularities, and inadequate strength and deformation capacities.


C3.2.3 Component Properties Meaningful structural analysis of a building's probable seismic behavior and reliable design of retrofit measures require good understanding of the existi… components (such as beams, columns, and diaphragms)…

These buildings are single- or multiple-family dwellings one or more stories high with plan areas less than or equal to 3,000 ft^2 (280 m^2).

Building loads are light, and the framing spans are short. Floor and roof framing consists of wood joists or rafters on wood studs spaced no more than 24 in. (61cm) apart.

Reference Documents are listed in Chapter 18, where they are listed by number with title, publisher, and year of publication. In text, they are mentioned only by number: AAMA 501.6, ACI 214.4R, ACI 228.2R.

References are listed in Chapter C18 in the commentary, where they are presented by author and date with bibliographic information. In the text, these references are cited by author and date: AAMA (2015), AASHTO (1999), AASHTO (2010)

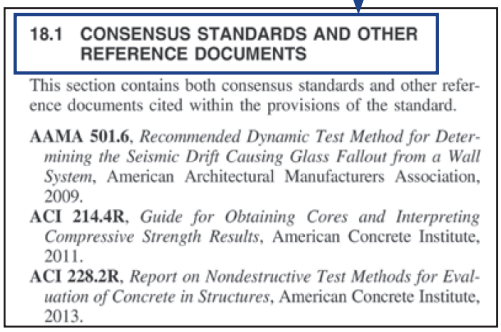


18.1 CONSENSUS STANDARDS AND OTHER REFERENCE DOCUMENTS

This section contains both consensus standards and other reference documents cited within the provisions of the standard.

AAMA 501.6, *Recommended Dynamic Test Method for Determining the Seismic Drift Causing Glass Fallout from a Wall System*, American Architectural Manufacturers Association, 2009.

ACI 214.4R, *Guide for Obtaining Cores and Interpreting Compressive Strength Results*, American Concrete Institute, 2011.

ACI 228.2R, *Report on Nondestructive Test Methods for Evaluation of Concrete in Structures*, American Concrete Institute, 2013.

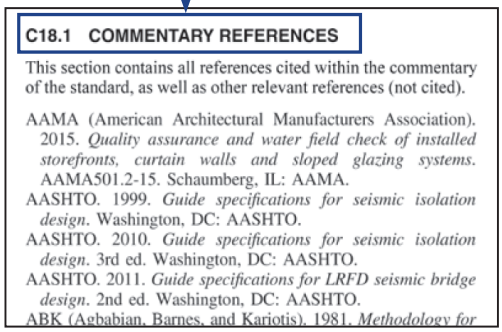

C18.1 COMMENTARY REFERENCES

This section contains all references cited within the commentary of the standard, as well as other relevant references (not cited).

AAMA (American Architectural Manufacturers Association). 2015. *Quality assurance and water field check of installed storefronts, curtain walls and sloped glazing systems*. AAMA501.2-15. Schaumberg, IL: AAMA.

AASHTO. 1999. *Guide specifications for seismic isolation design*. Washington, DC: AASHTO.

AASHTO. 2010. *Guide specifications for seismic isolation design*. 3rd ed. Washington, DC: AASHTO.

AASHTO. 2011. *Guide specifications for LRFD seismic bridge design*. 2nd ed. Washington, DC: AASHTO.

ABK (Agbabian, Barnes, and Kariotis). 1981. *Methodology for*

Supplements, errata, and interpretations may become available in the future. Please check for important new materials at https://doi.org.10/16/9780784416112.

Tips for Using the ASCE Hazard Tool

asce7hazardtool.online

The ASCE Hazard Tool provides access to the digital data defined in the hazard Geodatabases required by ASCE standards. The digital data required for flood, ice, rain, seismic, snow, tornado, and wind are available at https://asce7hazardtool.online/. Digital data required for tsunami is available at https://asce7tsunami.online/.



Digital Data: The ASCE Hazard Tool provides digital data required by ASCE Standards:

- **NEW!** Seismic hazard data from ASCE/SEI 41-23 and 41-17, including coefficients and response spectra grouped by different hazard level responses (BSE-2N, BSE-1N, etc…)
- Flood: Flood zone and static base flood elevation, plus direct links to additional information
- Tsunami: Whether the site is in a mapped tsunami design zone per the ASCE Tsunami Design Geodatabase, and link to ASCE Tsunami Design Geodatabase if required for design
- Snow: Ground snow load and winter wind parameter
- Rain: Median 15-minute and 60-minute duration rainfall intensities for 100-year mean recurrence interval
- Ice: Radial ice thickness with concurrent 3-second gust speeds and temperature concurrent with ice thickness due to freezing rain
- Seismic: Seismic coefficients S_S, S_1, S_{MS}, S_{M1}, S_{DS}, S_{D1}, T_L, PGA_M, and V_{S30}, plus the seismic design category, as well as the multi-period spectrum, the multi-period MCE_R spectrum, the two-period design spectrum, and the two-period MCE_R spectrum
- Wind: Three-second gust wind speeds at 33 feet (10 meters) above ground for Exposure Category C, including identification of hurricane-prone and wind-borne debris regions
- Tornado: Tornado wind speeds for 1,700-, 3,000-, 10,000-, 100,000-, 1,000,000-, and 10,000,000-year MRI, and for 1-, 2,000-, 10,000-, 40,000-, 100,000-, 250,000-, 1,000,000-, and 4,000,000-ft_2. target areas



Introducing ASCE Amplify:
A faster, easier way to work with ASCE Standards

This new digital, interactive, secure platform launches with ASCE/SEI 7-22, 7-16, 7-10, and ASCE/SEI 41-23 and Tier 1 Checklists (*coming soon: ASCE/SEI 41-17*). The complete Provisions and Commentary of ASCE 7 and ASCE 41 are available within a suite of interactive tools and feature-rich functionality. **Additional standards and materials will be added on a rolling basis.**

Amplify offers enhancements that are exclusive to the platform version of these standards, including

- One-click syncing between Provisions and Commentary;
- Redlining feature to quickly spot changes between editions;
- Two-level search functionality
  - Site-wide search returns results across standards at the chapter and section levels;
  - Product level search returns specific results within the standard you are searching;
- Critical real-time incorporation of supplements and errata with date stamps;
- Fully integrated third-party tool to manage personal notes, annotations, and bookmarking;
- Both customary and SI unit measurements included. Customize your display in the user account settings;
- Individual and corporate subscriptions available.

Includes:

Minimum Design Loads and Associated Criteria for Buildings and Other Structures

7-22, 7-16, 7-10

•

Seismic Evaluation and Retrofit of Existing Buildings

41-23 and Tier 1 Checklists

For information or demo, contact:

amplifytools@asce.org

American Society of Civil Engineers • 1801 Alexander Bell Drive • Reston, VA 20191 • Ph: 1-800-548-2723 or 703-295-6300 • amplify.asce.org

CONTENTS

ASCE STANDARDS . . . iii

TIPS FOR USING THIS STANDARD . . . iv

TIPS FOR USING THE ASCE HAZARD TOOL . . . v

PREFACE . . . xxxvii

ACKNOWLEDGMENTS . . . xl

DEDICATION . . . xliv

UNIT CONVERSIONS . . . xlv

1 GENERAL REQUIREMENTS . . . 1
- 1.1 Scope . . . 1
- 1.2 Definitions and Notation . . . 1
  - 1.2.1 Definitions . . . 1
  - 1.2.2 Notation . . . 7
    - 1.2.2.1 Uppercase Notation . . . 7
    - 1.2.2.2 Lowercase Notation . . . 14
    - 1.2.2.3 Greek Notation . . . 16
- 1.3 Seismic Evaluation Process . . . 18
  - 1.3.1 Assignment of Performance Objective . . . 18
  - 1.3.2 Level of Seismicity . . . 19
  - 1.3.3 As-Built Information . . . 19
  - 1.3.4 Evaluation Procedures . . . 19
- 1.4 Seismic Retrofit Process . . . 19
  - 1.4.1 Assignment of Performance Objective . . . 19
  - 1.4.2 Level of Seismicity . . . 19
  - 1.4.3 As-Built Information . . . 19
  - 1.4.4 Verification of Retrofit Design . . . 19
  - 1.4.5 Quality Assurance and Structural Observation . . . 19
    - 1.4.5.1 Special Inspections and Testing . . . 19
    - 1.4.5.2 Structural Observation . . . 19

2 PERFORMANCE OBJECTIVES AND SEISMIC HAZARDS . . . 21
- 2.1 Scope . . . 21
- 2.2 Performance Levels . . . 21
  - 2.2.1 Structural Performance Levels and Ranges . . . 21
  - 2.2.2 Nonstructural Performance Levels . . . 21
- 2.3 Seismic Hazard . . . 21
  - 2.3.1 Seismic Hazard Levels . . . 21
    - 2.3.1.1 BSE-2N Seismic Hazard Level . . . 22
    - 2.3.1.2 BSE-1N Seismic Hazard Level . . . 22
    - 2.3.1.3 BSE-2E Seismic Hazard Level . . . 22
    - 2.3.1.4 BSE-1E Seismic Hazard Level . . . 22
    - 2.3.1.5 Seismic Hazard Levels for Other Probabilities of Exceedance, Risk Targets, or Deterministic Hazards . . . 22
  - 2.3.2 General Response Spectrum . . . 22
    - 2.3.2.1 Multi-Period General Horizontal Response Spectrum . . . 22

2.3.2.2 Two-Period General Horizontal Response Spectrum . . . 23
2.3.2.3 General Vertical Response Spectrum . . . 23
2.3.3 Site-Specific Procedure for Hazards Caused by Ground Shaking . . . 23
2.3.4 Ground Motion Acceleration Histories . . . 23
2.4 Performance Objectives . . . 23
2.4.1 Basic Performance Objective for Existing Buildings (BPOE) . . . 23
2.4.2 Enhanced Performance Objectives . . . 23
2.4.3 Limited Performance Objectives . . . 24
2.4.4 Basic Performance Objective Equivalent to New Building Standards (BPON) . . . 24
2.4.5 Partial Retrofit . . . 24
2.4.6 System-Specific Performance Procedures . . . 25
2.5 Level of Seismicity . . . 25

3 EVALUATION AND RETROFIT REQUIREMENTS . . . 27
3.1 Scope . . . 27
3.2 As-Built Information . . . 27
3.2.1 Building Type . . . 27
3.2.2 Building Configuration . . . 27
3.2.3 Component Properties . . . 27
3.2.4 Site and Foundation Information . . . 27
3.2.5 Adjacent Buildings . . . 27
3.2.5.1 Building Pounding . . . 27
3.2.5.2 Shared Element Condition . . . 28
3.2.5.3 Hazards from Adjacent Buildings . . . 28
3.3 Common Building Types . . . 28
3.4 Benchmark Buildings . . . 30
3.4.1 Benchmark Procedure Checklist . . . 32
3.4.2 Parameters for Benchmark Procedure . . . 32
3.4.2.1 Level of Seismicity . . . 32
3.4.2.2 Seismic Force Provisions . . . 32
3.5 Evaluation and Retrofit Procedures . . . 33
3.5.1 Limitations on the Use of Tier 1 and Tier 2 Evaluation and Retrofit Procedures . . . 33
3.5.1.1 Buildings Conforming to One of the Common Building Types . . . 34
3.5.1.2 Buildings Composed of More than One of the Common Building Types . . . 34
3.5.2 Tier 1 Screening Procedure . . . 36
3.5.3 Tier 2 Deficiency-Based Evaluation and Retrofit Procedures . . . 36
3.5.3.1 Evaluation Requirements . . . 37
3.5.3.2 Retrofit Requirements . . . 37
3.5.4 Tier 3 Systematic Evaluation and Retrofit Procedures . . . 37
3.5.4.1 Evaluation Requirements . . . 37
3.5.4.2 Retrofit Requirements . . . 37

4 TIER 1 SCREENING . . . 39
4.1 Scope . . . 39
4.1.1 Performance Level . . . 40
4.1.2 Seismic Hazard Level . . . 40
4.1.3 Level of Seismicity . . . 40
4.2 Scope of Investigation Required . . . 40
4.2.1 On-Site Investigation and Condition Assessment . . . 40
4.2.2 Building Type . . . 41
4.2.3 Default Material Values . . . 41
4.3 Selection and Use of Checklists . . . 41
4.4 Tier 1 Analysis . . . 42
4.4.1 Overview . . . 42
4.4.2 Seismic Forces . . . 42
4.4.2.1 Pseudo Seismic Force . . . 42
4.4.2.2 Story Shear Forces . . . 43
4.4.2.3 Spectral Acceleration . . . 43
4.4.2.4 Period . . . 44
4.4.3 Quick Checks for Strength and Stiffness . . . 44
4.4.3.1 Story Drift for Moment Frames . . . 44
4.4.3.2 Shear Stress in Concrete Frame Columns . . . 44
4.4.3.3 Shear Stress in Shear Walls . . . 44

4.4.3.4 Diagonal Bracing. . . . 44
4.4.3.5 Precast Connections . . . 45
4.4.3.6 Column Axial Stress Caused by Overturning. . . . 45
4.4.3.7 Flexible Diaphragm Connection Forces . . . 45
4.4.3.8 Prestressed Elements . . . 45
4.4.3.9 Flexural Stress in Columns and Beams of Steel Moment Frames. . . . 45

5 TIER 2 DEFICIENCY-BASED EVALUATION AND RETROFIT . . . 47
5.1 Scope . . . 47
5.2 General Requirements . . . 47
5.2.1 Performance Level and Seismic Hazard Level . . . 47
5.2.2 As-Built Information . . . 47
5.2.3 Condition Assessment . . . 47
5.2.4 Tier 2 Analysis Methods. . . . 47
5.2.5 Tier 2 Acceptance Criteria. . . . 50
5.2.6 Knowledge Factor . . . 50
5.3 Tier 2 Deficiency-Based Evaluation Requirements . . . 50
5.4 Procedures for Basic Configuration of Building Systems. . . . 50
5.4.1 General . . . 50
5.4.1.1 Load Path. . . . 50
5.4.1.2 Adjacent Buildings. . . . 50
5.4.1.3 Mezzanines . . . 50
5.4.2 Building Configuration. . . . 50
5.4.2.1 Weak Story Irregularity . . . 50
5.4.2.2 Soft Story Irregularity . . . 50
5.4.2.3 Vertical Irregularities. . . . 50
5.4.2.4 Geometric Irregularity . . . 50
5.4.2.5 Mass Irregularity . . . 50
5.4.2.6 Torsion Irregularity. . . . 50
5.4.3 Geologic Site Hazards and Foundation Components . . . 50
5.4.3.1 Geologic Site Hazards . . . 50
5.4.3.2 Foundation Performance . . . 51
5.4.3.3 Overturning. . . . 51
5.4.3.4 Ties between Foundation Elements . . . 51
5.5 Procedures for Seismic-Force-Resisting Systems . . . 51
5.5.1 General . . . 51
5.5.1.1 Redundancy . . . 51
5.5.2 Procedures for Moment Frames . . . 51
5.5.2.1 General Procedures for Moment Frames . . . 51
5.5.2.2 Procedures for Steel Moment Frames . . . 51
5.5.2.3 Procedures for Concrete Moment Frames . . . 51
5.5.2.4 Procedures for Precast Concrete Moment Frames. . . . 52
5.5.2.5 Procedures for Frames Not Part of the Seismic-Force-Resisting System. . . . 52
5.5.3 Procedures for Shear Walls . . . 52
5.5.3.1 General Procedures for Shear Walls. . . . 52
5.5.3.2 Procedures for Concrete Shear Walls . . . 52
5.5.3.3 Procedures for Precast Concrete Shear Walls . . . 52
5.5.3.4 Procedures for Unreinforced Masonry Shear Walls. . . . 53
5.5.3.5 Procedures for Infill Walls in Frames . . . 53
5.5.3.6 Procedures for Walls in Wood Frame Buildings . . . 53
5.5.3.7 Procedures for Cold-Formed Steel Light-Frame Construction, Shear Wall Systems 53
5.5.4 Procedures for Braced Frames. . . . 53
5.5.4.1 Axial Stress Check. . . . 53
5.5.4.2 Column Splices. . . . 53
5.5.4.3 Slenderness of Diagonals . . . 53
5.5.4.4 Connection Strength . . . 53
5.5.4.5 Out-of-Plane Restraint for Braced Frames. . . . 54
5.5.4.6 K-Bracing and Chevron-Bracing Configurations . . . 54
5.5.4.7 Tension-Only Braces. . . . 54
5.5.4.8 Concentrically Braced Frame Joints . . . 54
5.5.4.9 Procedures for Cold-Formed Steel Light-Frame Construction, Strap-Braced Wall Systems. . . . 54
5.6 Procedures for Diaphragms . . . 54
5.6.1 General Procedures for Diaphragms. . . . 54

5.6.1.1 Diaphragm and Roof Chord Continuity . . . 54
5.6.1.2 Diaphragm Cross Ties . . . 54
5.6.1.3 Openings in Diaphragms at Shear Walls, Braced Frames, and Moment Frames 54
5.6.1.4 Plan Irregularities in Diaphragms . . . 54
5.6.1.5 Diaphragm Reinforcement at Openings . . . 54
5.6.2 Procedures for Wood Diaphragms . . . 54
5.6.3 Procedures for Steel Deck Diaphragms . . . 54
5.6.4 Procedures for Precast Concrete Diaphragms . . . 55
5.6.5 Diaphragms Other Than Wood, Steel Deck, Concrete, or Horizontal Bracing . . . 55
5.7 Procedures for Connections . . . 55
5.7.1 Anchorage for Normal Forces . . . 55
5.7.1.1 Wall Anchorage . . . 55
5.7.1.2 Stiffness of Wall Anchors . . . 55
5.7.1.3 Wood Ledgers with Cross-Grain Bending . . . 55
5.7.1.4 Precast Concrete Panel Connections . . . 55
5.7.2 Connections for Shear Transfer . . . 55
5.7.3 Connections for Vertical Elements . . . 55
5.7.3.1 Steel and Concrete Columns . . . 55
5.7.3.2 Shear Wall Boundary Columns . . . 55
5.7.3.3 Wood or Cold-Formed Steel Posts and Wood Sills and Cold-Formed Steel Base Tracks . . . 55
5.7.3.4 Concrete Walls, Precast Wall Panels, and Other Wall Panels . . . 55
5.7.3.5 Uplift at Pile Caps . . . 55
5.7.4 Interconnection of Elements . . . 55
5.7.4.1 Girder–Column Connection . . . 55
5.7.4.2 Girders Supported by Walls or Pilasters . . . 55
5.7.4.3 Corbel Bearing and Connections . . . 55
5.7.4.4 Beam, Girder, and Truss Supported on Unreinforced Masonry (URM) Walls or URM Pilasters . . . 55
5.7.5 Roof and Wall Panel Connections . . . 55
5.8 Tier 2 Deficiency-Based Retrofit Requirements . . . 55
5.8.1 Compliance with Deficiency-Based Evaluation . . . 55
5.8.2 Additional Evaluation of the Resulting Building . . . 56
5.8.2.1 Building Configuration . . . 56
5.8.2.2 Increased Gravity Demands to Existing Elements . . . 56
5.8.2.3 Increased Seismic Demands to Existing Elements . . . 56
5.8.3 Evaluation of New and Modified Structural Elements and Connections . . . 56
5.8.4 Retrofit-Specific Requirements . . . 56
5.8.4.1 General . . . 56
5.8.4.2 Design and Detailing Requirements . . . 56
5.8.4.3 Scope of Evaluation Requirements for Existing Components . . . 56

6 TIER 3 SYSTEMATIC EVALUATION AND RETROFIT . . . 57
6.1 Scope . . . 57
6.2 Data Collection Requirements . . . 57
6.2.1 Construction Documentation . . . 57
6.2.2 Condition Assessment . . . 57
6.2.3 Material Properties . . . 57
6.2.3.1 Knowledge Factor for Linear Procedures . . . 58
6.2.3.2 Property Bounding for Nonlinear Procedures . . . 58
6.3 Tier 3 Evaluation Requirements . . . 59
6.4 Tier 3 Retrofit Requirements . . . 59

7 ANALYSIS PROCEDURES AND ACCEPTANCE CRITERIA . . . 61
7.1 Scope . . . 61
7.2 General Analysis Requirements . . . 61
7.2.1 Analysis Procedures . . . 61
7.2.2 Effective Seismic Weight . . . 61
7.2.3 Component Gravity Loads and Load Combinations . . . 61
7.2.3.1 Dead Load . . . 61
7.2.3.2 Live Load . . . 61
7.2.3.3 Snow Load . . . 61

7.2.4 Mathematical Modeling . . . 62
7.2.4.1 Basic Assumptions . . . 62
7.2.4.2 Torsion . . . 62
7.2.4.3 Primary and Secondary Components . . . 63
7.2.4.4 Stiffness and Strength Assumptions . . . 64
7.2.4.5 Foundation Modeling . . . 64
7.2.4.6 Damping . . . 64
7.2.5 Configuration . . . 64
7.2.6 Multidirectional Seismic Effects . . . 64
7.2.6.1 Concurrent Seismic Effects . . . 64
7.2.6.2 Vertical Seismic Effects . . . 65
7.2.7 P-delta Effects . . . 65
7.2.8 Soil–Structure Interaction . . . 65
7.2.9 Overturning . . . 65
7.2.9.1 Overturning Effects for Linear Procedures . . . 65
7.2.9.2 Overturning Effects for Nonlinear Procedures . . . 66
7.2.10 Sliding at the Soil–Structure Interface . . . 66
7.2.10.1 Foundation Interconnection . . . 66
7.2.11 Diaphragms, Chords, Collectors, and Ties . . . 66
7.2.11.1 Classification of Diaphragms . . . 66
7.2.11.2 Mathematical Modeling . . . 67
7.2.11.3 Diaphragm Chords . . . 67
7.2.11.4 Diaphragm Collectors . . . 67
7.2.11.5 Diaphragm Ties . . . 67
7.2.12 Continuity . . . 67
7.2.13 Structural Walls and Their Anchorage . . . 67
7.2.13.1 Out-of-Plane Wall Anchorage to Diaphragms . . . 67
7.2.13.2 Out-of-Plane Strength of Walls . . . 68
7.2.14 Structures Sharing Common Elements . . . 68
7.2.14.1 Interconnection . . . 68
7.2.14.2 Separation . . . 68
7.2.15 Building Separation . . . 68
7.2.15.1 Minimum Separation . . . 68
7.2.15.2 Separation Exceptions . . . 69
7.2.16 Verification of Analysis Assumptions . . . 69
7.3 Analysis Procedure Selection . . . 69
7.3.1 Linear Procedures . . . 69
7.3.1.1 Method to Determine Limitations on Use of Linear Procedures . . . 69
7.3.1.2 Limitations on Use of the Linear Static Procedure . . . 70
7.3.2 Nonlinear Procedures . . . 70
7.3.2.1 Nonlinear Static Procedure . . . 70
7.3.2.2 Nonlinear Dynamic Procedure . . . 71
7.3.3 Alternative Rational Analysis . . . 71
7.4 Analysis Procedures . . . 71
7.4.1 Linear Static Procedure . . . 71
7.4.1.1 Basis of the Procedure . . . 71
7.4.1.2 Period Determination for Linear Static Procedure . . . 71
7.4.1.3 Determination of Forces and Deformations for Linear Static Procedure . . . 71
7.4.1.4 Damping for Linear Static Procedure . . . 73
7.4.2 Linear Dynamic Procedure . . . 73
7.4.2.1 Basis of the Procedure . . . 73
7.4.2.2 Modeling and Analysis Considerations for Linear Dynamic Procedure . . . 73
7.4.2.3 Determination of Forces and Deformations for Linear Dynamic Procedure . . . 74
7.4.2.4 Damping for Linear Dynamic Procedure . . . 74
7.4.3 Nonlinear Static Procedure . . . 74
7.4.3.1 Basis of the Procedure . . . 74
7.4.3.2 Modeling and Analysis Considerations for Nonlinear Static Procedure . . . 74
7.4.3.3 Determination of Forces, Displacements, and Deformations for Nonlinear Static Procedure . . . 75
7.4.3.4 Damping for Nonlinear Static Procedure . . . 77
7.4.4 Nonlinear Dynamic Procedure . . . 77
7.4.4.1 Basis of the Procedure . . . 77
7.4.4.2 Modeling and Analysis Considerations for Nonlinear Dynamic Procedure . . . 77
7.4.4.3 Determination of Forces and Deformations for Nonlinear Dynamic Procedure 78
7.4.4.4 Damping for Nonlinear Dynamic Procedure . . . 78

7.5 Acceptance Criteria . . . 79
7.5.1 General Requirements . . . 79
7.5.1.1 Deformation-Controlled and Force-Controlled Actions . . . 79
7.5.1.2 Critical and Noncritical Actions . . . 80
7.5.1.3 Expected and Lower-Bound Strengths . . . 80
7.5.1.4 Material Properties . . . 80
7.5.1.5 Component Capacities . . . 80
7.5.2 Linear Procedures . . . 80
7.5.2.1 Forces and Deformations . . . 80
7.5.2.2 Acceptance Criteria for Linear Procedures . . . 81
7.5.3 Nonlinear Procedures . . . 81
7.5.3.1 Forces and Deformations . . . 81
7.5.3.2 Acceptance Criteria for Nonlinear Procedures . . . 81
7.6 Experimentally Derived Modeling Parameters and Acceptance Criteria . . . 83
7.6.1 Criteria for General Use Parameters . . . 83
7.6.1.1 Experimental Test Data . . . 83
7.6.1.2 Analytical Model Data . . . 83
7.6.2 Criteria for Individual Project Testing . . . 83
7.6.2.1 Experimental Setup . . . 83
7.6.2.2 Data Reduction and Reporting . . . 83
7.6.2.3 Peer Review . . . 84
7.6.3 Modeling Parameters and Acceptance Criteria for Nonadaptive Force–Deformation Curves 84
7.6.4 Modeling Parameters and Acceptance Criteria for Component Actions Based on Experimental Data for Fiber Models . . . 87
7.6.5 Modeling Parameters and Acceptance Criteria for Component Actions Based on Experimental Data for Adaptive Force–Deformation Models in the Mathematical Model . . . 87

8 FOUNDATIONS, SUBSURFACE SOIL, AND GEOLOGIC SITE HAZARDS . . . 89
8.1 Scope . . . 89
8.2 Site Characterization . . . 89
8.2.1 Subsurface Soil Foundation Information . . . 89
8.2.1.1 Subsurface Soil Conditions . . . 89
8.2.1.2 Foundation Conditions . . . 89
8.2.1.3 Load–Deformation Characteristics of Subsurface Soil under Seismic Loading 89
8.2.1.4 Soil Shear Modulus and Poisson's Ratio Parameters . . . 89
8.2.2 Seismic–Geologic Site Hazards . . . 90
8.2.2.1 Fault Rupture . . . 90
8.2.2.2 Liquefaction . . . 90
8.2.2.3 Settlement of Nonliquefiable Soils . . . 92
8.2.2.4 Landsliding . . . 92
8.2.2.5 Flooding or Inundation . . . 92
8.3 Mitigation of Seismic–Geologic Site Hazards . . . 92
8.4 Shallow Foundations . . . 92
8.4.1 Selection of Evaluation Procedures . . . 92
8.4.2 Expected Soil Bearing Capacities . . . 93
8.4.2.1 Prescriptive Expected Soil Bearing Capacities . . . 93
8.4.2.2 Site-Specific Capacities . . . 93
8.4.3 Simplified Procedure . . . 93
8.4.4 Fixed-Base Procedure . . . 93
8.4.4.1 Linear Procedures . . . 93
8.4.4.2 Nonlinear Procedures . . . 97
8.4.5 Flexible-Base Procedure . . . 97
8.4.5.1 Soil Stiffness . . . 98
8.4.5.2 Linear Procedures . . . 98
8.4.5.3 Nonlinear Procedures . . . 99
8.4.6 Shallow Foundation Lateral Load . . . 101
8.5 Deep Foundations . . . 101
8.5.1 Pile Foundations . . . 101
8.5.1.1 Stiffness Parameters . . . 102
8.5.1.2 Capacity Parameters . . . 102
8.5.2 Drilled Shafts . . . 102
8.5.3 Deep Foundation Acceptance Criteria . . . 102
8.5.3.1 Linear Procedures . . . 103
8.5.3.2 Nonlinear Procedures . . . 103

8.6 Soil–Structure Interaction Effects . . . 103
8.6.1 Kinematic Interaction . . . 103
8.6.1.1 Base Slab Averaging . . . 103
8.6.1.2 Embedment . . . 104
8.6.2 Foundation Damping Soil–Structure Interaction Effects . . . 104
8.6.2.1 Radiation Damping for Rectangular Foundations . . . 104
8.6.2.2 Soil Hysteretic Damping . . . 105
8.7 Seismic Earth Pressure . . . 105
8.8 Foundation Retrofit . . . 106

9 STEEL AND IRON . . . 107
9.1 Scope . . . 107
9.2 Reference Standard for Structural Steel, Composite Steel–Concrete, and Cast and Wrought Iron . . . 107
9.3 Modification to the Reference Standard for Structural Steel, Composite Steel–Concrete, and Cast and Wrought Iron . . . 107
9.4 Material Properties and Condition Assessment for Cold-Formed Steel . . . 107
9.4.1 General . . . 107
9.4.2 Properties of In-Place Materials and Components . . . 107
9.4.2.1 Material Properties . . . 107
9.4.2.2 Component Properties . . . 108
9.4.2.3 Test Methods to Quantify Mechanical Properties . . . 108
9.4.2.4 Minimum Number of Tests . . . 108
9.4.2.5 Default Mechanical Properties . . . 108
9.4.3 Condition Assessment . . . 109
9.4.3.1 General . . . 109
9.4.3.2 Scope and Procedures . . . 109
9.4.3.3 Basis for the Mathematical Building Model . . . 109
9.4.4 Knowledge Factor . . . 109
9.5 General Assumptions and Requirements for Cold-Formed Steel . . . 109
9.5.1 Stiffness . . . 109
9.5.1.1 Use of Linear Procedures for Cold-Formed Steel Light-Frame Construction . . . 109
9.5.1.2 Use of Nonlinear Procedures for Cold-Formed Steel Light-Frame Construction . . . 109
9.5.2 Strength and Acceptance Criteria . . . 110
9.5.2.1 General . . . 110
9.5.2.2 Deformation-Controlled Actions . . . 110
9.5.2.3 Force-Controlled Actions . . . 110
9.5.2.4 Anchorage to Concrete . . . 110
9.5.3 Connection Requirements in Cold-Formed Steel Light-Frame Construction . . . 110
9.5.4 Components Supporting Discontinuous Shear Walls in Cold-Formed Steel Light-Frame Construction . . . 110
9.5.5 Retrofit Measures . . . 110
9.6 Cold-Formed Steel Light-Frame Construction, Shear Wall Systems . . . 111
9.6.1 General . . . 111
9.6.2 Types of Cold-Formed Steel Light-Frame Construction, Shear Wall Systems . . . 111
9.6.2.1 Existing Cold-Formed Steel Light-Frame Shear Walls . . . 111
9.6.2.2 Enhanced Cold-Formed Steel Light-Frame Shear Walls . . . 111
9.6.2.3 New Cold-Formed Steel Light-Frame Shear Walls . . . 111
9.6.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Cold-Formed Steel Light-Frame Construction Shear Wall Systems . . . 111
9.6.3.1 Wood Structural Panels . . . 111
9.6.3.2 Steel Sheet Sheathing . . . 111
9.6.3.3 Gypsum Board Panel . . . 112
9.6.3.4 Fiberboard Panels . . . 114
9.6.3.5 Plaster on Metal Lath Shear Walls . . . 114
9.7 Cold-Formed Steel Moment-Frame Systems . . . 114
9.7.1 General . . . 114
9.7.2 Types of Cold-Formed Steel Moment-Frame Systems . . . 114
9.7.2.1 Existing Cold-Formed Steel Moment-Frame Systems . . . 114
9.7.2.2 Enhanced Cold-Formed Steel Moment-Frame Systems . . . 114
9.7.2.3 New Cold-Formed Steel Moment-Frame Systems . . . 114
9.7.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Cold-Formed Steel Moment-Frame Systems . . . 114
9.7.3.1 Generic Cold-Formed Steel Moment Connection . . . 114

9.7.3.2 Cold-Formed Steel Special Bolted Moment Frame . . . 116
9.8 Cold-Formed Steel Light-Frame Construction, Strap-Braced Wall Systems . . . 116
9.8.1 General . . . 116
9.8.2 Types of Cold-Formed Steel Light-Frame Construction with Strap-Braced Walls . . . 116
9.8.2.1 Existing Cold-Formed Steel Light-Frame Construction with Strap-Braced Walls . . . 116
9.8.2.2 Cold-Formed Steel Light-Frame Construction with Enhanced Strap-Braced Walls . . . 116
9.8.2.3 Cold-Formed Steel Light-Frame Construction with New Strap-Braced Walls . . . 116
9.8.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Cold-Formed Steel Light-Frame Construction with Strap-Braced Walls . . . 117
9.8.3.1 Stiffness . . . 117
9.8.3.2 Strength . . . 117
9.8.3.3 Acceptance Criteria . . . 117
9.8.3.4 Connections . . . 117
9.9 Cold-Formed Steel Diaphragms . . . 117

10 CONCRETE . . . 119
10.1 Scope . . . 119
10.2 Reference Standard . . . 119
10.3 Modifications to the Reference Standard . . . 119
10.3.1 General Assumptions and Requirements . . . 119
10.3.2 Concrete Structural Walls . . . 122
10.3.3 Concrete Foundations . . . 132
10.3.4 Notation . . . 134

11 MASONRY . . . 137
11.1 Scope . . . 137
11.2 Condition Assessment and Material Properties . . . 137
11.2.1 General . . . 137
11.2.2 Condition Assessment . . . 137
11.2.2.1 Visual Condition Assessment . . . 137
11.2.2.2 Comprehensive Condition Assessment . . . 138
11.2.2.3 Supplemental Tests . . . 138
11.2.2.4 Condition Enhancement . . . 138
11.2.2.5 Pointing or Repointing of Unreinforced Masonry Walls . . . 138
11.2.3 Properties of In-Place Materials and Components . . . 138
11.2.3.1 General . . . 138
11.2.3.2 Nominal or Specified Properties . . . 138
11.2.3.3 Masonry Compressive Strength . . . 138
11.2.3.4 Masonry Elastic Modulus in Compression . . . 138
11.2.3.5 Masonry Flexural Tensile Strength . . . 139
11.2.3.6 Unreinforced Masonry Shear Strength . . . 139
11.2.3.7 Masonry Shear Modulus . . . 140
11.2.3.8 Steel Reinforcement Yield Strength Properties . . . 140
11.2.3.9 Minimum Number of Tests . . . 140
11.2.3.10 Default Properties . . . 141
11.2.4 Knowledge Factor . . . 141
11.3 Masonry Walls . . . 141
11.3.1 Types of Masonry Walls . . . 141
11.3.1.1 Existing Masonry Walls . . . 141
11.3.1.2 New Masonry Walls . . . 142
11.3.1.3 Retrofitted Masonry Walls . . . 142
11.3.2 Unreinforced Masonry Walls and Wall Piers Subject to In-Plane Actions . . . 142
11.3.2.1 Stiffness of URM Walls and Wall Piers Subject to In-Plane Actions . . . 142
11.3.2.2 Strength of URM Walls Subject to In-Plane Actions . . . 142
11.3.2.3 Acceptance Criteria for URM In-Plane Actions . . . 145
11.3.3 Unreinforced Masonry Walls Subject to Out-of-Plane Actions . . . 145
11.3.3.1 Stiffness of URM Walls Subject to Out-of-Plane Actions . . . 145
11.3.3.2 Strength of URM Walls Subject to Out-of-Plane Actions . . . 146
11.3.3.3 Acceptance Criteria for URM Walls Subject to Out-of-Plane Actions . . . 146
11.3.4 Reinforced Masonry Walls and Wall Piers In-Plane Actions . . . 148

11.3.4.1 Reinforced Masonry Walls and Wall Piers with Flanged Sections . . . 148
11.3.4.2 In-Plane Lateral Stiffness of Reinforced Masonry Walls and Wall Piers . . . 148
11.3.4.3 Flexure-Governed In-Plane Actions of Reinforced Masonry Walls and Wall Piers 149
11.3.4.4 Shear-Governed In-Plane Actions of Reinforced Masonry Walls and Wall Piers 151
11.3.4.5 Vertical Compressive Strength of Walls and Wall Piers . . . 151
11.3.4.6 Acceptance Criteria for In-Plane Actions of Reinforced Masonry Walls and Wall Piers . . . 151
11.3.5 Reinforced Masonry Wall Out-of-Plane Actions . . . 152
11.3.5.1 Stiffness: Reinforced Masonry Wall Out-of-Plane Actions . . . 152
11.3.5.2 Strength: Reinforced Masonry Wall Out-of-Plane Actions . . . 152
11.3.5.3 Acceptance Criteria for Reinforced Masonry Wall Out-of-Plane Actions . . . 152
11.4 Masonry Infills . . . 152
11.4.1 Types of Masonry Infills . . . 153
11.4.1.1 Existing Masonry Infills . . . 153
11.4.1.2 New Masonry Infills . . . 153
11.4.1.3 Retrofitted Masonry Infills . . . 153
11.4.2 Masonry Infill In-Plane Actions . . . 153
11.4.2.1 Stiffness: Masonry Infill In-Plane Actions . . . 153
11.4.2.2 Stiffness: Masonry Infill with Openings In-Plane Actions . . . 153
11.4.2.3 Strength: Infilled Reinforced Concrete Frames In-Plane Actions . . . 154
11.4.2.4 Strength: Infilled Steel Frames In-Plane Actions . . . 155
11.4.2.5 Drift: Infill Wall In-Plane Actions . . . 155
11.4.2.6 Strut Model for Infill In-Plane Actions . . . 155
11.4.2.7 Acceptance Criteria for Infill Wall In-Plane Actions . . . 156
11.4.3 Masonry Infill Wall Out-of-Plane Actions . . . 157
11.4.3.1 Stiffness: Infill Wall Out-of-Plane Actions . . . 157
11.4.3.2 Strength: Infill Wall Out-of-Plane Actions . . . 157
11.4.3.3 Strength: Infill Wall In-Plane and Out-of-Plane Interaction . . . 158
11.4.3.4 Acceptance Criteria: Infill Wall Out-of-Plane Actions . . . 158
11.5 Anchorage to Masonry Walls . . . 158
11.5.1 Types of Anchors . . . 158
11.5.2 Analysis of Anchors . . . 158
11.5.3 Quality Assurance for Anchors in Masonry Walls . . . 158
11.6 Masonry Foundation Elements . . . 159
11.6.1 Types of Masonry Foundations . . . 159
11.6.2 Seismic Evaluation of Existing Masonry Foundations . . . 159
11.6.3 Foundation Retrofit Measures . . . 159
11.7 Masonry Diaphragms . . . 159
11.7.1 General . . . 159
11.7.2 Seismic Evaluation of Masonry Diaphragms . . . 159
11.7.3 Retrofit Measures for Masonry Diaphragms . . . 159

12 WOOD . . . 161
12.1 Scope . . . 161
12.2 Material Properties and Condition Assessment . . . 161
12.2.1 General . . . 161
12.2.2 Properties of In-Place Materials and Components . . . 161
12.2.2.1 Material Properties . . . 161
12.2.2.2 Component Properties . . . 161
12.2.2.3 Test Methods to Quantify Material Properties . . . 162
12.2.2.4 Minimum Number of Tests . . . 162
12.2.2.5 Default Properties . . . 162
12.2.3 Condition Assessment . . . 162
12.2.3.1 General . . . 162
12.2.3.2 Scope and Procedures for Condition Assessment . . . 164
12.2.3.3 Basis for the Mathematical Building Model . . . 164
12.2.4 Knowledge Factor . . . 164
12.2.4.1 Wood Components and Assemblies . . . 164
12.3 General Assumptions and Requirements . . . 164
12.3.1 Stiffness . . . 164
12.3.1.1 Use of Linear Procedures . . . 164
12.3.1.2 Use of Nonlinear Procedures for Wood Construction . . . 164
12.3.2 Strength and Acceptance Criteria . . . 164
12.3.2.1 General . . . 164

12.3.2.2 Deformation-Controlled Actions . . . 164
12.3.2.3 Force-Controlled Actions . . . 164
12.3.3 Connection Requirements . . . 165
12.3.3.1 Wood Construction. . . . 165
12.3.4 Components Supporting Discontinuous Shear Walls . . . 165
12.3.4.1 Wood Construction. . . . 165
12.3.5 Retrofit Measures . . . 165
12.3.5.1 Wood Construction. . . . 165
12.4 Wood Shear Walls . . . 165
12.4.1 General . . . 165
12.4.2 Types of Wood Shear Walls. . . . 165
12.4.2.1 Existing Wood Shear Walls . . . 165
12.4.2.2 Enhanced Wood Shear Walls . . . 166
12.4.2.3 New Wood Shear Walls . . . 166
12.4.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Wood Shear Walls . . . 166
12.4.3.1 Single-Layer Horizontal Lumber Sheathing or Siding Shear Walls . . . 166
12.4.3.2 Diagonal Lumber Sheathing Shear Walls . . . 166
12.4.3.3 Vertical Wood Siding Shear Walls . . . 166
12.4.3.4 Wood Siding Over Horizontal Lumber Sheathing Shear Walls . . . 170
12.4.3.5 Wood Siding Over Diagonal Lumber Sheathing ShearWalls. . . . 170
12.4.3.6 Wood Structural Panel Sheathing or Siding Shear Walls. . . . 170
12.4.3.7 Stucco on Studs, Sheathing, or Fiberboard Shear Walls . . . 170
12.4.3.8 Gypsum Plaster on Wood Lath Shear Walls . . . 171
12.4.3.9 Gypsum Plaster on Gypsum Lath Shear Walls . . . 171
12.4.3.10 Gypsum Wallboard Shear Walls. . . . 171
12.4.3.11 Gypsum Sheathing Shear Walls . . . 171
12.4.3.12 Plaster on Metal Lath Shear Walls . . . 171
12.4.3.13 Horizontal Lumber Sheathing with Cut-In Braces or Diagonal Blocking Shear Walls . . . 172
12.4.3.14 Fiberboard or Particleboard Sheathing Shear Walls. . . . 172
12.5 Wood Diaphragms . . . 172
12.5.1 General . . . 172
12.5.2 Types of Wood Diaphragms. . . . 172
12.5.2.1 Existing Wood Diaphragms . . . 172
12.5.2.2 Enhanced Wood Diaphragms . . . 173
12.5.2.3 New Wood Diaphragms . . . 173
12.5.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Wood Diaphragms . . . 173
12.5.3.1 Single-Layer Straight Lumber Sheathing Diaphragms . . . 173
12.5.3.2 Double-Layer Straight Lumber Sheathing Diaphragms . . . 173
12.5.3.3 Single-Layer Diagonal Lumber Sheathing Diaphragms. . . . 173
12.5.3.4 Diagonal Lumber Sheathing with Straight Lumber Sheathing or Flooring above Diaphragms. . . . 174
12.5.3.5 Double-Layer Diagonal Lumber Sheathing Diaphragms . . . 174
12.5.3.6 Wood Structural Panel Sheathing Diaphragm. . . . 174
12.5.3.7 Wood Structural Panel Overlays on Straight or Diagonal Lumber Sheathing Diaphragms. . . . 175
12.5.3.8 Wood Structural Panel Overlays on Existing Wood Structural Panel Sheathing Diaphragms. . . . 175
12.5.3.9 Braced Horizontal Diaphragms . . . 175
12.6 Wood Foundations . . . 175
12.6.1 Types of Wood Foundations. . . . 175
12.6.2 Analysis, Strength, and Acceptance Criteria for Wood Foundations . . . 175
12.6.3 Retrofit Measures for Wood Foundations . . . 175
12.7 Other Wood Elements and Components. . . . 175
12.7.1 General . . . 175
12.7.1.1 Stiffness of Other Wood Elements and Components . . . 176
12.7.1.2 Strength of Other Wood Elements and Components . . . 176
12.7.1.3 Acceptance Criteria for Other Wood Elements and Components. . . . 176

13 ARCHITECTURAL, MECHANICAL, AND ELECTRICAL COMPONENTS . . . 177
13.1 Scope . . . 177
13.2 Evaluation and Retrofit Procedure for Nonstructural Components . . . 177
13.2.1 Classification of Components . . . 177
13.3 Component Condition Assessment and Anchorage Testing . . . 179

13.3.1 Condition Assessment . . . 179
13.3.2 Testing Requirements for Evaluating the Performance of Existing Anchorage for Nonstructural Components . . . 180
13.3.2.1 Components Evaluated to the Operational Performance Level . . . 180
13.3.2.2 Components Evaluated to the Position Retention or Life Safety Performance Level . . . 180
13.3.2.3 Tension Testing Procedure . . . 181
13.3.2.4 Torque Testing Procedure . . . 181
13.3.2.5 Alternate Test Criteria . . . 181
13.3.2.6 Shear Capacity of Existing Anchors . . . 181
13.4 Evaluation Procedures . . . 181
13.4.1 Acceptance Criteria . . . 181
13.4.2 Analytical Procedure . . . 181
13.4.3 Prescriptive Procedure . . . 182
13.4.4 Force Analysis: General Equations . . . 182
13.4.4.1 Horizontal Seismic Forces . . . 182
13.4.4.2 Vertical Seismic Forces . . . 182
13.4.4.3 Load Combinations . . . 182
13.4.4.4 Nonstructural Support Capacity . . . 182
13.4.5 Deformation Analysis . . . 185
13.4.6 Component Testing . . . 185
13.4.7 Overturning Evaluation . . . 185
13.5 Retrofit Approaches . . . 185
13.6 Architectural Components: Definition, Behavior, and Acceptance Criteria . . . 185
13.6.1 Exterior Wall Components . . . 185
13.6.1.1 Adhered Veneer . . . 185
13.6.1.2 Anchored Veneer . . . 186
13.6.1.3 Glass Block Units and Other Nonstructural Masonry . . . 186
13.6.1.4 Prefabricated Panels . . . 187
13.6.1.5 Glazed Exterior Wall Systems . . . 187
13.6.2 Partitions . . . 188
13.6.2.1 Definition and Scope . . . 188
13.6.2.2 Component Behavior and Retrofit Methods . . . 188
13.6.2.3 Acceptance Criteria . . . 188
13.6.2.4 Evaluation Requirements . . . 189
13.6.3 Interior Veneers . . . 189
13.6.3.1 Definition and Scope . . . 189
13.6.3.2 Component Behavior and Retrofit Methods . . . 189
13.6.3.3 Acceptance Criteria . . . 189
13.6.3.4 Evaluation Requirements . . . 189
13.6.4 Ceilings . . . 189
13.6.4.1 Definition and Scope . . . 189
13.6.4.2 Component Behavior and Retrofit Methods . . . 189
13.6.4.3 Acceptance Criteria . . . 189
13.6.4.4 Evaluation Requirements . . . 189
13.6.5 Parapets and Cornices . . . 189
13.6.5.1 Definition and Scope . . . 189
13.6.5.2 Component Behavior and Retrofit Methods . . . 190
13.6.5.3 Acceptance Criteria . . . 190
13.6.5.4 Evaluation Requirements . . . 190
13.6.6 Architectural Appendages and Marquees . . . 190
13.6.6.1 Definition and Scope . . . 190
13.6.6.2 Component Behavior and Retrofit Methods . . . 190
13.6.6.3 Acceptance Criteria . . . 190
13.6.6.4 Evaluation Requirements . . . 190
13.6.7 Penthouses . . . 190
13.6.7.1 Definition and Scope . . . 190
13.6.7.2 Component Behavior and Retrofit Methods . . . 190
13.6.7.3 Acceptance Criteria . . . 190
13.6.8 Tile Roofs . . . 190
13.6.8.1 Definition and Scope . . . 190
13.6.8.2 Component Behavior and Retrofit Methods . . . 191
13.6.8.3 Acceptance Criteria . . . 191
13.6.9 Chimneys and Stacks . . . 191
13.6.9.1 Definition and Scope . . . 191

13.6.9.2 Component Behavior and Retrofit Methods . . . 191
13.6.9.3 Acceptance Criteria . . . 191
13.6.9.4 Evaluation Requirements . . . 191
13.6.10 Stairs and Ramps . . . 191
13.6.10.1 Definition and Scope . . . 191
13.6.10.2 Component Behavior and Retrofit Methods . . . 191
13.6.10.3 Acceptance Criteria . . . 191
13.6.10.4 Evaluation Requirements . . . 192
13.6.11 Doors Required for Emergency Services Egress in Essential Facilities . . . 192
13.6.11.1 Definition and Scope . . . 192
13.6.11.2 Component Behavior and Retrofit Methods . . . 192
13.6.11.3 Acceptance Criteria . . . 192
13.6.11.4 Evaluation Requirements . . . 192
13.6.12 Computer Access Floors . . . 192
13.6.12.1 Definition and Scope . . . 192
13.6.12.2 Component Behavior and Retrofit Methods . . . 192
13.6.12.3 Acceptance Criteria . . . 192
13.6.12.4 Evaluation Requirements . . . 192
13.7 Mechanical, Electrical, and Plumbing Components: Definition, Behavior, and Acceptance Criteria . . . 192
13.7.1 Mechanical Equipment . . . 192
13.7.1.1 Definition and Scope . . . 192
13.7.1.2 Component Behavior and Retrofit Methods . . . 193
13.7.1.3 Acceptance Criteria . . . 193
13.7.1.4 Evaluation Requirements . . . 193
13.7.2 Storage Vessels and Water Heaters . . . 193
13.7.2.1 Definition and Scope . . . 193
13.7.2.2 Component Behavior and Retrofit Methods . . . 193
13.7.2.3 Acceptance Criteria . . . 193
13.7.2.4 Evaluation Requirements . . . 194
13.7.3 Pressure Piping . . . 194
13.7.3.1 Definition and Scope . . . 194
13.7.3.2 Component Behavior and Retrofit Methods . . . 194
13.7.3.3 Acceptance Criteria . . . 194
13.7.3.4 Evaluation Requirements . . . 194
13.7.4 Fire Suppression Piping . . . 194
13.7.4.1 Definition and Scope . . . 194
13.7.4.2 Component Behavior and Retrofit Methods . . . 194
13.7.4.3 Acceptance Criteria . . . 194
13.7.4.4 Evaluation Requirements . . . 194
13.7.5 Fluid Piping Other than Fire Suppression . . . 194
13.7.5.1 Definition and Scope . . . 194
13.7.5.2 Component Behavior and Retrofit Methods . . . 195
13.7.5.3 Acceptance Criteria . . . 195
13.7.5.4 Evaluation Requirements . . . 195
13.7.6 Ductwork . . . 195
13.7.6.1 Definition and Scope . . . 195
13.7.6.2 Component Behavior and Retrofit Methods . . . 195
13.7.6.3 Acceptance Criteria . . . 195
13.7.6.4 Evaluation Requirements . . . 195
13.7.7 Electrical and Communications Equipment . . . 196
13.7.7.1 Definition and Scope . . . 196
13.7.7.2 Component Behavior and Retrofit Methods . . . 196
13.7.7.3 Acceptance Criteria . . . 196
13.7.7.4 Evaluation Requirements . . . 196
13.7.8 Electrical and Communications Distribution Components . . . 196
13.7.8.1 Definition and Scope . . . 196
13.7.8.2 Component Behavior and Retrofit Methods . . . 196
13.7.8.3 Acceptance Criteria . . . 196
13.7.8.4 Evaluation Requirements . . . 197
13.7.9 Light Fixtures . . . 197
13.7.9.1 Definition and Scope . . . 197
13.7.9.2 Component Behavior and Retrofit Methods . . . 197
13.7.9.3 Acceptance Criteria . . . 197
13.7.9.4 Evaluation Requirements . . . 197
13.7.10 Rooftop Solar Photovoltaic Arrays . . . 197

13.7.10.1 Definition and Scope . . . 197
13.7.10.2 Component Behavior and Retrofit Methods . . . 197
13.7.10.3 Acceptance Criteria . . . 197
13.7.10.4 Evaluation Requirements . . . 197
13.7.11 Elevators . . . 198
13.7.11.1 Definition and Scope . . . 198
13.7.11.2 Component Behavior and Retrofit Methods . . . 198
13.7.11.3 Acceptance Criteria . . . 198
13.7.11.4 Evaluation Requirements . . . 198
13.7.12 Conveyors . . . 198
13.7.12.1 Definition and Scope . . . 198
13.7.12.2 Component Behavior and Retrofit Methods . . . 198
13.7.12.3 Acceptance Criteria . . . 198
13.7.12.4 Evaluation Requirements . . . 198
13.8 Furnishings and Contents: Definition, Behavior, and Acceptance Criteria . . . 198
13.8.1 Steel Storage Racks . . . 198
13.8.1.1 Definition and Scope . . . 198
13.8.1.2 Component Behavior and Retrofit Methods . . . 198
13.8.1.3 Acceptance Criteria . . . 198
13.8.1.4 Evaluation Requirements . . . 199
13.8.2 Contents . . . 199
13.8.2.1 Definition and Scope . . . 199
13.8.2.2 Component Behavior and Retrofit Methods . . . 199
13.8.2.3 Acceptance Criteria . . . 199
13.8.2.4 Evaluation Requirements . . . 199
13.8.3 Hazardous Material Storage . . . 199
13.8.3.1 Definition and Scope . . . 199
13.8.3.2 Component Behavior and Retrofit Methods . . . 199
13.8.3.3 Acceptance Criteria . . . 199
13.8.3.4 Evaluation Requirements . . . 199
13.8.4 Computer and Communication Racks . . . 199
13.8.4.1 Definition and Scope . . . 199
13.8.4.2 Component Behavior and Retrofit Methods . . . 199
13.8.4.3 Acceptance Criteria . . . 199
13.8.4.4 Evaluation Requirements . . . 200

14 SEISMIC ISOLATION . . . 201
14.1 Scope . . . 201
14.2 General Requirements . . . 201
14.2.1 General . . . 201
14.2.2 Seismic Hazard . . . 201
14.2.2.1 Ground Motion Acceleration Histories . . . 201
14.2.3 Isolation System . . . 201
14.2.3.1 Environmental Conditions . . . 201
14.2.3.2 Wind Displacement . . . 201
14.2.3.3 Fire Resistance . . . 201
14.2.3.4 Lateral Restoring Force . . . 201
14.2.3.5 Displacement Restraint . . . 201
14.2.3.6 Vertical Load Stability . . . 202
14.2.3.7 Overturning . . . 202
14.2.3.8 Inspection and Replacement . . . 202
14.2.4 Structural System . . . 202
14.2.4.1 Horizontal Distribution of Force . . . 202
14.2.4.2 Minimum Separations . . . 202
14.2.5 Elements of Structures and Nonstructural Components . . . 202
14.2.5.1 General . . . 202
14.2.5.2 Components at or above the Isolation Interface . . . 202
14.2.5.3 Components Crossing the Isolation Interface . . . 202
14.2.5.4 Components below the Isolation Interface . . . 202
14.2.6 Seismic Load Effects and Load Combinations . . . 202
14.2.6.1 General . . . 202
14.2.6.2 Isolation System Device Vertical Load Combinations . . . 203
14.3 Seismic Isolation System Device Properties . . . 203
14.3.1 Isolation System Device Types . . . 203

14.3.2 Nominal Design Properties of Isolation System Devices . . . 203
14.3.3 Bounding Properties of Isolation System Devices . . . 203
14.3.3.1 Specification Tolerance on Design Properties . . . 203
14.3.3.2 Testing Variations on Design Properties . . . 203
14.3.3.3 Aging and Environmental Effects on Design Properties . . . 203
14.3.4 Property Modification Factors . . . 203
14.3.5 Upper- and Lower-Bound Properties . . . 203
14.4 Modeling . . . 204
14.4.1 Isolation System Device Modeling . . . 204
14.4.1.1 Upper-Bound and Lower-Bound Force–Deflection Behavior of Isolation System Devices . . . 204
14.4.1.2 Isolation System Properties . . . 204
14.4.1.3 Isolation System Models for Linear Procedures . . . 204
14.4.1.4 Isolation System Device Models for Nonlinear Procedures . . . 204
14.4.2 Isolation System and Superstructure Modeling . . . 204
14.4.2.1 General . . . 204
14.4.2.2 Isolation System Model . . . 204
14.4.2.3 Superstructure Model . . . 204
14.5 Analysis Procedures . . . 204
14.5.1 Selection of Analysis Procedure . . . 204
14.5.1.1 Linear Static Procedure . . . 205
14.5.1.2 Linear Dynamic Procedure . . . 205
14.5.1.3 Nonlinear Static Procedure . . . 205
14.5.1.4 Nonlinear Dynamic Procedure . . . 205
14.5.1.5 Design Forces and Deformations . . . 205
14.5.2 Linear Static Procedure . . . 205
14.5.2.1 General . . . 205
14.5.2.2 Minimum Lateral Displacements . . . 205
14.5.2.3 Minimum Lateral Forces . . . 206
14.5.2.4 Vertical Distribution of Force . . . 206
14.5.2.5 Design Forces and Deformations . . . 207
14.5.3 Linear Dynamic Procedure . . . 207
14.5.3.1 General . . . 207
14.5.3.2 Response Spectrum Method . . . 207
14.5.3.3 Isolation System and Structural Elements at or below the Base Level . . . 207
14.5.3.4 Structural Elements above the Base Level . . . 207
14.5.3.5 Scaling of Results . . . 207
14.5.3.6 Design Forces and Deformations . . . 207
14.5.4 Nonlinear Static Procedure . . . 207
14.5.4.1 General . . . 207
14.5.4.2 Target Displacement . . . 207
14.5.4.3 Seismic Force Pattern . . . 208
14.5.4.4 Design Forces and Deformations . . . 208
14.5.5 Nonlinear Dynamic Procedure . . . 208
14.5.5.1 General . . . 208
14.5.5.2 Accidental Mass Eccentricity . . . 208
14.5.5.3 Isolation System and Structural Elements at or below the Base Level . . . 208
14.5.5.4 Structural Elements above the Base Level . . . 208
14.5.5.5 Scaling of Results . . . 208
14.5.5.6 Design Forces and Deformations . . . 208
14.6 Isolation System Testing and Design Properties . . . 208
14.6.1 General . . . 208
14.6.2 Qualification Tests . . . 208
14.6.3 Prototype Tests . . . 208
14.6.3.1 General . . . 208
14.6.3.2 Record . . . 208
14.6.3.3 Sequence and Cycles . . . 208
14.6.3.4 Vertical-Load-Carrying Isolation System Devices . . . 209
14.6.3.5 Dynamic Testing . . . 209
14.6.3.6 Isolation System Devices Dependent on Bilateral Load . . . 209
14.6.3.7 Maximum and Minimum Vertical Load . . . 209
14.6.3.8 Sacrificial Wind-Restraint Systems . . . 209
14.6.3.9 Testing Similar Isolation System Devices . . . 209
14.6.4 Production Testing . . . 210
14.6.5 Determination of Force–Deflection Characteristics . . . 210

14.6.6 Test Specimen Adequacy . . . 210
14.7 Design Review . . . 211

15 DESIGN REQUIREMENTS FOR STRUCTURES WITH SUPPLEMENTAL ENERGY DISSIPATION . . . 213
15.1 Scope . . . 213
15.2 General Design Requirements . . . 213
15.2.1 General Requirements . . . 213
15.2.2 Seismic Hazard . . . 213
15.2.2.1 Ground Motion Acceleration Histories . . . 213
15.2.3 Damping Device Requirements . . . 213
15.2.3.1 Device Classification . . . 213
15.2.3.2 Multiaxis Movement . . . 213
15.2.3.3 Inspection and Periodic Testing . . . 213
15.2.3.4 Performance Objectives and System Redundancy . . . 214
15.3 Properties of Energy Dissipation Devices . . . 214
15.3.1 Nominal Design Properties . . . 214
15.3.2 Maximum and Minimum Damper Properties . . . 214
15.4 Analysis Procedure Selection . . . 214
15.4.1 General Limitations for the Linear Analysis Procedures . . . 214
15.5 Nonlinear Dynamic Procedures . . . 215
15.5.1 General Requirements . . . 215
15.5.2 Modeling of Energy Dissipation Devices . . . 215
15.5.2.1 Displacement-Dependent Devices . . . 215
15.5.2.2 Velocity-Dependent Devices . . . 215
15.5.2.3 Other Types of Devices . . . 216
15.5.3 Accidental Eccentricity . . . 216
15.6 Detailed System Requirements . . . 216
15.6.1 General . . . 216
15.6.2 Wind Forces . . . 216
15.6.3 Inspection and Replacement . . . 216
15.6.4 Maintenance . . . 216
15.7 Design Review . . . 216
15.8 Required Tests of Energy Dissipation Devices . . . 216
15.8.1 Prototype Tests . . . 216
15.8.1.1 General . . . 216
15.8.1.2 Sequence and Cycles of Testing . . . 216
15.8.1.3 Testing Similar Devices . . . 217
15.8.1.4 Determination of Force–Velocity–Displacement Characteristics . . . 217
15.8.1.5 Device Adequacy . . . 218
15.8.2 Production Tests . . . 218
15.9 Linear Analysis Procedures . . . 218
15.9.1 Modeling of Energy Dissipation Devices . . . 218
15.9.1.1 Displacement-Dependent Devices . . . 218
15.9.1.2 Velocity-Dependent Devices . . . 218
15.9.2 Linear Static Procedure . . . 219
15.9.2.1 Displacement-Dependent Devices . . . 219
15.9.2.2 Velocity-Dependent Devices . . . 219
15.9.2.3 Design Actions . . . 220
15.9.2.4 Linear Dynamic Procedure . . . 220
15.9.2.5 Displacement-Dependent Devices . . . 220
15.9.2.6 Velocity-Dependent Devices . . . 220
15.10 Nonlinear Static Procedure . . . 221
15.10.1 Displacement-Dependent Devices . . . 221
15.10.2 Velocity-Dependent Devices . . . 221

16 SYSTEM-SPECIFIC PERFORMANCE PROCEDURES . . . 223
16.1 Scope . . . 223
16.2 Special Procedure for Unreinforced Masonry . . . 223
16.2.1 Scope . . . 223
16.2.2 Condition of Existing Materials . . . 223
16.2.2.1 Layup of Walls . . . 223
16.2.2.2 Testing . . . 224
16.2.2.3 Masonry Strength . . . 225

16.2.3 Analysis . . . 225
16.2.3.1 Cross Walls. . . . 225
16.2.3.2 Diaphragms. . . . 226
16.2.3.3 Shear Walls. . . . 228
16.2.3.4 Buildings with Open Fronts . . . 228
16.2.3.5 New Vertical Elements. . . . 228
16.2.4 Other Components and Systems of Unreinforced Masonry Buildings . . . 229
16.2.4.1 References to Applicable Sections. . . . 229
16.2.4.2 Out-of-Plane Demands . . . 229
16.2.4.3 Wall Anchorage . . . 230
16.2.4.4 Truss and Beam Supports . . . 230
16.2.5 Detailing for New Elements . . . 230

17 TIER 1 CHECKLISTS . . . 231
17.1 Basic Checklists . . . 231
17.1.1 Very Low Seismicity Checklist . . . 231
17.1.2 Basic Configuration Checklist . . . 231
17.2 Structural Checklists for Building Types W1: Wood Light Frames, Small Residential . . . 231
17.3 Structural Checklists for Building Type W2: Wood Frames, Large Residential, Commercial, Industrial, and Institutional. . . . 231
17.4 Structural Checklists for Building Types S1: Steel Moment Frames with Stiff Diaphragms, and S1A: Steel Moment Frames with Flexible Diaphragms . . . 239
17.5 Structural Checklist for Building Types S2: Steel Braced Frames with Stiff Diaphragms, and S2A: Steel Braced Frames with Flexible Diaphragms. . . . 242
17.6 Structural Checklists for Building Type S3: Metal Building Frames. . . . 245
17.7 Structural Checklists for Building Type S4: Dual Systems with Backup Steel Moment Frames and Stiff Diaphragms. . . . 247
17.8 Structural Checklists for Building Types S5: Steel Frames with Infill Masonry Shear Walls and Stiff Diaphragms, and S5A: Steel Frames with Infill Masonry Shear Walls and Flexible Diaphragms . . . 247
17.9 Structural Checklists for Building Type CFS1: Cold-Formed Steel Light-Frame Bearing Wall Construction, Shear Wall Lateral System. . . . 255
17.10 Structural Checklists for Building Type CFS2: Cold-Formed Steel Light-Frame Bearing Wall Construction, Strap-Braced Lateral Wall System. . . . 255
17.11 Structural Checklists for Building Type C1: Concrete Moment Frames . . . 260
17.12 Structural Checklist for Building Types C2: Concrete Shear Walls with Stiff Diaphragms, and C2A: Concrete Shear Walls with Flexible Diaphragms . . . 260
17.13 Structural Checklists for Building Types C3: Concrete Frames with Infill Masonry Shear Walls, and C3A: Concrete Frames with Infill Masonry Shear Walls and Flexible Diaphragms . . . 260
17.14 Structural Checklists for Building Types PC1: Precast or Tilt-up Concrete Shear Walls with Flexible Diaphragms, and PC1a: Precast or Tilt-up Concrete Shear Walls with Stiff Diaphragms . . . 270
17.15 Structural Checklists for Building Type PC2: Precast Concrete Frames with Shear Walls . . . 274
17.16 Structural Checklists for Building Type PC2a: Precast Concrete Frames without Shear Walls . . . 277
17.17 Structural Checklists for Building Types RM1: Reinforced Masonry Bearing Walls with Flexible Diaphragms, and RM2: Reinforced Masonry Bearing Walls with Stiff Diaphragms . . . 277
17.18 Structural Checklists for Building Types URM: Unreinforced Masonry Bearing Walls with Flexible Diaphragms, and URMA: Unreinforced Masonry Bearing Walls with Stiff Diaphragms . . . 283
17.19 Nonstructural Checklist . . . 287

18 REFERENCE DOCUMENTS . . . 295
18.1 Consensus Standards and other Reference Documents . . . 295

APPENDIX A GUIDELINES FOR DEFICIENCY-BASED PROCEDURES . . . 299
A.1 General . . . 299
A.2 Procedures for Building Systems . . . 300
A.2.1 General . . . 300
A.2.1.1 Load Path. . . . 300
A.2.1.2 Adjacent Buildings . . . 300
A.2.1.3 Mezzanines . . . 301
A.2.2 Configuration. . . . 301
A.2.2.1 General . . . 301
A.2.2.2 Weak Story. . . . 301
A.2.2.3 Soft Story. . . . 302
A.2.2.4 Vertical Irregularities. . . . 302

A.2.2.5 Geometry . . . 303
A.2.2.6 Mass . . . 303
A.2.2.7 Torsion . . . 303
A.3 Procedures for Seismic-Force-Resisting Systems . . . 304
A.3.1 Moment Frames . . . 304
A.3.1.1 General . . . 305
A.3.1.2 Moment Frames with Infill Walls . . . 305
A.3.1.3 Steel Moment Frames . . . 305
A.3.1.4 Concrete Moment Frames . . . 307
A.3.1.5 Precast Concrete Moment Frames . . . 309
A.3.1.6 Frames Not Part of the Seismic-Force-Resisting System . . . 310
A.3.2 Shear Walls . . . 310
A.3.2.1 General . . . 310
A.3.2.2 Concrete Shear Walls . . . 311
A.3.2.3 Precast Concrete Shear Walls . . . 313
A.3.2.4 Reinforced Masonry Shear Walls . . . 313
A.3.2.5 Unreinforced Masonry Shear Walls . . . 314
A.3.2.6 Infill Walls in Frames . . . 314
A.3.2.7 Walls in Wood-Frame Buildings . . . 315
A.3.2.8 Cold-Formed Steel Light-Frame Construction, Shear Wall Systems . . . 316
A.3.3 Braced Frames . . . 318
A.3.3.1 General . . . 318
A.3.3.2 Concentrically Braced Frames . . . 319
A.3.3.3 Eccentrically Braced Frames . . . 321
A.4 Procedures for Diaphragms . . . 321
A.4.1 General . . . 321
A.4.1.1 Diaphragm Continuity . . . 323
A.4.1.2 Crossties . . . 323
A.4.1.3 Roof Chord Continuity . . . 323
A.4.1.4 Openings at Shear Walls . . . 324
A.4.1.5 Openings at Frames . . . 324
A.4.1.6 Openings at Exterior Masonry Shear Walls . . . 324
A.4.1.7 Plan Irregularities . . . 324
A.4.1.8 Diaphragm Reinforcement at Openings . . . 324
A.4.2 Wood Diaphragms . . . 325
A.4.2.1 Straight Sheathing . . . 325
A.4.2.2 Diagonally Sheathed and Unblocked Diaphragms . . . 325
A.4.2.3 Blocked Diaphragms . . . 325
A.4.2.4 Cantilevered Wood Diaphragms . . . 326
A.4.3 Metal Deck Diaphragms . . . 326
A.4.3.1 Non-Concrete-Filled Diaphragms . . . 326
A.4.4 Concrete Diaphragms . . . 326
A.4.5 Precast Concrete Diaphragms . . . 326
A.4.5.1 Topping Slab . . . 326
A.4.6 Horizontal Bracing . . . 327
A.4.7 Other Diaphragms . . . 327
A.4.7.1 Other Diaphragms . . . 327
A.5 Procedures for Connections . . . 327
A.5.1 Anchorage for Normal Forces . . . 327
A.5.1.1 Wall Anchorage . . . 327
A.5.1.2 Wood Ledgers . . . 327
A.5.1.3 Minimum Number of Wall Anchors Per Panel . . . 328
A.5.1.4 Stiffness of Wall Anchors . . . 328
A.5.2 Shear Transfer . . . 328
A.5.2.1 Transfer to Shear Walls or Concrete and Infill Walls . . . 328
A.5.2.2 Transfer to Steel Frames . . . 328
A.5.2.3 Topping Slab to Walls or Frames . . . 328
A.5.3 Vertical Components . . . 328
A.5.3.1 Steel Columns . . . 329
A.5.3.2 Concrete Columns . . . 329
A.5.3.3 Wood or Cold-Formed Steel Posts . . . 329
A.5.3.4 Wood Sills and Cold-Formed Steel Base Tracks . . . 329
A.5.3.5 Foundation Dowels . . . 330
A.5.3.6 Precast Wall Panels . . . 330
A.5.3.7 Wood Sill and Cold-Formed Steel Base Track Bolts . . . 330

A.5.3.8 Uplift at Pile Caps . . . 330
A.5.4 Interconnection of Elements . . . 330
A.5.4.1 Girder–Column Connection . . . 330
A.5.4.2 Girders . . . 330
A.5.4.3 Corbel Bearing . . . 331
A.5.4.4 Corbel Connections . . . 331
A.5.4.5 Beam, Girder, and Truss Supports . . . 331
A.5.5 Panel Connections . . . 331
A.5.5.1 Roof Panels . . . 331
A.5.5.2 Wall Panels . . . 331
A.6 Procedures for Geologic Site Hazards and Foundations . . . 331
A.6.1 Geologic Site Hazards . . . 331
A.6.1.1 Liquefaction . . . 331
A.6.1.2 Slope Failure . . . 331
A.6.1.3 Surface Fault Rupture . . . 332
A.6.1.4 Tsunami . . . 332
A.6.2 Foundation Configuration . . . 332
A.6.2.1 Overturning . . . 332
A.6.2.2 Ties between Foundation Elements . . . 332
A.6.2.3 Deep Foundations . . . 332
A.6.2.4 Sloping Sites . . . 333
A.7 Procedures for Nonstructural Components . . . 334
A.7.1 Partitions . . . 334
A.7.1.1 Unreinforced Masonry . . . 334
A.7.1.2 Drift . . . 334
A.7.1.3 Structural Separations . . . 334
A.7.1.4 Tops . . . 334
A.7.2 Ceiling Systems . . . 334
A.7.2.1 Heavy or Light Partitions Supported by Ceilings . . . 334
A.7.2.2 Integrated Ceilings . . . 334
A.7.2.3 Suspended Lath and Plaster or Gypsum Board . . . 335
A.7.2.4 Edge Clearance . . . 335
A.7.2.5 Continuity across Structure . . . 335
A.7.2.6 Edge Support . . . 335
A.7.2.7 Seismic Joints . . . 335
A.7.3 Light Fixtures . . . 335
A.7.3.1 Emergency Lighting . . . 335
A.7.3.2 Independent Support . . . 335
A.7.3.3 Pendant Supports . . . 335
A.7.3.4 Lens Covers . . . 335
A.7.4 Cladding and Glazing . . . 336
A.7.4.1 Cladding Anchors . . . 336
A.7.4.2 Cladding Isolation . . . 336
A.7.4.3 Multistory Panels . . . 336
A.7.4.4 Panel Connections . . . 336
A.7.4.5 Bearing Connections . . . 336
A.7.4.6 Inserts . . . 336
A.7.4.7 Overhead Glazing . . . 336
A.7.4.8 Threaded Rods . . . 336
A.7.5 Masonry Veneer . . . 336
A.7.5.1 Ties . . . 336
A.7.5.2 Shelf Angles . . . 336
A.7.5.3 Weakened Planes . . . 337
A.7.5.4 Weep Holes . . . 337
A.7.6 Metal Stud Backup Systems . . . 337
A.7.6.1 Stud Tracks . . . 337
A.7.6.2 Openings . . . 337
A.7.7 Concrete Block and Masonry Backup Systems . . . 337
A.7.7.1 Anchorage . . . 337
A.7.7.2 Unreinforced Masonry Backup . . . 337
A.7.8 Parapets, Cornices, Ornamentation, and Appendages . . . 337
A.7.8.1 Unreinforced Masonry Parapets or Cornices . . . 337
A.7.8.2 Canopies . . . 337
A.7.8.3 Concrete Parapets . . . 337
A.7.8.4 Appendages . . . 337

A.7.8.5 Penthouses . . . 337
A.7.8.6 Tile Roofs . . . 338
A.7.9 Masonry Chimneys . . . 338
A.7.9.1 Unreinforced Masonry Chimneys . . . 338
A.7.9.2 Anchorage . . . 338
A.7.10 Stairs . . . 338
A.7.10.1 Stair Enclosures . . . 338
A.7.10.2 Stair Details . . . 338
A.7.11 Building Contents and Furnishing . . . 338
A.7.11.1 Industrial Storage Racks . . . 338
A.7.11.2 Tall Narrow Contents . . . 338
A.7.11.3 Fall-Prone Contents . . . 338
A.7.11.4 Access Floors . . . 338
A.7.11.5 Equipment on Access Floors . . . 339
A.7.11.6 Suspended Contents . . . 339
A.7.12 Mechanical and Electrical Equipment . . . 339
A.7.12.1 Emergency Power . . . 339
A.7.12.2 Hazardous Material Equipment . . . 339
A.7.12.3 Equipment Support Deterioration . . . 339
A.7.12.4 Fall-Prone Equipment . . . 339
A.7.12.5 In-Line Equipment . . . 339
A.7.12.6 Tall Narrow Equipment . . . 339
A.7.12.7 Mechanical Doors . . . 339
A.7.12.8 Suspended Equipment . . . 339
A.7.12.9 Vibration Isolators . . . 339
A.7.12.10 Heavy Equipment . . . 339
A.7.12.11 Electrical Equipment . . . 340
A.7.12.12 Conduit Couplings . . . 340
A.7.13 Piping . . . 340
A.7.13.1 Fire Suppression Piping . . . 340
A.7.13.2 Flexible Couplings . . . 340
A.7.13.3 Sprinkler Ceiling Clearance . . . 340
A.7.13.4 Fluid and Gas Piping . . . 340
A.7.13.5 C-Clamps . . . 340
A.7.13.6 Piping Crossing Seismic Joints . . . 340
A.7.14 Ducts . . . 340
A.7.14.1 Stair and Smoke Ducts . . . 340
A.7.14.2 Duct Bracing . . . 340
A.7.14.3 Duct Support . . . 341
A.7.14.4 Ducts Crossing Seismic Joints . . . 341
A.7.15 Hazardous Materials . . . 341
A.7.15.1 Hazardous Material Storage . . . 341
A.7.15.2 Shutoff Valves . . . 341
A.7.15.3 Shutoff Valves . . . 341
A.7.15.4 Flexible Couplings . . . 341
A.7.16 Elevators . . . 341
A.7.16.1 Retainer Guards . . . 341
A.7.16.2 Retainer Plate . . . 341
A.7.16.3 Elevator Equipment . . . 341
A.7.16.4 Seismic Switch . . . 341
A.7.16.5 Shaft Walls . . . 342
A.7.16.6 Counterweight Rails . . . 342
A.7.16.7 Brackets . . . 342
A.7.16.8 Spreader Bracket . . . 342
A.7.16.9 Go-Slow Elevators . . . 342

APPENDIX B APPLYING ASCE 41 IN BUILDING CODES, REGULATORY POLICIES, AND MITIGATION PROGRAMS . . . 343
B.1 Introduction . . . 343
B.2 Mandatory Mitigation . . . 343
B.2.1 Performance Objectives . . . 344
B.2.2 Implementation Issues . . . 345
B.2.3 Historic Buildings . . . 345
B.2.4 Example Programs . . . 345

B.3 Voluntary Mitigation . . . 346
B.3.1 Performance Objectives . . . 346
B.3.2 Implementation Issues . . . 346
B.3.3 Historic Buildings . . . 347
B.3.4 Example Programs . . . 347
B.4 Triggered Mitigation . . . 347
B.4.1 Performance Objectives . . . 347
B.4.2 Implementation Issues . . . 347
B.4.3 Historic Buildings . . . 348
B.4.4 Example Programs . . . 348
Reference . . . 349

APPENDIX C SUMMARY DATA SHEET . . . 351

Commentary to Standard ASCE/SEI 41-23

C1 GENERAL REQUIREMENTS . . . 353
C1.1 Scope . . . 353
C1.3 Seismic Evaluation Process . . . 355
C1.3.1 Assignment of Performance Objective . . . 355
C1.3.3 As-Built Information . . . 356
C1.3.4 Evaluation Procedures . . . 356
C1.4 Seismic Retrofit Process . . . 357
C1.4.1 Assignment of Performance Objective . . . 359
C1.4.4 Verification of Retrofit Design . . . 359
C1.4.5 Quality Assurance and Structural Observation . . . 360
C1.4.5.1 Special Inspections and Testing . . . 360
C1.4.5.2 Structural Observation . . . 360

C2 PERFORMANCE OBJECTIVES AND SEISMIC HAZARDS . . . 361
C2.2 Performance Levels . . . 361
C2.2.1 Structural Performance Levels and Ranges . . . 361
C2.2.2 Nonstructural Performance Levels . . . 367
C2.3 Seismic Hazard . . . 372
C2.3.1 Seismic Hazard . . . 372
C2.3.1.1 BSE-2N Seismic Hazard Level . . . 372
C2.3.1.2 BSE-1N Seismic Hazard Level . . . 372
C2.3.1.3 BSE-2E Seismic Hazard Level . . . 372
C2.3.1.4 BSE-1E Seismic Hazard Level . . . 373
C2.3.1.5 Seismic Hazard Levels for Other Probabilities of Exceedance, Risk Targets, or Deterministic Hazards . . . 373
C2.3.2 General Response Spectrum . . . 373
C2.3.2.1 Multiperiod General Horizontal Response Spectrum . . . 373
C2.3.2.2 Two-Period General Horizontal Response Spectrum . . . 373
C2.3.2.3 General Vertical Response Spectrum . . . 373
C2.3.3 Site-Specific Procedure for Hazards Caused by Ground Shaking . . . 373
C2.3.4 Ground Motion Acceleration Histories . . . 374
C2.4 Performance Objectives . . . 374
C2.4.1 Basic Performance Objective for Existing Buildings (BPOE) . . . 375
C2.4.2 Enhanced Performance Objectives . . . 377
C2.4.3 Limited Performance Objectives . . . 377
C2.4.4 Basic Performance Objective Equivalent to New Building Standards (BPON) . . . 377
C2.4.5 Partial Retrofit . . . 377
C2.4.6 System-Specific Performance Procedures . . . 377
C2.5 Level of Seismicity . . . 378

C3 EVALUATION AND RETROFIT REQUIREMENTS . . . 379
C3.2 As-Built Information . . . 379
C3.2.1 Building Type . . . 379
C3.2.2 Building Configuration . . . 379
C3.2.3 Component Properties . . . 379
C3.2.4 Site and Foundation Information . . . 379

C3.2.5 Adjacent Buildings . . . 379
C3.2.5.1 Building Pounding . . . 379
C3.2.5.2 Shared Element Condition . . . 379
C3.2.5.3 Hazards from Adjacent Buildings . . . 380
C3.3 Common Building Types . . . 380
C3.4 Benchmark Buildings . . . 380
C3.4.1 Benchmark Procedure Checklist . . . 385
C3.4.2.1 Level of Seismicity . . . 386
C3.4.2.2 Seismic Force Provisions . . . 386
C3.5 Evaluation and Retrofit Procedures . . . 387
C3.5.1 Limitations on the Use of Tier 1 and Tier 2 Evaluation and Retrofit Procedures . . . 387
C3.5.1.2 Buildings Composed of More than One of the Common Building Types . . . 387
C3.5.2 Tier 1 Screening Procedure . . . 388
C3.5.3 Tier 2 Deficiency-Based Evaluation and Retrofit Procedures . . . 388
C3.5.3.1 Evaluation Requirements . . . 388
C3.5.3.2 Retrofit Requirements . . . 388
C3.5.4 Tier 3 Systematic Evaluation and Retrofit Procedures . . . 388
C3.5.4.1 Evaluation Requirements . . . 388
C3.5.4.2 Retrofit Requirements . . . 388

C4 TIER 1 SCREENING . . . 389
C4.1 Scope . . . 389
C4.1.1 Performance Level . . . 389
C4.2 Scope of Investigation Required . . . 389
C4.2.1 On-Site Investigation and Condition Assessment . . . 389
C4.2.3 Default Material Values . . . 389
C4.3 Selection and Use of Checklists . . . 389
C4.4 Tier 1 Analysis . . . 389
C4.4.2.1 Pseudo Seismic Force . . . 389
C4.4.2.4 Period . . . 393
C4.4.3.1 Story Drift for Moment Frames . . . 393
C4.4.3.2 Shear Stress in Concrete Frame Columns . . . 393
C4.4.3.5 Precast Connections . . . 393
C4.4.3.6 Column Axial Stress Caused by Overturning . . . 393
C4.4.3.7 Flexible Diaphragm Connection Forces . . . 393
C4.4.3.8 Prestressed Elements . . . 393
C4.4.3.9 Flexural Stress in Columns and Beams of Steel Moment Frames . . . 393

C5 TIER 2 DEFICIENCY-BASED EVALUATION AND RETROFIT . . . 395
C5.1 Scope . . . 395
C5.2 General Requirements . . . 395
C5.2.1 Performance Level and Seismic Hazard Level . . . 395
C5.2.2 As-Built Information . . . 395
C5.2.3 Condition Assessment . . . 395
C5.2.4 Tier 2 Analysis Methods . . . 395
C5.2.5 Tier 2 Acceptance Criteria . . . 396
C5.2.6 Knowledge Factor . . . 396
C5.3 Tier 2 Deficiency-Based Evaluation Requirements . . . 396
C5.4 Procedures for Basic Configuration of Building Systems . . . 396
C5.4.1 General . . . 396
C5.4.1.1 Load Path . . . 396
C5.4.1.2 Adjacent Buildings . . . 396
C5.4.1.3 Mezzanines . . . 396
C5.4.2 Building Configuration . . . 396
C5.4.2.1 Weak Story Irregularity . . . 396
C5.4.2.2 Soft Story Irregularity . . . 396
C5.4.2.3 Vertical Irregularities . . . 397
C5.4.2.4 Geometric Irregularity . . . 397
C5.4.2.5 Mass Irregularity . . . 397
C5.4.2.6 Torsion Irregularity . . . 397
C5.4.3 Geologic Site Hazards and Foundation Components . . . 397
C5.4.3.1 Geologic Site Hazards . . . 397
C5.4.3.3 Overturning . . . 397

C5.5 Procedures for Seismic-Force-Resisting Systems . . . 397
C5.5.1 General . . . 397
C5.5.1.1 Redundancy . . . 397
C5.5.2 Procedures for Moment Frames . . . 397
C5.5.2.1 General Procedures for Moment Frames . . . 397
C5.5.2.2 Procedures for Steel Moment Frames . . . 397
C5.5.2.3 Procedures for Concrete Moment Frames . . . 397
C5.5.3 Procedures for Shear Walls . . . 397
C5.5.3.1 General Procedures for Shear Walls . . . 397
C5.5.3.3 Procedures for Precast Concrete Shear Walls . . . 398
C5.5.4 Procedures for Braced Frames . . . 398
C5.5.4.1 Axial Stress Check . . . 398
C5.7 Procedures for Connections . . . 398
C5.7.4 Interconnection of Elements . . . 398
C5.7.4.4 Beam, Girder, and Truss Supported on Unreinforced Masonry (URM) Walls or URM Pilasters . . . 398
C5.8 Tier 2 Deficiency-Based Retrofit Requirements . . . 398
C5.8.1 Compliance with Deficiency-Based Evaluation . . . 398
C5.8.2 Additional Evaluation of the Resulting Building . . . 398
C5.8.2.1 Building Configuration . . . 398
C5.8.2.2 Increased Gravity Demands to Existing Elements . . . 398
C5.8.2.3 Increased Seismic Demands to Existing Elements . . . 398
C5.8.3 Evaluation of New and Modified Structural Elements and Connections . . . 398
C5.8.4.2 Design and Detailing Requirements . . . 398
C5.8.4.3 Scope of Evaluation Requirements for Existing Components . . . 399

C6 TIER 3 SYSTEMATIC EVALUATION AND RETROFIT . . . 401
C6.2 Data Collection Requirements . . . 401
C6.2.2 Condition Assessment . . . 401
C6.2.3 Material Properties . . . 401
C6.2.3.1 Knowledge Factor for Linear Procedures . . . 401
C6.2.3.2 Property Bounding for Nonlinear Procedures . . . 402
C6.3 Tier 3 Evaluation Requirements . . . 403
C6.4 Tier 3 Retrofit Requirements . . . 403

C7 ANALYSIS PROCEDURES AND ACCEPTANCE CRITERIA . . . 405
C7.1 Scope . . . 405
C7.2 General Analysis Requirements . . . 405
C7.2.2 Effective Seismic Weight . . . 405
C7.2.3 Component Gravity Loads and Load Combinations . . . 405
C7.2.3.1 Dead Load . . . 405
C7.2.3.2 Live Load . . . 405
C7.2.3.3 Snow Load . . . 405
C7.2.4 Mathematical Modeling . . . 405
C7.2.4.1 Basic Assumptions . . . 405
C7.2.4.2 Torsion . . . 406
C7.2.4.3 Primary and Secondary Components . . . 407
C7.2.4.5 Foundation Modeling . . . 408
C7.2.4.6 Damping . . . 408
C7.2.5 Configuration . . . 408
C7.2.6 Multidirectional Seismic Effects . . . 408
C7.2.6.1 Concurrent Seismic Effects . . . 408
C7.2.7 P-Delta Effects . . . 409
C7.2.8 Soil–Structure Interaction . . . 409
C7.2.9 Overturning . . . 409
C7.2.9.1 Overturning Effects for Linear Procedures . . . 409
C7.2.10 Sliding at the Soil–Structure Interface . . . 410
C7.2.10.1 Foundation Interconnection . . . 410
C7.2.11 Diaphragms, Chords, Collectors, and Ties . . . 410
C7.2.12 Continuity . . . 411
C7.2.13 Structural Walls and Their Anchorage . . . 411
C7.2.13.2 Out-of-Plane Strength of Walls . . . 411
C7.2.15 Building Separation . . . 411

C7.2.15.2 Separation Exceptions . . . 411
C7.2.16 Verification of Analysis Assumptions . . . 411
C7.3 Analysis Procedure Selection . . . 411
C7.3.1 Linear Procedures . . . 412
C7.3.1.1 Method to Determine Limitations on Use of Linear Procedures . . . 412
C7.3.1.2 Limitations on Use of the Linear Static Procedure . . . 413
C7.3.2 Nonlinear Procedures . . . 413
C7.3.2.1 Nonlinear Static Procedure . . . 413
C7.3.2.2 Nonlinear Dynamic Procedure . . . 413
C7.4 Analysis Procedures . . . 413
C7.4.1 Linear Static Procedure . . . 413
C7.4.1.1 Basis of the Procedure . . . 413
C7.4.1.2 Period Determination for Linear Static Procedure . . . 413
C7.4.1.3 Determination of Forces and Deformations for Linear Static Procedure . . . 414
C7.4.2 Linear Dynamic Procedure . . . 415
C7.4.2.1 Basis of the Procedure . . . 415
C7.4.2.2 Modeling and Analysis Considerations for Linear Dynamic Procedure . . . 415
C7.4.2.3 Determination of Forces and Deformations for Linear Dynamic Procedure . . . 416
C7.4.3 Nonlinear Static Procedure . . . 416
C7.4.3.1 Basis of the Procedure . . . 416
C7.4.3.2 Modeling and Analysis Considerations for Nonlinear static Procedure . . . 416
C7.4.3.3 Determination of Forces, Displacements, and Deformations for Nonlinear Static Procedure . . . 417
C7.4.4 Nonlinear Dynamic Procedure . . . 419
C7.4.4.1 Basis of the Procedure . . . 419
C7.4.4.3 Determination of Forces and Deformations for Nonlinear Dynamic Procedure 419
C7.4.4.4 Damping for Nonlinear Dynamic Procedure . . . 421
C7.5 Acceptance Criteria . . . 421
C7.5.1 General Requirements . . . 421
C7.5.1.1 Deformation-Controlled and Force-Controlled Actions . . . 422
C7.5.1.2 Critical and Noncritical Actions . . . 423
C7.5.1.3 Expected and Lower-Bound Strengths . . . 423
C7.5.1.4 Material Properties . . . 423
C7.5.2 Linear Procedures . . . 423
C7.5.2.1 Forces and Deformations . . . 423
C7.5.2.2 Acceptance Criteria for Linear Procedures . . . 424
C7.5.3 Nonlinear Procedures . . . 424
C7.5.3.2 Acceptance Criteria for Nonlinear Procedures . . . 424
C7.6 Experimentally Derived Modeling Parameters and Acceptance Criteria . . . 426
C7.6.1 Criteria for General Use Parameters . . . 426
C7.6.2 Criteria for Individual Project Testing . . . 429
C7.6.2.1 Experimental Setup . . . 429
C7.6.2.2 Data Reduction and Reporting . . . 430
C7.6.3 Modeling Parameters and Acceptance Criteria for Nonadaptive Force–Deformation Curves 430
C7.6.4 Modeling Parameters and Acceptance Criteria for Component Actions based on Experimental Data for Fiber Models . . . 432
C7.6.5 Modeling Parameters and Acceptance Criteria for Component Actions based on Experimental Data for Adaptive Force–Deformation Models in the Mathematical Model . . . 432

C8 FOUNDATIONS, SUBSURFACE SOIL, AND GEOLOGIC SITE HAZARDS . . . 433
C8.1 Scope . . . 433
C8.2 Site Characterization . . . 433
C8.2.1 Subsurface Soil and Foundation Information . . . 433
C8.2.1.1 Subsurface Soil Conditions . . . 433
C8.2.1.2 Foundation Conditions . . . 433
C8.2.1.3 Load–Deformation Characteristics of Subsurface Soil Under Seismic Loading 433
C8.2.1.4 Soil Shear Modulus and Poisson's Ratio Parameters . . . 433
C8.2.2 Seismic–Geologic Site Hazards . . . 434
C8.2.2.1 Fault Rupture . . . 434
C8.2.2.2 Liquefaction . . . 434
C8.2.2.3 Settlement of Nonliquefiable Soils . . . 436
C8.2.2.4 Landsliding . . . 436
C8.3 Mitigation of Seismic–Geologic Site Hazards . . . 436
C8.4 Shallow Foundations . . . 437

C8.4.1 Selection of Evaluation Procedures . . . 437
C8.4.2 Expected Soil Bearing Capacities . . . 440
C8.4.2.1 Prescriptive Expected Soil Bearing Capacities . . . 440
C8.4.2.2 Site-Specific Capacities . . . 441
C8.4.3 Simplified Procedure . . . 441
C8.4.4 Fixed-Base Procedure . . . 442
C8.4.4.1 Linear Procedures . . . 443
C8.4.4.2 Nonlinear Procedures . . . 452
C8.4.5 Flexible-Base Procedure . . . 452
C8.4.5.1 Soil Stiffness . . . 452
C8.4.5.2 Linear Procedures . . . 452
C8.4.5.3 Nonlinear Procedures . . . 454
C8.4.6 Shallow Foundation Lateral Load . . . 456
C8.5 Deep Foundations . . . 456
C8.5.1 Pile Foundations . . . 456
C8.5.1.1 Stiffness Parameters . . . 456
C8.5.1.2 Capacity Parameters . . . 456
C8.5.2 Drilled Shafts . . . 456
C8.6 Soil–Structure Interaction Effects . . . 456
C8.6.1 Kinematic Interaction . . . 457
C8.6.1.1 Base Slab Averaging . . . 457
C8.6.1.2 Embedment . . . 457
C8.6.2 Foundation Damping Soil–Structure Interaction Effects . . . 457
C8.6.2.1 Radiation Damping for Rectangular Foundations . . . 457
C8.7 Seismic Earth Pressure . . . 458
C8.8 Foundation Retrofit . . . 459

C9 STEEL AND IRON . . . 461
C9.1 Scope . . . 461
C9.2 Reference Standard for Structural Steel, Composite Steel–Concrete, and Cast and Wrought Iron . . . 461
C9.3 Modification to the Reference Standard for Structural Steel, Composite Steel–Concrete, and Cast and Wrought Iron . . . 461
C9.4 Material Properties and Condition Assessment for Cold-Formed Steel . . . 461
C9.4.1 General . . . 461
C9.4.2.1 Material Properties . . . 462
C9.4.2.2 Component Properties . . . 462
C9.4.2.3 Test Methods to Quantify Mechanical Properties . . . 462
C9.4.2.4 Minimum Number of Tests . . . 462
C9.4.2.5 Default Mechanical Properties . . . 462
C9.4.3 Condition Assessment . . . 462
C9.4.3.1 General . . . 462
C9.4.3.2 Scope and Procedures . . . 463
C9.4.3.3 Basis for the Mathematical Building Model . . . 463
C9.5 General Assumptions and Requirements for Cold-Formed Steel . . . 463
C9.5.1 Stiffness . . . 463
C9.5.1.2 Use of Nonlinear Procedures for Cold-Formed Steel Light-Frame Construction . . . 463
C9.5.2 Strength and Acceptance Criteria . . . 463
C9.5.2.2 Deformation-Controlled Actions . . . 463
C9.5.2.3 Force-Controlled Actions . . . 463
C9.5.3 Connection Requirements in Cold-Formed Steel Light-Frame Construction . . . 464
C9.5.5 Retrofit Measures . . . 464
C9.6 Cold-Formed Steel Light-Frame Construction, Shear Wall Systems . . . 464
C9.6.1 General . . . 464
C9.6.2 Types of Cold-Formed Steel Light-Frame Construction, Shear Wall Systems . . . 464
C9.6.2.1 Existing Cold-Formed Steel Light-Frame Shear Walls . . . 464
C9.6.2.2 Enhanced Cold-Formed Steel Light-Frame Shear Walls . . . 464
C9.6.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Cold-Formed Steel Light-Frame Construction Shear Wall Systems . . . 465
C9.7 Cold-Formed Steel Moment-Frame Systems . . . 465
C9.7.3.1 Generic Cold-Formed Steel Moment Connection . . . 465
C9.7.3.2 Cold-Formed Steel Special Bolted Moment Frame . . . 465
C9.8 Cold-Formed Steel Light-Frame Construction, Strap-Braced Wall Systems . . . 465
C9.8.1 General . . . 465
C9.8.2 Types of Cold-Formed Steel Light-Framed Construction with Strap-Braced Walls . . . 465

C9.8.2.1 Existing Cold-Formed Steel Light-Frame Construction with Strap-Braced Walls 465
C9.8.2.2 Cold-Formed Steel Light-Frame Construction with Enhanced Strap-Braced Walls 465
C9.9 CFS Diaphragms . . . 465

C10 CONCRETE . . . 467
C10.3 Modifications to the Reference Standard . . . 467
C10.3.1 General Assumptions and Requirements . . . 467
C10.3.2 Concrete Structural Walls . . . 471
C10.3.3 Concrete Foundations . . . 480

C11 MASONRY . . . 483
C11.1 Scope . . . 483
C11.2 Condition Assessment and Material Properties . . . 483
C11.2.1 General . . . 483
C11.2.2 Condition Assessment . . . 483
C11.2.2.2 Comprehensive Condition Assessment . . . 484
C11.2.2.3 Supplemental Tests . . . 485
C11.2.2.4 Condition Enhancement . . . 485
C11.2.2.5 Pointing or Repointing of Unreinforced Masonry Walls . . . 485
C11.2.3 Properties of In-Place Materials and Components . . . 485
C11.2.3.3 Masonry Compressive Strength . . . 485
C11.2.3.4 Masonry Elastic Modulus in Compression . . . 486
C11.2.3.5 Masonry Flexural Tensile Strength . . . 486
C11.2.3.6 Unreinforced Masonry Shear Strength . . . 486
C11.2.3.7 Masonry Shear Modulus . . . 486
C11.2.3.8 Steel Reinforcement Yield Strength Properties . . . 486
C11.2.3.9 Minimum Number of Tests . . . 487
C11.2.3.10 Default Properties . . . 487
C11.3 Masonry Walls . . . 487
C11.3.1 Types of Masonry Walls . . . 487
C11.3.1.2 New Masonry Walls . . . 487
C11.3.1.3 Retrofitted Masonry Walls . . . 487
C11.3.2 Unreinforced Masonry Walls and Wall Piers Subject to In-Plane Actions . . . 488
C11.3.2.1 Stiffness of URM Walls and Wall Piers Subject to In-Plane Actions . . . 488
C11.3.2.2 Strength of URM Walls Subject to In-Plane Actions . . . 490
C11.3.2.3 Acceptance Criteria for URM In-Plane Actions . . . 495
C11.3.3.2 Strength of URM Walls Subject to Out-of-Plane Actions . . . 497
C11.3.3.3 Acceptance Criteria for URM Walls Subject to out-of-Plane Actions . . . 497
C11.3.4 Reinforced Masonry Walls and Wall Piers In-Plane Actions . . . 498
C11.3.4.3 Flexure-Governed In-Plane Actions of Reinforced Masonry Walls and Wall Piers . . . 499
C11.3.4.4 Shear-Governed In-Plane Actions of Reinforced Masonry Walls and Wall Piers . . . 499
C11.3.4.6 Acceptance Criteria for In-Plane Actions of Reinforced Masonry Walls and Wall Piers . . . 500
C11.3.5 Reinforced Masonry Wall Out-of-Plane Actions . . . 500
C11.3.5.3 Acceptance Criteria for Reinforced Masonry Wall Out-of-Plane Actions . . . 500
C11.4 Masonry Infills . . . 500
C11.4.1 Types of Masonry Infills . . . 500
C11.4.1.1 Existing Masonry Infills . . . 500
C11.4.1.3 Retrofitted Masonry Infills . . . 500
C11.4.2 Masonry Infill In-Plane Actions . . . 500
C11.4.2.1 Stiffness: Masonry Infill In-Plane Actions . . . 500
C11.4.2.2 Stiffness: Masonry Infill with Openings In-Plane Actions . . . 500
C11.4.2.3 Strength: Infilled Reinforced Concrete Frames in-Plane Actions . . . 501
C11.4.2.4 Strength: Infilled Steel Frames In-Plane Actions . . . 502
C11.4.2.5 Drift: Infill Wall In-Plane Actions . . . 502
C11.4.2.6 Strut Model for Infill In-Plane Actions . . . 502
C11.4.2.7 Acceptance Criteria for Infill Wall In-Plane Actions . . . 502
C11.4.3 Masonry Infill Wall Out-of-Plane Actions . . . 502
C11.4.3.1 Stiffness: Infill Wall Out-of-Plane Actions . . . 502
C11.4.3.2 Strength: Infill Wall Out-of-Plane Actions . . . 502
C11.4.3.3 Strength: Infill Wall In-Plane and Out-of-Plane Interaction . . . 502

C11.5 Anchorage to Masonry Walls . . . 503
C11.5.2 Analysis of Anchors . . . 503
C11.5.3 Quality Assurance for Anchors in Masonry Walls . . . 503
C11.6 Masonry Foundation Elements . . . 503
C11.6.1 Types of Masonry Foundations . . . 503
C11.6.3 Foundation Retrofit Measures . . . 503
C11.7 Masonry Diaphragms . . . 503
C11.7.1 General . . . 503
C11.7.2 Seismic Evaluation of Masonry Diaphragms . . . 503
C11.7.3 Retrofit Measures for Masonry Diaphragms . . . 504

C12 WOOD . . . 505
C12.1 Scope . . . 505
C12.2 Material Properties and Condition Assessment . . . 505
C12.2.1 General . . . 505
C12.2.2.2 Component Properties . . . 506
C12.2.2.3 Test Methods to Quantify Material Properties . . . 506
C12.2.2.4 Minimum Number of Tests . . . 506
C12.2.2.5 Default Properties . . . 507
C12.2.3 Condition Assessment . . . 507
C12.2.3.1 General . . . 507
C12.2.3.2 Scope and Procedures for Condition Assessment . . . 507
C12.2.3.3 Basis for the Mathematical Building Model . . . 507
C12.3 General Assumptions and Requirements . . . 508
C12.3.2.2 Deformation-Controlled Actions . . . 508
C12.3.2.3 Force-Controlled Actions . . . 508
C12.3.3 Connection Requirements . . . 508
C12.3.5 Retrofit Measures . . . 508
C12.4 Wood Shear Walls . . . 508
C12.4.1 General . . . 508
C12.4.2 Types of Wood Shear Walls . . . 509
C12.4.2.1 Existing Wood Shear Walls . . . 509
C12.4.2.2 Enhanced Wood Shear Walls . . . 509
C12.4.2.3 New Wood Shear Walls . . . 510
C12.4.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Wood Shear Walls . . . 510
C12.4.3.1 Single-Layer Horizontal Lumber Sheathing or Siding Shear Walls . . . 510
C12.4.3.2 Diagonal Lumber Sheathing Shear Walls . . . 510
C12.4.3.3 Vertical Wood Siding Shear Walls . . . 510
C12.4.3.4 Wood Siding Over Horizontal Lumber Sheathing Shear Walls . . . 510
C12.4.3.5 Wood Siding Over Diagonal Lumber Sheathing Shear Walls . . . 511
C12.4.3.6 Wood Structural Panel Sheathing or Siding Shear Walls . . . 511
C12.4.3.7 Stucco on Studs, Sheathing, or Fiberboard Shear Walls . . . 511
C12.4.3.8 Gypsum Plaster on Wood Lath Shear Walls . . . 511
C12.4.3.9 Gypsum Plaster on Gypsum Lath Shear Walls . . . 511
C12.4.3.10 Gypsum Wallboard Shear Walls . . . 511
C12.4.3.11 Gypsum Sheathing Shear Walls . . . 511
C12.4.3.12 Plaster on Metal Lath Shear Walls . . . 512
C12.4.3.13 Horizontal Lumber Sheathing with Cut-In Braces or Diagonal Blocking Shear Walls . . . 512
C12.4.3.14 Fiberboard or Particleboard Sheathing Shear Walls . . . 512
C12.5 Wood Diaphragms . . . 512
C12.5.1 General . . . 512
C12.5.2 Types of Wood Diaphragms . . . 512
C12.5.2.1 Existing Wood Diaphragms . . . 512
C12.5.2.2 Enhanced Wood Diaphragms . . . 513
C12.5.2.3 New Wood Diaphragms . . . 513
C12.5.3 Stiffness, Strength, Acceptance Criteria, and Connection Design for Wood Diaphragms . . . 514
C12.5.3.1 Single-Layer Straight Lumber Sheathing Diaphragms . . . 514
C12.5.3.2 Double-Layer Straight Lumber Sheathing Diaphragms . . . 514
C12.5.3.3 Single-Layer Diagonal Lumber Sheathing Diaphragms . . . 514
C12.5.3.4 Diagonal Lumber Sheathing with Straight Lumber Sheathing or Flooring above Diaphragms . . . 514
C12.5.3.5 Double-Layer Diagonal Lumber Sheathing Diaphragms . . . 514
C12.5.3.6 Wood Structural Panel Sheathing Diaphragm . . . 515

C12.5.3.7 Wood Structural Panel Overlays on Straight or Diagonal Lumber Sheathing Diaphragms. . . . 515
C12.5.3.8 Wood Structural Panel Overlays on Existing Wood Structural Panel Sheathing Diaphragms. . . . 515
C12.6 Wood Foundations . . . 515
C12.6.1 Types of Wood Foundations. . . . 515
C12.6.2 Analysis, Strength, and Acceptance Criteria for Wood Foundations . . . 516
C12.6.3 Retrofit Measures for Wood Foundations . . . 516
C12.7 Other Wood Elements and Components. . . . 516
C12.7.1 General . . . 516
C12.7.1.2 Strength of Other Wood Elements and Components . . . 516
C12.7.1.3 Acceptance Criteria for Other Wood Elements and Components. . . . 516

C13 ARCHITECTURAL, MECHANICAL, AND ELECTRICAL COMPONENTS . . . 517
C13.1 Scope . . . 517
C13.2 Evaluation and Retrofit Procedure for Nonstructural Components . . . 517
C13.2.1 Classification of Components . . . 517
C13.3 Component Assessment and Anchorage Testing . . . 517
C13.3.1 Condition Assessment . . . 518
C13.3.2 Testing Requirements for Evaluating the Performance of Existing Attachments for Nonstructural Components. . . . 518
C13.3.2.1 Components Evaluated to the Operational Performance Level . . . 518
C13.3.2.2 Components Evaluated to the Position Retention or Life Safety Performance Level . . . 518
C13.3.2.3 Tension Testing Procedure. . . . 518
C13.3.2.5 Alternate Test Criteria . . . 518
C13.4 Evaluation Procedures . . . 518
C13.4.2 Analytical Procedure. . . . 518
C13.4.3 Prescriptive Procedure . . . 518
C13.4.4.1 Horizontal Seismic Forces . . . 519
C13.4.4.3 Load Combination . . . 519
C13.4.4.4 Nonstructural Support Capacity . . . 519
C13.4.5 Deformation Analysis . . . 519
C13.5 Retrofit Approaches . . . 519
C13.6 Architectural Components: Definition, Behavior, and Acceptance Criteria. . . . 520
C13.6.1 Exterior Wall Components. . . . 520
C13.6.1.1 Adhered Veneer . . . 520
C13.6.1.2 Anchored Veneer. . . . 520
C13.6.1.3 Glass Block Units and Other Nonstructural Masonry. . . . 521
C13.6.1.4 Prefabricated Panels . . . 521
C13.6.1.5 Glazed Exterior Wall Systems. . . . 521
C13.6.2 Partitions . . . 522
C13.6.2.1 Definition and Scope. . . . 522
C13.6.2.2 Component Behavior and Retrofit Methods. . . . 522
C13.6.2.4 Evaluation Requirements. . . . 522
C13.6.3 Interior Veneers . . . 522
C13.6.3.2 Component Behavior and Retrofit Methods. . . . 522
C13.6.4 Ceilings. . . . 522
C13.6.4.1 Definition and Scope. . . . 522
C13.6.4.2 Component Behavior and Retrofit Methods. . . . 522
C13.6.5 Parapets and Cornices . . . 522
C13.6.5.1 Definition and Scope. . . . 522
C13.6.5.2 Component Behavior and Retrofit Methods. . . . 522
C13.6.6 Architectural Appendages and Marquees . . . 522
C13.6.6.1 Definition and Scope. . . . 522
C13.6.6.2 Component Behavior and Retrofit Methods. . . . 522
C13.6.9 Chimneys and Stacks . . . 523
C13.6.9.2 Component Behavior and Retrofit Methods. . . . 523
C13.6.10 Stairs and Ramps. . . . 523
C13.6.10.1 Definition and Scope. . . . 523
C13.6.10.2 Component Behavior and Retrofit Methods. . . . 523
C13.6.11 Doors Required for Emergency Services Egress in Essential Facilities . . . 523
C13.6.11.1 Definition and Scope. . . . 523
C13.6.12 Computer Access Floors. . . . 523

C13.6.12.1 Definition and Scope . . . 523
C13.6.12.2 Component Behavior and Retrofit Methods . . . 523
C13.6.12.4 Evaluation Requirements . . . 523
C13.7 Mechanical, Electrical, and Plumbing Components: Definition, Behavior, and Acceptance Criteria . . . 523
C13.7.1 Mechanical Equipment . . . 523
C13.7.1.1 Definition and Scope . . . 523
C13.7.1.2 Component Behavior and Retrofit Methods . . . 523
C13.7.1.4 Evaluation Requirements . . . 524
C13.7.2 Storage Vessels and Water Heaters . . . 524
C13.7.2.1 Definition and Scope . . . 524
C13.7.2.2 Component Behavior and Retrofit Methods . . . 524
C13.7.2.4 Evaluation Requirements . . . 524
C13.7.3 Pressure Piping . . . 524
C13.7.3.2 Component Behavior and Retrofit Methods . . . 524
C13.7.3.4 Evaluation Requirements . . . 524
C13.7.4 Fire Suppression Piping . . . 524
C13.7.4.2 Component Behavior and Retrofit Methods . . . 524
C13.7.4.3 Acceptance Criteria . . . 524
C13.7.4.4 Evaluation Requirements . . . 524
C13.7.5 Fluid Piping Other than Fire Suppression . . . 524
C13.7.5.1 Definition and Scope . . . 524
C13.7.5.2 Component Behavior and Retrofit Methods . . . 524
C13.7.5.4 Evaluation Requirements . . . 524
C13.7.6 Ductwork . . . 525
C13.7.6.2 Component Behavior and Retrofit Methods . . . 525
C13.7.7 Electrical and Communications Equipment . . . 525
C13.7.7.2 Component Behavior and Retrofit Methods . . . 525
C13.7.7.4 Evaluation Requirements . . . 525
C13.7.8 Electrical and Communications Distribution Components . . . 525
C13.7.8.2 Component Behavior and Retrofit Methods . . . 525
C13.7.9 Light Fixtures . . . 525
C13.7.9.2 Component Behavior and Retrofit Methods . . . 525
C13.7.10 Rooftop Solar Photovoltaic Arrays . . . 525
C13.7.10.1 Definition and Scope . . . 525
C13.7.10.2 Component Behavior and Retrofit Methods . . . 525
C13.7.10.4 Evaluation Requirements . . . 525
C13.7.11 Elevators . . . 525
C13.7.11.2 Component Behavior and Retrofit Methods . . . 525
C13.7.11.4 Evaluation Requirements . . . 525
C13.7.12 Conveyors . . . 525
C13.7.12.2 Component Behavior and Retrofit Methods . . . 525
C13.8 Furnishings and Contents: Definition, Behavior, and Acceptance Criteria . . . 525
C13.8.1 Steel Storage Racks . . . 525
C13.8.1.1 Definition and Scope . . . 525
C13.8.1.2 Component Behavior and Retrofit Methods . . . 526
C13.8.2 Contents . . . 526
C13.8.2.1 Definition and Scope . . . 526
C13.8.2.2 Component Behavior and Retrofit Methods . . . 526
C13.8.3 Hazardous Material Storage . . . 526
C13.8.3.2 Component Behavior and Retrofit Methods . . . 526
C13.8.4 Computer and Communication Racks . . . 526
C13.8.4.1 Definition and Scope . . . 526
C13.8.4.2 Component Behavior and Retrofit Methods . . . 526

C14 SEISMIC ISOLATION . . . 527
C14.1 Scope . . . 527
C14.2 General Requirements . . . 527
C14.2.2 Seismic Hazard . . . 527
C14.2.2.1 Ground Motion Acceleration Histories . . . 527
C14.2.3 Isolation System . . . 527
C14.2.3.1 Environmental Conditions . . . 527
C14.2.3.2 Wind Displacement . . . 527
C14.2.3.3 Fire Resistance . . . 527
C14.2.3.4 Lateral Restoring Force . . . 527

C14.2.3.5 Displacement Restraint . . . 527
C14.2.3.6 Vertical Load Stability . . . 527
C14.2.3.7 Overturning . . . 527
C14.2.3.8 Inspection and Replacement . . . 528
C14.2.4 Structural System . . . 528
C14.2.4.2 Minimum Separations . . . 528
C14.2.5 Elements of Structures and Nonstructural Components . . . 528
C14.2.5.2 Components at or above the Isolation Interface . . . 528
C14.2.5.3 Components Crossing the Isolation Interface . . . 528
C14.2.6 Seismic Load Effects and Load Combinations . . . 528
C14.3 Seismic Isolation System Device Properties . . . 529
C14.3.1 Isolation System Device Types . . . 529
C14.3.2 Nominal Design Properties of Isolation System Devices . . . 529
C14.3.3 Bounding Properties of Isolation System Devices . . . 529
C14.3.3.1 Specification Tolerance on Design Properties . . . 529
C14.3.3.2 Testing Variations on Design Properties . . . 529
C14.3.3.3 Aging and Environmental Effects on Design Properties . . . 530
C14.3.4 Property Modification Factors . . . 530
C14.3.5 Upper- and Lower-Bound Properties . . . 530
C14.4 Modeling . . . 530
C14.4.1 Isolation System Device Modeling . . . 530
C14.4.2 Isolation System and Superstructure Modeling . . . 531
C14.4.2.3 Superstructure Model . . . 531
C14.5 Analysis Procedures . . . 531
C14.5.1 Selection of Analysis Procedure . . . 531
C14.5.1.1 Linear Static Procedure . . . 531
C14.5.2 Linear Static Procedure . . . 531
C14.5.2.2 Minimum Lateral Displacements . . . 531
C14.5.2.3 Minimum Lateral Forces . . . 532
C14.5.2.4 Vertical Distribution of Force . . . 532
C14.5.5 Nonlinear Dynamic Procedure . . . 533
C14.5.5.2 Accidental Mass Eccentricity . . . 533
C14.6 Isolation System Testing and Design Properties . . . 533
C14.6.3 Prototype Tests . . . 533
C14.6.3.5 Dynamic Testing . . . 533
C14.6.3.9 Testing Similar Isolation System Devices . . . 533
C14.6.4 Production Testing . . . 533
C14.6.5 Determination of Force–Deflection Characteristics . . . 534
C14.6.6 Test Specimen Adequacy . . . 534
C14.7 Design Review . . . 534

C15 DESIGN REQUIREMENTS FOR STRUCTURES WITH SUPPLEMENTAL ENERGY DISSIPATION . . . 535
C15.1 Scope . . . 535
C15.2 General Design Requirements . . . 535
C15.2.2.1 Ground Motion Acceleration Histories . . . 535
C15.2.3 Damping Device Requirements . . . 535
C15.2.3.1 Device Classification . . . 535
C15.2.3.4 Performance Objectives and System Redundancy . . . 536
C15.3 Properties of Energy Dissipation Devices . . . 537
C15.3.1 Nominal Design Properties . . . 537
C15.3.2 Maximum and Minimum Damper Properties . . . 537
C15.4 Analysis Procedure Selection . . . 537
C15.4.1 General Limitations for the Linear Analysis Procedures . . . 537
C15.5 Nonlinear Dynamic Procedures . . . 537
C15.5.1 General Requirements . . . 537
C15.5.2.2 Velocity-Dependent Devices . . . 537
C15.5.2.3 Other Types of Devices . . . 537
C15.5.3 Accidental Eccentricity . . . 537
C15.7 Design Review . . . 538
C15.8 Required Tests of Energy Dissipation Devices . . . 538
C15.8.2 Production Tests . . . 538
C15.10 Nonlinear Static Procedure . . . 538
C15.10.2 Velocity-Dependent Devices . . . 538

C16 SYSTEM-SPECIFIC PERFORMANCE PROCEDURES . . . 539
C16.1 Scope . . . 539
C16.2 Special Procedure for Unreinforced Masonry . . . 539
C16.2.1 Scope . . . 539
C16.2.2 Condition of Existing Materials . . . 540
C16.2.2.2 Testing . . . 540
C16.2.2.3 Masonry Strength . . . 540
C16.2.3 Analysis . . . 541
C16.2.3.2 Diaphragms . . . 541
C16.2.3.5 New Vertical Elements . . . 541
C16.2.4 Other Components and Systems of URM Buildings . . . 542
C16.2.4.2 Out-of-Plane Demands . . . 542
C16.2.4.3 Wall Anchorage . . . 542
C16.2.5 Detailing for New Elements . . . 542

C17 TIER 1 CHECKLISTS . . . 545
C17.1 Basic Checklists . . . 545
C17.1.1 Very Low Seismicity Checklist . . . 545
C17.1.2 Basic Configuration Checklist . . . 545
C17.2 Structural Checklists for Building Types W1: Wood Light Frames, Small Residential . . . 545
C17.3 Structural Checklists for Building Type W2: Wood Frames, Large Residential, Commercial, Industrial, and Institutional . . . 545
C17.4 Structural Checklists for Building Types S1: Steel Moment Frames with Stiff Diaphragms, and S1A: Steel Moment Frames with Flexible Diaphragms . . . 545
C17.5 Structural Checklists for Building Types S2: Steel Braced Frames with Stiff Diaphragms, and S2A: Steel Braced Frames with Flexible Diaphragms . . . 545
C17.6 Structural Checklists for Building Type S3: Metal Building Frames . . . 545
C17.7 Structural Checklists for Building Type S4: Dual Systems with Backup Steel Moment Frames and Stiff Diaphragms . . . 545
C17.8 Structural Checklists for Building Types S5: Steel Frames with Infill Masonry Shear Walls and Stiff Diaphragms, and S5A: Steel Frames with Infill Masonry Shear Walls and Flexible Diaphragms . . . 545
C17.9 Structural Checklists for Building Type CFS1: Cold-Formed Steel Light-Frame Bearing Wall Construction, Shear Wall Lateral System . . . 545
C17.10 Structural Checklists for Building Type CFS2: Cold-Formed Steel Light-Frame Bearing Wall Construction, Strap-Braced Lateral Wall System . . . 546
C17.11 Structural Checklists for Building Type C1: Concrete Moment Frames . . . 546
C17.12 Structural Checklists for Building Types C2: Concrete Shear Walls with Stiff Diaphragms, and C2A: Concrete Shear Walls with Flexible Diaphragms . . . 546
C17.13 Structural Checklists for Building Types C3: Concrete Frames with Infill Masonry Shear Walls, and C3A: Concrete Frames with Infill Masonry Shear Walls and Flexible Diaphragms . . . 546
C17.14 Structural Checklists for Building Types PC1: Precast or Tilt-up Concrete Shear Walls with Flexible Diaphragms, and PC1A: Precast or Tilt-up Concrete Shear Walls with Stiff Diaphragms . . . 546
C17.15 Structural Checklists for Building Type PC2: Precast Concrete Frames with Shear Walls . . . 546
C17.16 Structural Checklists for Building Type PC2A: Precast Concrete Frames without Shear Walls . . . 546
C17.17 Structural Checklists for Building Types RM1: Reinforced Masonry Bearing Walls with Flexible Diaphragms, and RM2: Reinforced Masonry Bearing Walls with Stiff Diaphragms . . . 546
C17.18 Structural Checklists for Building Types URM: Unreinforced Masonry Bearing Walls with Flexible Diaphragms, and URMA: Unreinforced Masonry Bearing Walls with Stiff Diaphragms . . . 546
C17.19 Nonstructural Checklist . . . 546

C18 REFERENCES . . . 547

INDEX . . . 561

PREFACE

This 2023 edition of ASCE/SEI 41 *Seismic Evaluation and Retrofit of Existing Buildings* is a revision to the 2017 edition. A summary of the most significant changes that are in the ASCE/SEI 41-23 standard includes the following:

Chapter 1

- Revised the chapter to move significant material to commentary
- Changed the quality assurance, testing, and structural observation provisions to align with the *International Building Code*

Chapter 2

- Reorganized the chapter sections to place performance levels and Seismic Hazard Levels before Performance Objectives
- Adopted the 2018 USGS seismic hazard model and multi-period spectra
- Pointed to ASCE 7-22 for seismic hazard information, including new site class designations

Chapter 3

- Revised the Common Building Type definitions for wood-framed buildings
- Added criteria related to changes in Seismic Hazard Level for Benchmark Buildings
- Revised the Benchmark Building code editions
- Added Benchmark Building criteria for Risk Category III structures

Chapter 4

- Changed several of the Tier 1 Quick Check procedures

Chapter 5

- Aligned the Tier 2 Knowledge Factor with the Tier 3 requirements
- Updated the Tier 2 evaluation requirements for Steel Deck diaphragms
- Updated the Tier 2 Deficiency-Based Retrofit requirements to include retrofit-specific requirements on the resulting structure, design and detailing requirements, and definition of the scope of evaluation requirements for existing components

Chapter 6

- Revised the condition assessment and data collection requirements
- Eliminated the dependence of performance level for data collection and material testing
- Granted permission to use material property bounding in a nonlinear analysis in lieu of material testing

Chapter 7

- Aligned the dead and live load specifications with those of ASCE 7
- Aligned the snow load specifications with the new risk-targeted snow loads of ASCE 7
- Updated the viscous damping specifications
- Clarified that diaphragm ties, interconnection, wall out-of-plane anchorage, and wall out-of-plane demands are force-controlled actions
- Updated diaphragm specifications to better account for force transfer between offset vertical elements, to eliminate the linear static floor on linear dynamic forces, to allow diaphragm forces to be taken directly from a linear dynamic model or nonlinear static model, and to allow limited deformation-controlled acceptance for components modeled as linear elements in nonlinear static or dynamic analysis
- Revised the limitations for linear analysis to categorically allow linear analysis for certain simple model building types and to allow linear analysis for in-plane and out-of-plane discontinuities if the elements are treated as force-controlled
- Revised the linear lateral force specifications to be based on the new multi-period response spectra of ASCE 7
- Eliminated the J factor and added a minimum demand/capacity-based alternate for force-controlled actions
- Created specifications for modeling and acceptance of fiber elements
- Clarified the definitions of critical and noncritical elements
- Defined the valid range of modeling for unacceptable response
- Added a transient response limitation for unacceptable response
- Separated project-specific testing from general testing specifications
- Created specifications for the development of modeling parameters and acceptance criteria based on large data sets for general use
- Eliminated the use of monotonic testing except in the case of calibration of adaptive hinges
- Revised the specifications to explicitly set the Damage Control point on the generalized force-displacement curve
- Expanded the force-displacement curve beyond the Collapse Prevention point to the point of loss of vertical load-carrying capacity
- Revised the specifications to eliminate local acceptance criteria for Collapse Prevention of noncritical elements
- Added new requirements to check sliding at the soil-structure interface

Chapter 8

- Restructured the chapter to have a more logical flow when navigating the chapter based on the building foundation type, shallow or deep
- For buildings on shallow foundations, added a new section to select the appropriate analysis procedure for foundation evaluation based on foundation and superstructure characteristics prior to performing the analysis
- Added a simplified procedure for rapid evaluation of the foundation when certain conditions are met by idealizing the foundation into individual foundation segments
- Eliminated analysis procedures for shallow foundations using Methods 1-2 and 3, and foundation can be modeled as fixed base or a flexible base using linear or nonlinear analysis procedures
- Added a new section for selection of the analysis procedure
- Removed the requirement for building analysis using upper and lower bound soil properties
- Defined a new term to represent the soil short-term soil bearing capacity which is equivalent to the upper bound

soil bearing capacity value permitted to be used for foundations modeled as a fixed base or flexible base
- Determined foundation acceptance based on foundation action, either overturning axial load action, or overturning moment and axial load actions on the foundation
- Added different criteria when evaluating the foundation depending if the building is on isolated spread footings, combined footings, or mat foundations
- Added alternate provisions to determine the minimum foundation width to be used to calculate the soil stiffness for buildings on Mat foundations
- Expanded the foundation overturning moment capacity acceptance to include bidirectional moments on the footing
- For linear analysis where soil springs resist both tension and compression, spring stiffness values are half the expected stiffness of the soil which is the previous lower bound soil stiffness value
- Updated the requirements for seismic increment of earth pressure on retaining walls, which need to be considered only for performance objects higher than life safety

Chapter 9

- Chapter 9 now references AISC 342 for the modeling parameters and acceptance criteria for structural steel, composite steel-concrete, and cast and wrought iron components
- AISC 342 revises the default material strengths for various steels
- AISC 342 revises the material testing requirements for welded components
- AISC 342 revises the modeling parameters and acceptance criteria for steel columns
- AISC 342 revises the modeling parameters and acceptance criteria for beam–column connection panel zones
- AISC 342 revises the modeling parameters and acceptance criteria for pre-Northridge WUF-B beam–column connections
- AISC 342 revises the modeling parameters and acceptance criteria for welded bottom haunch with slab to include minimum requirements for the composite slab
- AISC 342 revises the modeling parameters and acceptance criteria for AISC 341 conforming beam–column connections
- AISC 342 revises the modeling parameters and acceptance criteria for steel braces in both tension and compression, with a particular impact on braces with thin walls
- AISC 342 adds explicit requirements to evaluate partial penetration welded column splices
- AISC 342 changes the designation of untopped steel deck diaphragms from force-controlled to deformation controlled and provides modeling parameters and acceptance criteria for them
- AISC 342 provides modeling parameters and acceptance criteria for concrete-filled steel deck diaphragms
- AISC 342 updates requirements for cast and wrought iron columns

Chapter 10

- 9 now references ACI 369.1 for the modeling parameters and acceptance criteria for structural steel, composite steel-concrete, and cast and wrought iron components
- ACI 369.1 revises the means to classify structural walls as shear or flexure controlled
- ACI 369.1 revises the modeling parameters and acceptance criteria for flexure controlled structural walls
- The standard modifies ACI 369.1 to revise the modeling parameters and acceptance criteria for structural walls governed by shear or shear friction at the base of the wall
- The standard modified ACI 369.1 to permit deformation-controlled actions in foundation components using modeling parameters and acceptance criteria for similar superstructure components

Chapter 11

- Revised the diagonal tension strength calculation for URM spandrels
- Clarified requirements for Comprehensive Testing of masonry
- Revised and expanded the provisions for anchorage to masonry walls
- Permitted the use of force redistribution in URM deformation-controlled lines of resistance
- Revised the linear *m*-factors for URM walls to permit evaluation of axial load ratios between 4% and 8%
- Revised the Collapse Prevention, Damage Control, and Limited Safety acceptance criteria for URM walls subject to out-of-plane actions to be consistent with the Life Safety procedure; a similar revision was also made to the Chapter 16 provisions for out-of-plane evaluation
- Completely rewritten provisions for Reinforced Masonry Walls and Wall Piers subject to in-plane actions
- Added provisions to allow the evaluation of nonconforming lap splices in Reinforced Masonry
- Added provisions for evaluation of masonry diaphragms

Chapter 12

- Revised Table 12.2-2 for single straight sheathed lumber diaphragms to clarify applicability of default properties whether the diaphragm is chorded or unchorded and accompanied by addition of a simplified diaphragm deflection equation
- Updated reference standards, including ASTM D245, ASTM D5457, US DOC PS 1, US DOC PS2, AWC National Design Specification (NDS) for Wood Construction, and AWC Special Design Provisions for Wind and Seismic (SDPWS)
- Updated criteria for determination of expected strength from SDPWS tabulated nominal strengths for shear walls and diaphragms to coordinate with reference to the 2021 Special Design Provisions for Wind and Seismic (SDPWS)
- Retitled Chapter 12 to "Wood" to reflect broad applicability of requirements beyond wood Light-frame construction; implemented consistent terminology for lumber sheathed systems throughout Chapter 12
- Revised Section 12.3.3.1 to clarify that demands on wood elements as well as bodies of metal connections are considered force-controlled actions

Chapter 13

- Reorganized the chapter to provide a more logical description of the process
- Revised Table 13-1 to eliminate the column for evaluation procedure and added section references
- Moved evaluation criteria from footnotes to Table 13-1 into the scope and acceptance criteria for the components
- Added tables of coefficients for calculation of seismic forces from ASCE 7-16
- Added a new section to clarify the requirements for determining capacity of new and existing nonstructural components
- Added a new procedure for evaluating overturning resistance for unanchored equipment

- Added criteria for evaluation of penthouses and clay tile roofs
- Clarified the requirements for evaluation of mechanical and electrical distribution systems
- Added a procedure for evaluation of multilevel steel storage racks

Chapter 14

- Revised the number of ground motions required and period range of interest for seismically isolated buildings that use the nonlinear dynamic procedure
- Editorially rewrote much of Chapter 14 for seismically isolated buildings for alignment with ASCE 7 Chapter 17
- Revised prototype test specimen adequacy/acceptance criteria for seismically isolated buildings

Chapter 15

- Revised the number of ground motions required and period range of interest for buildings with supplemental energy dissipation that use the nonlinear dynamic procedure
- Revised the criteria for deformation-controlled actions for buildings with supplemental energy dissipation which use the linear analysis procedures

Chapter 16

- Clarified and revised the requirements for New Vertical Elements in URM buildings using Chapter 16
- Added minimum requirements for the transfer of URM wall anchorage forces into diaphragms using Chapter 16

Chapter 17

- Revised and added to the Tier 1 structural checklist statements related to diaphragms
- Revised the Tier 1 structural checklist statements related to foundations and overturning
- Added Tier 1 nonstructural checklist statements for penthouses and tile roofs

ACKNOWLEDGMENTS

ASCE/SEI 41-23 Seismic Evaluation and Retrofit of Existing Buildings

Voting Members
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE, *Chair*
Peter W. Somers, P.E., S.E., M.ASCE, *Vice Chair*
Russell A. Berkowitz, P.E., S.E., M.ASCE
David Bonowitz, S.E.
Michael Thomas Braund Jr., P.E., S.E., M.ASCE
Scott Campbell, Ph.D., P.E., M.ASCE
Jeff J. Dragovich, Ph.D., P.E., M.ASCE
Wassim M. Ghannoum, Ph.D., P.E., F.SEI, M.ASCE
Satyendra K. Ghosh, Ph.D., F.SEI, F.ASCE
Nathaniel P. Gonner, S.E., M.ASCE
Ronald O. Hamburger, P.E.,S.E.,F.SEI
John L. Harris, Ph.D., P.E., S.E., F.SEI, M.ASCE
Brian Edward Kehoe, P.E., S.E., F.SEI, F.ASCE
Philip Line, P.E., M.ASCE
Roy F. Lobo, Ph.D., S.E., M.ASCE
Terry R. Lundeen, P.E.,S.E., M.ASCE
Bonnie E. Manley, P.E., F.SEI, M.ASCE
Matthew C. McBride, S.E., M.ASCE
James McDonald, P.E., S.E., Aff.M.ASCE
Mark A. Moore, S.E., M.ASCE
James C. Parker, P.E., S.E., M.ASCE
Owen Arthur Rosenboom, Ph.D., P.E., S.E., M.ASCE
Brandt W. Saxey, P.E., S.E., M.ASCE
Marko IJke Schotanus, Ph.D., P.E., S.E., M.ASCE
John F. Silva, P.E., S.E., F.SEI, M.ASCE
John M. Tehaney, P.E., S.E., M.ASCE
Eugene L. Trahern, P.E., S.E., M.ASCE
William Tremayne, P.E., S.E.
Frederick Michael Turner, P.E., S.E., M.ASCE
Ryan Turner, P.E., S.E.
Reid B. Zimmerman, P.E., S.E., M.ASCE

Associate Members
David Mark Martin, S.E., A.M.ASCE, *Secretary*
Ian Aiken, Ph.D., P.E., M.ASCE
Shahen Akelyan, P.E., S.E.
Juan Aleman, Ph.D., P.E.
Abdalsattar Alfarra, M.ASCE
Mohammad AlHamaydeh, Ph.D., P.E., F.SEI, M.ASCE
Mohammad Aliaari, Ph.D., P.E., S.E.
Christina Aronson, P.E., S.E., M.ASCE
Alireza Asgari, Ph.D., S.E.
Ari Peter Baranian, P.E., M.ASCE
Daniel Terence Tasman Bech, P.E., S.E., M.ASCE
Randall P. Bernhardt, P.E., F.SEI, F.ASCE
David T. Biggs, P.E., S.E., F.SEI, Dist.M.ASCE
William B. Black, P.E., M.ASCE
Katie Boisseree,
Matthew E. Bowers, P.E., M.ASCE
Michael Brekken, P.E.
Sergio Francisco Breña, Ph.D., M.ASCE
Wayne Brown, P.E., S.E.
Francisco Chitty, Ph.D.
Carlo Citto, P.E., M.ASCE
Richard Patrick Clarke, Ph.D., M.ASCE
Rebecca Hix Collins, P.E., S.E., M.ASCE
Paul P. Cordova, Ph.D., P.E., S.E.
William Sandy Cumming, P.E.
Maikol Del Carpio Ramos, Ph.D., P.E., Aff.M.ASCE
Hossein Derakhshan,
Nancy H. Devine, P.E., S.E.
William R. Earl, P.E., S.E., M.ASCE
Kenneth John Elwood, Ph.D.
Konrad Brian Eriksen,
Farrokh Fazileh, Ph.D., P.Eng, M.ASCE
Omar Leonel Garza, P.E., S.E., M.ASCE
Daniel Gaspar Rodriguez, P.E.
Babak Gerami, P.E., S.E., M.ASCE
Amir S. J. Gilani, Ph.D., S.E., M.ASCE
Ivan Giongo, Ph.D., P.E., S.E.
Max A. Gregersen, P.E., S.E., M.ASCE
Selim Gunay, Ph.D.
Mahmoud Mhd Hachem, Ph.D., P.E., M.ASCE
Garrett Richard Hagen, P.E., M.ASCE
Arne Halterman, P.E., S.E.
Andrew Herseth, P.E., S.E., M.ASCE
John Hinchcliffe, P.E., M.ASCE
Darrick B. Hom, P.E., S.E., M.ASCE
Jonas Houston, S.E., A.M.ASCE
Jen-Kan Hsiao, Ph.D., P.E.
Timothy Eugene Huff, Ph.D., P.E., M.ASCE
Brian W. Hulsey, P.E.
Saif Mohammed Hussain, P.E., S.E., F.SEI, LM.ASCE
Jason Maxwell Ingham, M.ASCE
Robert C. Jackson, P.E., F.SEI, F.ASCE
Adam Jongeward, P.E., S.E., M.ASCE
Kamalpreet Singh Kalsi, S.E.
M. R. Karim, Ph.D., P.E., S.E., M.ASCE
Mehrshad Ketabdar, P.E., S.E, M.ASCE
Hayne Kim, Ph.D., S.E., M.ASCE
Insung Kim, Ph.D., P.E., M.ASCE
Allison Konwinski, P.E., S.E.
Lawrence Francis Kruth, P.E., M.ASCE
Amit Kumar, P.E., S.E.
Sashi K. Kunnath, Ph.D., P.E., F.SEI, F.ASCE
Bruce Lloyd Kutter, Ph.D., M.ASCE
Lynsey Willadsen LaScola, P.E., M.ASCE
Ron C. Larsen, P.E.
Dimitrios Lignos, Ph.D., M.ASCE
Bret J. Lizundia,
Richard Jay Love, P.E., S.E., M.ASCE
Bruce Maison, P.E., S.E.
Aaron Charles Malatesta, P.E.
Dion Marriott, Ph.D., S.E.
Mustafa Mashal, Ph.D., P.E., CPEng, IntPE(NZ), M.ASCE
Mohammed Masmoum, R.Eng, M.ASCE
Anthony Thomas Massari, Ph.D., P.E., M.ASCE
Adolfo B. Matamoros, Ph.D., P.E., F.SEI, M.ASCE
Ronald L. Mayes, Ph. D., M.ASCE
John S. McDonald, P.E., S.E., M.ASCE
Russell McLellan, P.E., S.E.
Matthew J. Michnewich, P.E., S.E., M.ASCE
Gary Lee Mochizuki, P.E., S.E., M.ASCE

Ammar Khalil Mohammed, M.ASCE
Douglas Michael Moon, P.E., S.E., M.ASCE
Kevin S. Moore, P.E., S.E., M.ASCE
Guillermo Morado, P.E., M.ASCE
Justin Cole Moresco, P.E., M.ASCE
Hossein Mostafaei, Ph.D., M.ASCE
Konstantinos Oikonomou, Ph.D., P.E., M.ASCE
Milad Oliaee, Ph.D., P.E.
Stuart J. Oliver, S.E., M.ASCE
Brian Olson,
Baki Ozturk, Ph.D., M.ASCE
Conrad Paulson, P.E., M.ASCE
Jennifer Anna Pazdon, P.E.
Daniel E. Pradel, Ph.D., P.E., G.E., D.GE, F.ASCE
Nikhil Raut, Ph.D., P.E., PMP, M.ASCE
Ricardo Roldan, Ph.D., PE
Shubin Ruan, Ph.D., P.E., M.ASCE
Keri L. Ryan, A.M.ASCE
Mehrdad Sasani, Ph.D., P.E., F.SEI, F.ASCE
Siamak Sattar, Ph.D., A.M.ASCE
Benjamin W. Schafer, Ph.D., P.E., F.SEI, M.ASCE
Arturo Ernest Schultz, Ph.D., A.M.ASCE
Halil Sezen, Ph.D., P.E., F.SEI, F.ASCE
Raju Sharma
Pui-Shum Benson Shing, Ph.D., M.ASCE
Constantine Shuhaibar, Ph.D., P.E.
Dan Sloat
Rob Smith, C.Eng, P.E., S.E., M.ASCE
David Sommer, P.E., S.E., M.ASCE
Matthew Speicher, Ph.D., A.M.ASCE
Andreas Stavridis, Ph.D., A.M.ASCE
Spencer Straub, P.E., S.E., M.ASCE
Ali Sumer, Ph.D., S.E.
Kenneth Tam, P.E., S.E.
Bryce G. Tanner, S.E.
Charles Conrad Thiel, Ph.D.
Seth Thomas, P.E., S.E., M.ASCE
Christos V. Tokas
Kevin Quinn Walsh, Ph.D., P.E., S.E.
Zachary J. Whitman, P.E., S.E., A.M.ASCE
Andrew S Whittaker, Ph.D., P.E., S.E., F.SEI, F.ASCE
Gergis W. William, Ph.D., P.E., F.SEI, F.ASCE
Kevin Wong, M.ASCE
Ben Yousefi, P.E., S.E.
Victor A. Zayas, P.E., M.ASCE
Daniel Zepeda, P.E., S.E.

Subcommittee for General Requirements
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE, *Chair*
Shahen Akelyan, P.E., S.E.
William B. Black, P.E., M.ASCE
Katie Boisseree, P.E.
David Bonowitz, S.E.
Matthew E. Bowers, P.E., M.ASCE
Michael Thomas Braund Jr., P.E., S.E., M.ASCE
Rebecca Hix Collins, P.E., S.E., M.ASCE
Roy F. Lobo, Ph.D., S.E., M.ASCE
Nico Luco, Ph.D.
David Mark Martin, S.E., A.M.ASCE
Baki Ozturk, Ph.D., M.ASCE
Sanaz Rezaeian, Ph.D.
Bryce G. Tanner, S.E.
Zia Zafir, Ph.D., P.E., G.E.
Daniel Zepeda, P.E., S.E.

Subcommittee for Analysis
Terry R. Lundeen, P.E.,S.E., M.ASCE, *Chair*
Mohammad AlHamaydeh, Ph.D., P.E., F.SEI, M.ASCE
Mohammad Aliaari, Ph.D., P.E., S.E.
Alireza Asgari, Ph.D., S.E.,
Ari Baranian, P.E.
Daniel Terence Tasman Bech, P.E., S.E., M.ASCE
William B. Black, P.E., M.ASCE
Maikol Del Carpio Ramos, Ph.D., P.E., Aff.M.ASCE
Rebecca Hix Collins, P.E., S.E., M.ASCE
Daniel Gaspar Rodriguez, P.E.
Nikhil Raut, Ph.D., P.E., PMP, M.ASCE
Babak Gerami, P.E., S.E., M.ASCE
Adam Jongeward, P.E., S.E., M.ASCE
Kamalpreet Singh Kalsi, S.E.
Sashi K. Kunnath, Ph.D., P.E., F.SEI, F.ASCE
Bruce Maison,
Dion Marriott, Ph.D., S.E.
Mohammed Masmoum, R.Eng, M.ASCE
Matthew J. Michnewich, P.E., S.E., M.ASCE
Kevin S. Moore, P.E., S.E., M.ASCE
Baki Ozturk, Ph.D., M.ASCE
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE
Ricardo Roldan, Ph.D., P.E.
Owen Arthur Rosenboom, Ph.D., P.E., S.E., M.ASCE
Ali Roufegarinejad, Ph.D., P.E.
Constantine Shuhaibar, Ph.D., P.E.
Matthew Speicher, Ph.D., A.M.ASCE
Zachary J. Whitman, P.E., S.E., A.M.ASCE
Reid B. Zimmerman, P.E., S.E., M.ASCE

Subcommittee for Foundations
Abdalsattar Alfarra, M.ASCE
Mohammad AlHamaydeh, Ph.D., P.E., F.SEI, M.ASCE
Alireza Asgari, Ph.D., S.E.,
William B. Black, P.E., M.ASCE
Matthew E. Bowers, P.E., M.ASCE
Maikol Del Carpio Ramos, Ph.D., P.E., Aff.M.ASCE
Babak Gerami, P.E., S.E., M.ASCE
Hayne Kim, Ph.D., S.E., M.ASCE
Bruce Lloyd Kutter, Ph.D., M.ASCE
Roy F. Lobo, Ph.D., S.E., M.ASCE
Richard J. Love, P.E., M.ASCE
David Mark Martin, A.M.ASCE
Douglas Michael Moon, P.E., S.E., M.ASCE
Kevin S. Moore, P.E., S.E., M.ASCE
Mark A. Moore, S.E., M.ASCE
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE
Daniel Pradel, Ph.D., P.E., G.E., D.GE, F.ASCE
Bryce G. Tanner, S.E.
John M. Tehaney, P.E., S.E., M.ASCE
Seth Thomas, P.E., S.E., M.ASCE
Ryan Turner, P.E., S.E.

Subcommittee for Masonry
William Tremayne, P.E., S.E., *Subcommittee Chair*
Juan Aleman, Ph.D., P.E.
David T. Biggs, P.E., S.E., F.SEI, Dist.M.ASCE
Carlo Citto, P.E., M.ASCE
Nancy H. Devine, P.E., S.E.
Dmytro Dizhur, Ph.D., A.M.ASCE
Jennifer Eggers, P.E., S.E.
Ivan Giongo, Ph.D., P.E., S.E.

Selim Gunay, Ph.D.
Amit Kumar, P.E., S.E.
Matthew C. McBride, S.E., M.ASCE
Milad Oliaee, Ph.D., P.E.
Stuart J. Oliver, S.E., M.ASCE
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE
Pui-Shum Benson Shing, Ph.D., M.ASCE
Can Simsir, Ph.D., P.E., M.ASCE
David Sommer, P.E., S.E., M.ASCE
Andreas Stavridis, Ph.D., A.M.ASCE
Kenneth T. Tam, P.E., S.E.
John M. Tehaney, P.E., S.E., M.ASCE
Frederick Michael Turner, P.E., S.E., M.ASCE
Kevin Quinn Walsh, Ph.D.

Subcommittee for Steel
John L. Harris, Ph.D., P.E., S.E., F.SEI, M.ASCE, *Chair*
Bonnie E. Manley, P.E., F.SEI, M.ASCE, *Vice Chair*
Daniel Terence Tasman Bech, P.E., S.E., M.ASCE
Michael Thomas Braund Jr., P.E., S.E., M.ASCE
Paul P. Cordova
Kamalpreet Singh Kalsi, S.E.
Hayne Kim, Ph.D., S.E., M.ASCE
Seung Jai Ko, P.E., S.E., M.ASCE
Dimitrios Lignos, Ph.D., M.ASCE
Anthony Thomas Massari, Ph.D., P.E., M.ASCE
Baki Ozturk, Ph.D., M.ASCE
Jennifer Anna Pazdon, P.E.
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE
Brandt W. Saxey, P.E., S.E., M.ASCE
Benjamin W Schafer, Ph.D., P.E., F.SEI, M.ASCE
Dan Sloat
Matthew Speicher, Ph.D., A.M.ASCE
Ali Sumer, Ph.D., S.E.

Subcommittee for Seismic Isolation and Energy Dissipation
Reid B. Zimmerman, P.E., S.E., M.ASCE, *Chair*
Ian Aiken, Ph.D., P.E., M.ASCE
Mohammad AlHamaydeh, Ph.D., P.E., F.SEI, M.ASCE
Cameron Black, Ph.D., P.E., M.ASCE
Nathan Canney, Ph.D., P.E., M.ASCE
Scott Darling, P.E.
Konrad Eriksen
Amir S. J. Gilani, Ph.D., SE., M.ASCE
Saif Mohammed Hussain, P.E., S.E., F.SEI, LM.ASCE
Kamalpreet Singh Kalsi, S.E.
M. Karim, Ph.D., P.E., S.E.
Roy Lobo, Ph.D., P.E., S.E., M.ASCE
Aaron Charles Malatesta, P.E.
Dion Marriott, Ph.D., S.E.
Ronald L Mayes, P.E., M.ASCE
Mohammed Mohammed, Ph.D., P.E.
Baki Ozturk, Ph.D., M.ASCE
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE
Ricardo Roldan, Ph.D., P.E.
Ali Roufegarinejad, Ph.D., P.E.
Shubin Ruan, Ph.D., P.E., M.ASCE
Keri L. Ryan, A.M.ASCE
Constantine Shuhaibar, Ph.D., P.E.
William Tremayne, P.E., S.E.
Andrew S. Whittaker, Ph.D., P.E., S.E., F.SEI, F.ASCE
Victor A. Zayas, P.E., M.ASCE

Subcommittee for Tier 2
Russell Berkowitz, P.E., S.E., M.ASCE, *Chair*
Baki Ozturk, Ph.D., M.ASCE
Daniel Zepeda, P.E., S.E.
James Parker, P.E., S.E.
Kevin S. Moore, P.E., S.E., M.ASCE
Matthew J. Michnewich, P.E., S.E., M.ASCE
Michael Brekken, P.E.
Mark A. Moore, S.E., M.ASCE
Nik Blanchette, P.E.
Peter W. Somers, P.E., S.E., M.ASCE
Russell McLellan, P.E., S.E.
John M. Tehaney, P.E., S.E., M.ASCE

Subcommittee for Tier 1
Peter W. Somers, P.E., S.E., M.ASCE, *Chair*
David Bonowitz, S.E.
Michael Brekken, P.E.
William Sandy Cumming, P.E.
John Hinchcliffe, P.E., M.ASCE
Darrick B. Hom, P.E., S.E., M.ASCE
Brian Edward Kehoe, P.E., S.E., F.SEI, F.ASCE
Lynsey Willadsen LaScola, P.E., M.ASCE
Baki Ozturk, Ph.D., M.ASCE
James Parker, P.E., S.E.
Marko IJke Schotanus, Ph.D., P.E., S.E., M.ASCE
Eugene L. Trahern, P.E., S.E., M.ASCE
Daniel Zepeda, P.E., S.E.

Subcommittee for Wood
Philip Line, P.E., M.ASCE, *Chair*
Sandy Cumming, P.E.
Ivan Giongo, Ph.D., P.E., S.E.
Brian Edward Kehoe, P.E., S.E., F.SEI, F.ASCE
Bruce Maison, P.E., S.E.
Matthew C. McBride, S.E., M.ASCE
Gary Lee Mochizuki, P.E., S.E., M.ASCE
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE
Kenneth T. Tam, P.E., S.E.

Subcommittee for Concrete
Wassim M. Ghannoum, Ph.D., P.E., F.SEI, M.ASCE, *Chair*
Satyendra K. Ghosh, Ph.D., F.SEI, F.ASCE
Jeff J. Dragovich, Ph.D., P.E., M.ASCE
Brian Edward Kehoe, P.E., S.E., F.SEI, F.ASCE
Mark A. Moore, S.E., M.ASCE
Mohammad AlHamaydeh, Ph.D., P.E., F.SEI, M.ASCE
Ari Peter Baranian, P.E., M.ASCE
Sergio Francisco Breña, Ph.D., M.ASCE
Paul P. Cordova, Ph.D., P.E., S.E.
Garrett Richard Hagen, P.E., M.ASCE
Jonas Houston, S.E., A.M.ASCE
Mehrshad Ketabdar, P.E., S.E, M.ASCE
Hayne Kim, Ph.D., S.E., M.ASCE
Insung Kim, Ph.D., P.E., M.ASCE
Sashi K. Kunnath, Ph.D., P.E., F.SEI, F.ASCE
Adolfo B. Matamoros, Ph.D., P.E., F.SEI, M.ASCE
Matthew J. Michnewich, P.E., S.E., M.ASCE
Siamak Sattar, Ph.D., A.M.ASCE
Halil Sezen, Ph.D., P.E., F.SEI, F.ASCE
Ali Sumer, Ph.D., S.E.

Subcommittee for Material Testing
Robert George Pekelnicky, P.E., S.E., F.SEI, M.ASCE, *Chair*
Michael Thomas Braund Jr., P.E., S.E., M.ASCE
Carlo Citto, P.E., M.ASCE
John L. Harris, Ph.D., P.E., S.E., F.SEI, M.ASCE
Hayne Kim, Ph.D., S.E., M.ASCE
Insung Kim, Ph.D., P.E., M.ASCE
Philip Line, P.E., M.ASCE
Roy F. Lobo, Ph.D., S.E., M.ASCE
Conrad Paulson, P.E., M.ASCE

Subcommittee for Nonstructural
Brian Edward Kehoe, P.E., S.E., F.SEI, F.ASCE, *Chair*
David Bonowitz, S.E.
Michael Brekken, P.E.
Scott Campbell, Ph.D., P.E., M.ASCE
Maikol Del Carpio Ramos, Ph.D., P.E., Aff.M.ASCE
Babak Gerami, P.E., S.E., M.ASCE
Darrick B. Hom, P.E., S.E., M.ASCE
Mehrshad Ketabdar, P.E., M.ASCE
Guillermo Morado, P.E., M.ASCE
Konstantinos Oikonomou, Ph.D., P.E., M.ASCE
John M. Tehaney, P.E., S.E., M.ASCE

DEDICATION



Michael Mahoney

ASCE 41-23 is dedicated to Mike Mahoney, who recently retired from the Federal Emergency Management Agency (FEMA) after nearly 40 years of service, mostly as a project officer for earthquake engineering programs. Mike's tireless work at FEMA led to many significant updates to this standard and its predecessor FEMA publications. He passionately advocated for FEMA to fund projects that addressed issues related to the seismic safety of new and existing buildings. Many of the FEMA-funded projects he championed and led resulted in material that greatly impacted this standard. In addition to his advocacy for the seismic safety of existing buildings, Mike was involved in or led many FEMA-funded projects that contributed to improvements in ASCE 7-22 *Minimum Design Loads and Associated Criteria for Buildings and Other Structures*. Following the Northridge earthquake, Mike served as FEMA's project officer for the SAC Steel project, resulting in the formation of much of the criteria embedded in ASCE 41 and its referenced standards for steel structures. Of all of Mike's contributions, the most significant to this standard may be his leadership in the formation of a FEMA-funded project, Update Seismic Retrofit Design Guidance, focused solely on technical development, advancement, and improvement of performance-based evaluation and retrofit provisions in ASCE 41. This project has already contributed significantly to ASCE 41-23, and ongoing work will help ensure that future editions remain a cutting-edge resource for performance-based treatment of existing buildings.

UNIT CONVERSIONS

SI Units	*Customary Units*
Measurement	
m = meter (SI base unit of length)	yd = yard
cm = centimeter	in. = inch
km = kilometer	mi = mile
ha = hectare	acre
L = liter (S.I. base unit of volume)	gal. = gallon
mL = milliliters	qt = quart
kg = kilogram (SI base unit of mass)	lb = pound
g = gram	oz = ounce
N = Newton ($m \cdot kg \cdot s^2$)	lbf = pound-force (lb/ft)
Pa = Pascals (N/m^2)	psi = pounds per square inch
kPa = kilopascals	atm = atmosphere
J = Joule ft	lbf = feet per pound-force
W = watt	Btu = British thermal unit
kW = kilowatt	hp = horsepower
s = second (S.I. base unit of time)	s = second
min = minute	min = minute
h = hour	h = hour
day	day
°C = degrees Celsius	°F = degrees Fahrenheit
ppm = parts per million	ppm = parts per million
Length	
1 m = 3.2808 ft = 1.0936 yd	1 ft = 3 yd = 0.3048 m
1 cm = 0.3937 in.	1 in. = 2.54 cm
1 km = 0.6214 mile	1 mile = 0.869 nautical mile = 1.6093 km
Area	
$1 m^2 = 10.7643 ft^2$	$1 ft^2 = 0.0929 m^2$
$1 km^2 = 0.3861 mi^2$	$1 mi^2 = 2.59 km^2$
1 ha = 2.4710 acre	1 acre = 43,560 ft^2 = 0.4047 ha
Volume 1 L = 0.2642 gal.	1 gal. = 4 qt = 3.7854 L
1 ml = 1 cm^3	$1 ft^3$ = 7.481 gal. = 28.32 L
Mass	
1 g = 0.0353 oz	1 oz = 28.3495 g
1 kg = 2.2046 lb	1 lb = 0.4536 kg
Force	
1 N = 0.2248 lb/ft	1 lbf = 4.4482 N
Density	
$1 kg/m^2 = 0.2048 lb/ft^2$	$1 lb/ft^2 = 4.882 kg/m^2$
$1 kg/m^3 = 6.2427 lb/ft^3$	$1 lb/ft^3 = 16.018 kg/m^3$
Pressure	
1 kPa = 0.145 psi	1 psi = 6.8948 kPa
1 atm = 14.7	1 psi = 101.35 kPa
Energy and Power	
1 J = 1.00 W·s = 0.7376 ft·lbf	1 ft·lbf = 1.3558 J
1 kJ = 0.2778 W·h = 0.948 Btu	1 Btu = 1.0551 kJ
1 W = 0.7376 ft·lbf/s = 3.4122 Btu/h	1 ft·lbf/s = 1.3558 W
1 kW = 1,3410 hp	1 hp = 550 ft·lb/s = 0.7457 kW
Flow Concentration Temperature	1 L/s = 15.85 gal./min = 2.119 ft^3/min 1 gal./min = 0.1337 ft^3/min = 0.0631 L/s mg/L = ppm_m (in dilute solutions) °C = (°F − 32) × 5/9 °F = (°C × 9/5) + 32 Acceleration of gravity 32.2 ft/s^2 = 9.81 m/s^2
Fundamental Constants and Relationships	Density of water (at 4 °C) = 1,000 kg/m^3 = 1 g/cm^3 Specific weight of water (15 °C) = 62.4 lb/ft^3 = 9,810 N/m^3 Weight of water 1 gal. = 8.345 lb = 3.7854 kg

CHAPTER 1
GENERAL REQUIREMENTS

1.1 SCOPE

This standard, *Seismic Evaluation and Retrofit of Existing Buildings*, referred to herein as "this standard," specifies provisions for the seismic evaluation and retrofit of buildings. Seismic evaluation and retrofit of existing buildings shall comply with requirements of this standard to demonstrate compliance or noncompliance with, or achievement of Performance Objectives. Definitions and notation used throughout this standard are contained in Section 1.2. References used throughout this standard are cited separately in Chapter 18. Where standards are referenced and no edition or date is appended, then the edition or dated document listed in Chapter 18 is to be used. The processes for using this standard for seismic evaluation and retrofit and the associated procedures are defined in Sections 1.3 and 1.4, respectively.

1.2 DEFINITIONS AND NOTATION

1.2.1 Definitions

Acceleration-Sensitive Component: A component that is sensitive to, and subject to, damage from inertial loading.

Acceptance Criteria: Limiting values of properties, such as drift, strength demand, and inelastic deformation, used to determine the acceptability of a component at a given Performance Level.

Action: An internal moment, shear, torque, axial force, deformation, displacement, or rotation corresponding to a displacement caused by a structural degree of freedom; designated as force or deformation controlled.

Active Fault: A fault for which there is an average historic slip rate of 0.04 in. (1 mm) per year or more and evidence of seismic activity within Holocene times (the last 11,000 years).

Adaptive Model: An element model where component nonlinear action is represented by a force–deformation curve whose points change in the mathematical model based on the previous loading undergone in the mathematical model. Adaptive models should be capable of acceptable representing monotonic and cyclic response, and cyclic response to different loading protocols, as demonstrated by laboratory test data.

Aspect Ratio: Ratio of full height to length for concrete and masonry shear walls; ratio of story height to length for wood shear walls; ratio of span to depth for horizontal diaphragms.

Assembly: Two or more interconnected components.

Authority Having Jurisdiction: The organization, political subdivision, office, or individual legally charged with responsibility for administering and enforcing the provisions of this standard.

Balloon Framing: Continuous stud framing from sill to roof, with intervening floor joists nailed to studs and supported by a let-in ribbon.

Base: The level at which the horizontal seismic ground motions are considered to be imparted to the structure.

Basic Performance Objective for Existing Buildings (BPOE): A series of defined Performance Objectives based on a building's risk category meant for evaluation and retrofit of existing buildings. See Section 2.2.1.

Basic Performance Objective Equivalent to New Building Standards (BPON): A series of defined Performance Objectives based on a building's risk category meant for evaluation and retrofit of existing buildings to achieve a level of performance commensurate with the intended performance of buildings designed to a standard for new construction. *See* Chapter 2.

Beam: A structural member whose primary function is to carry loads transverse to its longitudinal axis.

Bearing Wall: A wall that supports gravity loads of at least 200 lb/ft (2,919 N/m) from floors or roofs.

Bed Joint: The horizontal layer of mortar on which a masonry unit is laid.

Benchmark Building: A building designed and constructed or evaluated to a specific performance level using an acceptable code or standard listed in Table 4-6.

Boundary Component: A structural component at the boundary of a shear wall or a diaphragm or at an edge of an opening in a shear wall or a diaphragm that possesses tensile or compressive strength to transfer lateral forces to the seismic-force-resisting system.

Braced Frame: A structural system consisting of vertical, horizontal, and diagonal structural components joined by concentric or eccentric connections. *See* **Concentrically Braced Frame** or **Eccentrically Braced Frame**.

BSE-1E: Basic Safety Earthquake-1 for use with the Basic Performance Objective for Existing Buildings, taken as a seismic hazard with a 20% probability of exceedance in 50 years, but not greater than the BSE-1N, at a site.

BSE-1N: Basic Safety Earthquake-1 for use with the Basic Performance Objective Equivalent to New Building Standards, taken as two-thirds of the BSE-2N at a site.

BSE-1X: Basic Safety Earthquake-1, either the BSE-1E or BSE-1N.

BSE-2E: Basic Safety Earthquake-2 for use with the Basic Performance Objective for Existing Buildings, taken as a seismic hazard with a 5% probability of exceedance in 50 years, but not greater than the BSE-2N, at a site.

BSE-2N: Basic Safety Earthquake-2 for use with the Basic Performance Objective Equivalent to New Building Standards, taken as the ground shaking based on the Risk-Targeted Maximum Considered Earthquake (MCE_R) per ASCE 7 at a site.

BSE-2X: Basic Safety Earthquake-2, either the BSE-2E or BSE-2N.