IEC 61000-3-12

Edition 2.1 2021-06
CONSOLIDATED VERSION

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Electromagnetic compatibility (EMC) – Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤ 75 A per phase

Compatibilité électromagnétique (CEM) – Partie 3-12: Limites – Limites pour les courants harmoniques produits par les appareils connectés aux réseaux publics basse tension ayant un courant appelé >16 A et ≤75 A par phase



IEC 61000-3-12:2011-05+AMD1:2021-06 CSV(en-fr)



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC
La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC
Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform
La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, …). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished
Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch
Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org
Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

IEC 61000-3-12

Edition 2.1 2021-06
CONSOLIDATED VERSION

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Electromagnetic compatibility (EMC) – Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤ 75 A per phase

Compatibilité électromagnétique (CEM) – Partie 3-12: Limites – Limites pour les courants harmoniques produits par les appareils connectés aux réseaux publics basse tension ayant un courant appelé >16 A et ≤75 A par phase

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 33.100.10

ISBN 978-2-8322-9869-5

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

IEC 61000-3-12

Edition 2.1 2021-06
CONSOLIDATED VERSION

REDLINE VERSION

VERSION REDLINE

colour inside

Electromagnetic compatibility (EMC) – Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤ 75 A per phase

Compatibilité électromagnétique (CEM) – Partie 3-12: Limites – Limites pour les courants harmoniques produits par les appareils connectés aux réseaux publics basse tension ayant un courant appelé >16 A et ≤75 A par phase



IEC 61000-3-12:2011-05+AMD1:2021-06 CSV(en-fr)

SC 77A/Publication IEC 61000-3-12 (2011), Second edition/I-SH 01

ELECTROMAGNETIC COMPATIBILITY (EMC) –

Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤75 A per phase

INTERPRETATION SHEET

This interpretation sheet has been prepared by subcommittee 77A: Low frequency phenomena, of IEC technical committee 77: Electromagnetic compatibility.

The text of this interpretation sheet is based on the following documents:

ISH	Report on voting
77A/792/ISH	77A/800/RVD

Full information on the voting for the approval of this interpretation sheet can be found in the report on voting indicated in the above table.

_____

Interpretation of requirements for equipment with unforeseen low input currents during tests according to IEC 61000-3-12:2011: Electromagnetic compatibility (EMC) – Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤75 A per phase.

When equipment that has a rated current above 16 A draws a reference current that is less than 16 A under the specified test conditions, the manufacturer may proceed in one of the following ways:

1) Comply with the proportional limits as calculated, choosing the required R_{sce};

2) Comply with the absolute limits given in IEC 61000-3-2:2011, Table 1, using the measurement procedure defined in 4.2.2 in IEC 61000-3-12:2011;

   In that case, the manufacturer shall state in the instruction manual “Equipment complying with IEC 61000-3-12”, without having to declare a minimum short circuit power S_{sc}.

3) Change the test conditions to a representative 2,5 min period, as defined in IEC 61000-3-12:2011, Table 1 for long cyclic equipment, and comply with the proportional limits as calculated, choosing the required R_{sce}.

The manufacturer is strongly advised to state in the test report which of these ways was used, so that subsequent tests are carried out with the same procedure.

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 7
2 Normative references 8
3 Terms and definitions 8
4 Measurement conditions 12
4.1 Determination of the reference current 12
4.2 Harmonic current measurement 12
4.2.1 General 12
4.2.2 Measurement procedure 12
4.2.3 Repeatability 13
4.2.4 Starting and stopping 13
4.2.5 Application of limits 13
4.2.6 Test report 13
4.2.7 Test observation period 13
4.3 Equipment consisting of several self-contained items 14
5 Requirements and limits for equipment 14
5.1 Control methods 14
5.2 Limits for emission 14
5.3 Procedure if the reference current is less than 16 A 18
6 Product documentation 19
7 Test and simulation conditions 20
7.1 General 20
7.2 Requirements for direct measurement 20
7.3 Requirements for simulation 21
7.4 General conditions for test and simulation 22
Annex A (normative) Type test conditions 23
Annex B (informative) Illustration of limits for harmonic currents 25
Annex C (informative) Equipment not complying with the requirements and limits of this standard 26
Bibliography 27

Figure 1 – Definition of the 5th harmonic current phase angle (I_5 leads U_{p1}, $\alpha_5 > 0$) 11
Figure 2 – Definition of the 5th harmonic current phase angle (I_5 lags U_{p1}, $\alpha_5 < 0$) 12
Figure 3 – Flowchart of the application procedure 18
Figure B.1 – Limits of the 5th harmonic current as functions of R_{sce} 25

Table 1 – Values of the observation period 14
Table 2 – Current emission limits for equipment other than balanced three-phase equipment 16
Table 3 – Current emission limits for balanced three-phase equipment 17
Table 4 – Current emission limits for balanced three-phase equipment under specified conditions (a, b, c) 17

Table 5 – Current emission limits for balanced three-phase equipment under specified conditions (d, e, f) 17

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

ELECTROMAGNETIC COMPATIBILITY (EMC) –

Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤75 A per phase

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 61000-3-12 edition 2.1 contains the second edition (2011-05) [documents 77A/740/FDIS and 77A/747/RVD], its interpretation sheet 1 (2012-09) and its amendment 1 (2021-06) [documents 77A/1042/CDV and 77A/1074/RVC].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 61000-3-12 has been prepared by subcommittee 77A: Low frequency phenomena, of IEC technical committee 77: Electromagnetic compatibility.

This second edition constitutes a technical revision.

The significant technical changes with respect to the previous edition are listed below:

– the reference fundamental current I_1 is replaced by the reference current I_{ref} for the calculation of emission limits;
– a new table of current emission limits (Table 5) is added;
– a new annex (Annex A) is added to define test conditions for some types of equipment;
– former Annexes B (Approximate interpolation formulas) and D (Information on the $PWHD$ factor) are deleted.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 61000 series, published under the general title *Electromagnetic compatibility (EMC)*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 61000 is published in separate parts according to the following structure:

Part 1: General

General considerations (introduction, fundamental principles)

Definitions, terminology

Part 2: Environment

Description of the environment

Classification of the environment

Compatibility levels

Part 3: Limits

Emission limits

Immunity limits
(in so far as they do not fall under the responsibility of the product committees)

Part 4: Testing and measurement techniques

Measurement techniques

Testing techniques

Part 5: Installation and mitigation guidelines

Installation guidelines

Mitigation methods and devices

Part 6: Generic standards

Part 9: Miscellaneous

Each part is further subdivided into several parts, published either as International Standards or as technical specifications or technical reports, some of which have already been published as sections. Others will be published with the part number followed by a dash and a second number identifying the subdivision (example: IEC 61000-6-1).

This International Standard is a Product Family Standard.

ELECTROMAGNETIC COMPATIBILITY (EMC) –

Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current >16 A and ≤75 A per phase

1 Scope

This part of IEC 61000 deals with the limitation of harmonic currents injected into the public supply system. The limits given in this International Standard are applicable to electrical and electronic equipment with a rated input current exceeding 16 A and up to and including 75 A per phase, intended to be connected to public low-voltage ~~a.c.~~ AC distribution systems of the following types:

- nominal voltage up to 240 V, single-phase, two or three wires;
- nominal voltage up to 690 V, three-phase, three or four wires;
- nominal frequency 50 Hz or 60 Hz.

Other distribution systems are excluded. The limits given in this edition apply to equipment when connected to 230/400 V, 50 Hz systems. See also Clause 5.

NOTE 1 The limits for the other systems will be added in a future edition of this standard.

NOTE 2 Equipment with a rated input current exceeding 75 A per phase should be considered in the harmonic current requirements for installations. See IEC/TR 61000-3-6 and ~~future~~ IEC/TR 61000-3-14.

This standard applies to equipment intended to be connected to low-voltage systems interfacing with the public supply at the low-voltage level. It does not apply to equipment intended to be connected only to private low-voltage systems interfacing with the public supply only at the medium- or high-voltage level.

NOTE 3 The scope of this standard is limited to equipment connected to public low voltage systems because emissions from equipment installed in private low voltage systems can be controlled in aggregate at the MV point of common coupling using procedures defined in IEC/TR 61000-3-6 and/or by means of contractual agreements between the distribution network operator and the customer. It is expected that operators of private systems will manage the EMC environment in a manner that ensures compliance with the provisions given in IEC/TR 61000-3-6 and/or the contractual agreements.

NOTE 4 If the equipment is intended to be connected only to private systems, the manufacturer should make this very clear in the product documentation.

NOTE 5 Professional equipment with input current ≤16 A per phase and that does not comply with the requirements and limits of standard IEC 61000-3-2 may be permitted to be connected to certain types of low voltage supplies, in the same way as equipment with input current >16 A per phase and that does not comply with the requirements and limits of the present standard (see Annex C).

NOTE 6 The limits in this standard are not applicable to stand-alone harmonic filters.

This standard defines:

a) requirements and emission limits for equipment;

b) methods for type tests and simulations.

Tests according to this International Standard are type tests of complete pieces of equipment.

Conformity with this standard can also be determined by validated simulations.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60038, *IEC standard voltages*

IEC 60050(161):1990, *International Electrotechnical Vocabulary – Chapter 161: Electromagnetic compatibility*
Amendment 1 (1997)
Amendment 2 (1998)

IEC 61000-2-2, *Electromagnetic compatibility (EMC) – Part 2-2: Environment – Compatibility levels for low-frequency conducted disturbances and signalling in public low-voltage power supply systems*

IEC 61000-2-4, *Electromagnetic compatibility (EMC) – Part 2-4: Environment – Compatibility levels in industrial plants for low-frequency conducted disturbances*

IEC 61000-3-2:2018, *Electromagnetic compatibility (EMC) – Part 3-2: Limits – Limits for harmonic current emissions (equipment input current ≤16 A per phase)*
IEC 61000-3-2:2018/AMD1:2020

IEC 61000-4-7, *Electromagnetic compatibility (EMC) – Part 4-7: Testing and measurement techniques – General guide on harmonics and interharmonics measurements and instrumentation, for power supply systems and equipment connected thereto*

3 Terms and definitions

For the purposes of this document, the definitions given in IEC 60050~~(~~-161~~)~~ and the following ~~definitions~~ apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1
total harmonic current
THC
total r.m.s. value of the harmonic current components of orders 2 to 40

$$THC = \sqrt{\sum_{h=2}^{40} I_h^2}$$

3.2
partial weighted harmonic current
PWHC
total r.m.s. value of a selected group of higher order harmonic current components (in this International Standard from order 14 to order 40), weighted with the harmonic order h

$$PWHC = \sqrt{\sum_{h=14}^{40} h \cdot I_h{}^2}$$

NOTE The partial weighted harmonic current is employed in order to ensure that the effects of the higher order harmonic currents on the results are reduced sufficiently and individual limits need not be specified.

3.3
point of common coupling
PCC
point in the public system which is closest to the customer concerned and to which other customers are or may be connected

3.4
single-phase equipment
equipment connected between one line conductor and the neutral conductor

NOTE This includes equipment in which separate loads are connected from one or more line conductors to the neutral conductor

3.5
interphase equipment
equipment connected between two line conductors (phases)

NOTE The neutral conductor is not used as a current-carrying conductor under normal operating conditions.

3.6
three-phase equipment
equipment connected to the three line conductors

NOTE 1 The neutral conductor is not used as a current-carrying conductor under normal operating conditions.

NOTE 2 Equipment intended to be connected to all three phases and to the neutral and where the neutral conductor is used as a current-carrying conductor, is considered as three separate single-phase items or as hybrid equipment.

3.7
balanced three-phase equipment
three-phase equipment connected to the three line conductors of a three-phase supply and in which the three line or phase currents are designed to be identical in amplitude and wave-shape, each being displaced from the other two by one-third of a fundamental period

3.8
unbalanced three-phase equipment
three-phase equipment connected to the three line conductors of a three-phase supply and in which the three line or phase currents are not designed to be identical in amplitude or wave-shape, or the displacement between any two is other than one-third of a fundamental period

3.9
hybrid equipment
combination of a balanced three-phase load and one or more loads connected between phase and neutral or between phases

3.10
short-circuit power
S_{sc}
value of the three-phase short-circuit power calculated from the nominal interphase system voltage $U_{nominal}$ and the line impedance Z of the system at the PCC:

$$S_{sc} = U^2_{nominal} / Z$$

where Z is the system impedance at the power frequency

3.11
rated apparent power of the equipment
S_{equ}
value calculated from the rated current I_{equ} of the piece of equipment stated by the manufacturer and the rated voltage U_p (single phase) or U_i (interphase) as follows:

a) $S_{equ} = U_p\ I_{equ}$ for single-phase equipment and the single-phase part of hybrid equipment;

b) $S_{equ} = U_i\ I_{equ}$ for interphase equipment;

c) $S_{equ} = \sqrt{3}\ U_i\ I_{equ}$ for balanced three-phase equipment and the three-phase part of hybrid equipment;

d) $S_{equ} = \sqrt{3}\ U_i\ I_{equ\ max}$ for unbalanced three-phase equipment, where $I_{equ\ max}$ is the maximum of the r.m.s. currents flowing in any one of the three phases

NOTE In the case of a voltage range, U_p or U_i is a nominal system voltage according to IEC 60038 (for example: 120 V or 230 V for single-phase or 400 V line-to-line for three-phase).

3.12
reference current
I_{ref}
value of the r.m.s. input current of the equipment determined according to 4.1 and used to establish emission limits

3.13
rated current of the equipment
I_{equ}
input current of the piece of equipment as declared by the manufacturer and marked as such on the rating plate of the piece of equipment or stated in the product documents

3.14
short-circuit ratio
R_{sce}
characteristic value of a piece of equipment defined as follows:

a) $R_{sce} = S_{sc} / (3\ S_{equ})$ for single-phase equipment and the single-phase part of hybrid equipment;

b) $R_{sce} = S_{sc} / (2\ S_{equ})$ for interphase equipment;

c) $R_{sce} = S_{sc} / S_{equ}$ for all three-phase equipment and the three-phase part of hybrid equipment

NOTE 1 R_{sce} may be related directly to basic known quantities by means of the equations:

$R_{sce} = U/(\sqrt{3} \times Z \times I_{equ})$ for single-phase equipment and the single phase part of hybrid equipment;

$R_{sce} = U/(2 \times Z \times I_{equ})$ for interphase equipment;

$R_{sce} = U/(\sqrt{3} \times Z \times I_{equ})$ for balanced three-phase equipment and the three-phase part of hybrid equipment;

$R_{sce} = U/(\sqrt{3} \times Z \times I_{equ\ max})$ for unbalanced three-phase equipment

where $U = U_{nominal}$, and is assumed to be equal to U_i or $\sqrt{3} \times U_p$, whichever is relevant.

NOTE 2 R_{sce} is not the same as R_{sc}, as defined in IEC 61000-2-6.

NOTE 3 For hybrid equipment, the method of calculating a single R_{sce} value is given in 5.2.

3.15
stand-by mode
non-operational, low power consumption mode (usually indicated in some way on the equipment) that can persist for an indefinite time

NOTE This mode is sometimes termed sleep mode.

3.16
phase angle of I_5 related to the fundamental phase-to-neutral voltage U_{p1}
phase angle of the 5th harmonic current determined as described in Figures 1 and 2

3.17
professional equipment
equipment for use in trades, professions, or industries and which is not intended for sale to the general public

NOTE The designation is specified by the manufacturer.

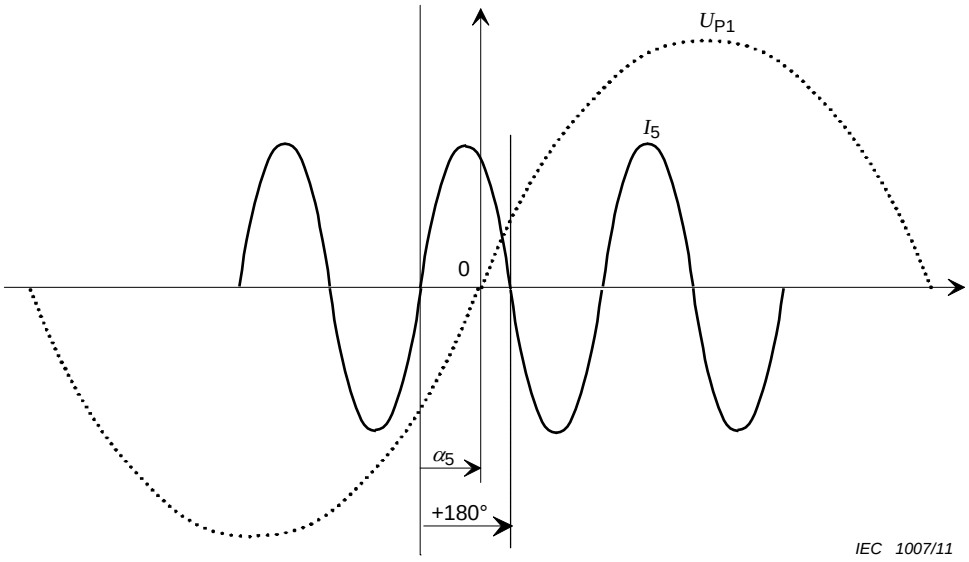


Figure 1 – Definition of the 5th harmonic current phase angle (I_5 leads U_{p1}, $\alpha_5 > 0$)