TECHNICAL REPORT

ISO/TR 23262

First edition
2021-05

GIS (geospatial) / BIM interoperability

GIS (géospatial) / Interopérabilité BIM

Reference number
ISO/TR 23262:2021(E)

© ISO 2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword ... **iv**
Introduction ... **v**
1 Scope ... **1**
2 Normative references ... **1**
3 Terms and definitions ... **1**
4 Abbreviated terms ... **3**
5 Specification of BIM and GIS interoperability issues ... **4**
5.1 General ... 4
5.2 BIM and GIS interoperability levels ... 5
5.2.1 General ... 5
5.2.2 Data level ... 5
5.2.3 Service level ... 16
5.3 GIS/BIM incompatibilities ... 19
5.3.1 General ... 19
5.3.2 Incompatibilities ... 19
6 GIS/BIM interoperability opportunities ... **23**
6.1 General ... 23
6.2 Data interoperability opportunities ... 23
6.3 Service interoperation opportunities ... 26
6.3.1 General ... 26
6.3.2 GIS-to-BIM ... 26
6.3.3 BIM-to-GIS ... 27
7 Suggestions for further work ... **28**
7.1 General ... 28
7.2 Linking abstract concepts in BIM and GIS standards (opportunity 1 and 2) ... 28
7.3 Geospatial and BIM dictionary (opportunity 3) ... 28
7.4 Information exchange guidelines between BIM and GIS ... 29
Annex A Handling of information about construction objects (product handling) ... **31**
Annex B IFC and data templates ... **35**
Annex C Georeferencing ... **37**
Annex D Spatial representation ... **47**
Bibliography ... **58**

© ISO 2021 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 59, *Buildings and civil engineering works*, Subcommittee SC 13, *Organization and digitization of information about buildings and civil engineering works, including building information modelling (BIM)*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2021 – All rights reserved

Introduction

The complexity of information needed to support decisions relating to built assets by the public and private sectors as well as by citizens, require digitally enabled practices based upon interoperable systems. Indeed, the decisions that are needed over a built asset's life cycle and across its different stages rely on these complex sets of information. Moreover, these decisions are made by a multitude of actors that perform information-processing activities such as data creation, capture, transformation, and analysis, and are embodied in project and asset management practices as defined in existing and emerging standards.

Consequently, several initiatives aimed at the digitalization of built assets at regional, national and international levels have spurred considerable investments around the globe. A key component of these initiatives concerns the need for collaboration and interoperability between information processing systems. These systems rely on digital practices that support digital engineering and asset life cycle management, which rely heavily on different domains of information modelling. These domains include both the observed natural environment and built structures. They also span many scales, from the fabricated asset to its territorial and contextual setting. In this case, the domain of geographic information, "maps", and geomatics, is encompassed with the concept of geographic information systems (GIS), whereas the built asset and its parts is encompassed by the concept of building information modelling (BIM). Traditionally these two information systems have been viewed as separate domains. From a digital engineering and asset management perspective however, there is an increasing overlap and need for interoperability between the two, as illustrated in Figure 1.

The two domains can also be viewed as two different sets of tools, used by several disciplines/domains.

The geospatial domain with its many professions (e.g. land management, engineering surveying, geodata management, remote sensing and cartography) uses GIS tools to acquire, manage, analyse, distribute and present geospatial information.

The geospatial domain handles (most of the time) descriptive models that are designed for many purposes and long-term use and were formerly presented on maps in scale 1:100 to 1:100 000 000. But as the need for geospatial applications varies greatly between actors, the main standardization committee for geomatics, ISO/TC 211, focuses on enabling the development of application schema. The main focus has been on a set of common rules for the development of application schemas (ISO 19109). However, there are applications schemas provided in other organisations, like OGC's CityGML standard for urban environments (including buildings). Buildings (and their urban environment) and the data specification for buildings in the European INSPIRE directive, both based upon ISO/TC 211 standards, including ISO 19109.

The AECO (architecture, engineering, construction and operations) domain with its many professions (e.g. project development, architecture, civil engineering, contractor, facility management) related to planning, designing, building and operating built assets (buildings, infrastructure, etc.) uses the evolving BIM method for collaborative and digital processes in construction projects and for asset management. The models are (most of the time) prescriptive models, designed for a specific purpose and project phase and were formerly presented on drawings in scale 10:1 to 1:1 000, including landscape drawings, rail and road geometrics. These AECO disciplines have at least one thing in common: the building.

© ISO 2021 – All rights reserved

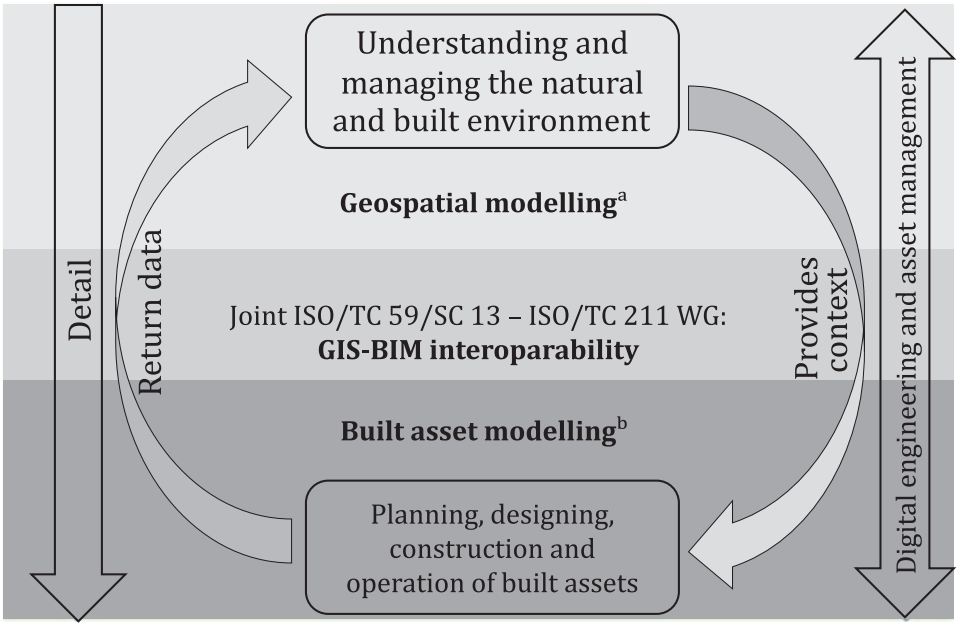

[a] ISO/TC 211: ISO 19101 (all parts), ISO 19103, ISO 19104, ISO 19105, ISO 19106, ISO 19107, ISO 19108, ISO 19109, ISO 19110, ISO 19111, ISO 19136 (all parts), ISO 19150 (all parts).

[b] ISO/TC 59/SC 13: ISO 16739-1, ISO 29481 (all parts), ISO 19650 (all parts), ISO 12006 (all parts).

Figure 1 — Standards that relate to the cycle of information flow between geospatial and BIM domains (adapted from a diagram developed by the Joint OGC / bSI IDBE Working Group)

To date, the interaction between the BIM and the GIS domains has not been intuitive or seamless. In its simplified form the GIS, or geospatial modelling, domain has traditionally focused on modelling at the territorial scale and has adopted a large perspective of the observed environment which includes a multitude of distributed assets. The BIM domain has focused more on modelling the components of a single built asset. With the move towards integrated information environments, the differences in focus and scale between the two domains are diminishing. Arguably, use cases and perspectives in both domains are converging and overlapping. Indeed, and as mentioned, decisions pertaining to built assets typically require data and information that span both domains. Therefore, information models from both domains are becoming increasingly bound to each other: every built asset has a location and is situated within a context relative to the existing environment. Conversely, the existing environment incorporates all built assets.

With this move towards integrated information environments, use cases will increasingly require seamless transitions between both domains and their information models, from the bird's eye perspective to the manufactured component found within a built asset, to support the various asset life cycle practices and requirements within a specified context as illustrated in Figure 1. A key challenge in achieving this seamless transition or movement between both domains is ensuring the interoperability in systems used for geospatial information modelling and built asset information modelling. Currently, state-of-the-art modelling of geospatial information is based upon international standards developed and maintained by ISO/TC 211 and Open Geospatial Consortium, Inc. (OGC), whereas state-of-the-art modelling of built assets is based upon standards developed and maintained by ISO/TC 59/SC 13 and buildingSMART International (bSI).

This document aims to identify measures to enable interoperability between the two domains. These measures are expected be developed in either ISO/TC 211, ISO/TC 59/SC 13 or as a joint work between the two committees. To achieve this the enterprise interoperability framework (EIF) defined in ISO 11354 (all parts) has been used, focusing on the need for interoperability in data, services and processes to ensure seamless exchanges and transitions between both domains. First this document focuses on identifying standards within the two aforementioned interoperability levels. Barriers, or

 © ISO 2021 – All rights reserved

incompatibilities, between the two domains are then exposed and discussed. Lastly, specific work packages aimed at eliminating these barriers are identified and suggestions for future work aimed at streamlining interoperability between the two domains are made.

© ISO 2021 – All rights reserved

GIS (geospatial) / BIM interoperability

1 Scope

This document investigates barriers and proposes measures to improve interoperability between geospatial and BIM domains, namely, to align GIS standards developed by ISO/TC 211 and BIM standards developed by ISO/TC 59/SC 13.

Where relevant this document takes into account work and documents from other organizations and committees, such as buildingSMART, International (bSI), Open Geospatial Consortium (OGC) and Comité Européen de Normalisation (CEN). The focus is to identify future topics for standardization and possible revision needs of existing standards.

This document investigates conceptual and technological barriers between GIS and BIM domains at the data, service and process levels, as defined by ISO 11354 (all parts).

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at http://www.electropedia.org/

3.1
application schema
conceptual *schema* (3.13) for *data* (3.5) required by one or more applications

[SOURCE: ISO 19101-1:2014, 4.1.2]

3.2
conceptual model
data (3.5) model that represents an abstract view of the real world

Note 1 to entry: A conceptual model represents the human understanding of a system.

[SOURCE: ISO/IEC 11179-1:2015, 3.2.5, modified — The preferred term "conceptual data model" has been removed.]

3.3
conceptual schema
formal description of a *conceptual model* (3.2)

[SOURCE: ISO 19101-1:2014, 4.1.6]

© ISO 2021 – All rights reserved

3.4
conceptual schema language
formal language based on a conceptual formalism for the purpose of representing *conceptual schemas* (3.3)

EXAMPLE UML, EXPRESS, IDEFX1.

Note 1 to entry: A conceptual schema language may be lexical or graphical. Several conceptual schema languages can be based on the same conceptual formalism.

[SOURCE: ISO 19101-1:2014, 4.1.7]

3.5
data
reinterpretable representation of *information* (3.9) in a formalized manner suitable for communication, interpretation, or processing

Note 1 to entry: Data can be processed by humans or by automatic means.

[SOURCE: ISO/IEC 2382:2015, 2121272, modified — Notes 2 and 3 to entry have been removed.]

3.6
dataset
named collection of *data* (3.5)

3.7
data template
schema (3.13) providing a standardized *data* (3.5) structure used to describe the characteristics of objects

3.8
implementation
realization of a specification

[SOURCE: ISO 19105:2000, 3.18, modified — Note 1 to entry has been removed.]

3.9
information
meaningful *data* (3.5)

[SOURCE: ISO 9000:2015, 3.8.2]

3.10
interoperability
capability of two or more functional units to process *data* (3.5) cooperatively

[SOURCE: ISO/IEC 2382:2015, 2120585, modified — The domain "<distributed data processing>" and notes to entry have been removed.]

3.11
metamodel
model that specifies one or more other models

[SOURCE: ISO/IEC 11179-3:2013, 3.2.80]

3.12
ontology
formal, explicit specification of a shared conceptualization

Note 1 to entry: An ontology typically includes definitions of concepts and specified relationships between them, set out in a formal way so that a machine can use them for reasoning.

© ISO 2021 – All rights reserved

Note 2 to entry: See also ISO/TR 13054:2012, 2.6; ISO/TS 13399-4:2014, 3.20; ISO 19101-1-2014, 4.1.26; ISO 18435-3:2015, 3.1; ISO/IEC 19763-3:2020, 3.1.1.1.

[SOURCE: ISO 5127:2017, 3.1.2.03, modified — References in note 2 to entry have been editorially updated.]

3.13
schema
formal description of a model

[SOURCE: ISO 19101-1:2014, 4.1.34]

3.14
semantic interoperability
capability of two or more systems to communicate and exchange *data* (3.5) through specified data formats and communication protocols

[SOURCE: ISO 18308:2011, 3.48]

3.15
service
distinct part of the functionality that is provided by an entity through interfaces

[SOURCE: ISO 19119:2016, 4.1.12]

4 Abbreviated terms

API	application programming interface
AECO	architecture, engineering, construction, and operations
AIM	asset information model
ARM	application reference model
BAT	BIM authoring tools
BIM	building information modelling
BOM	business object model
CDE	common data environment
CEN	Comité Européen de Normalisation
CRS	coordinate reference system
GIS	geographic information system
GFM	general feature model (in ISO 19109)
GML	Geography Markup Language
ICT	information and communications technology
IFC	Industry Foundation Classes
IFD	International Framework for Dictionaries
IDM	information delivery manuals

© ISO 2021 – All rights reserved