IEC 62386-103

Edition 2.0 2022-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Digital addressable lighting interface – Part 103: General requirements – Control devices

Interface d'éclairage adressable numérique – Partie 103: Exigences générales – Dispositifs de commande



IEC 62386-103:2022-11(en-fr)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC
La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC
Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC - webstore.iec.ch/advsearchform
La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, …). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished
Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc
Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org
Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

IEC 62386-103

Edition 2.0 2022-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

colour inside

Digital addressable lighting interface – Part 103: General requirements – Control devices

Interface d'éclairage adressable numérique – Partie 103: Exigences générales – Dispositifs de commande

INTERNATIONAL ELECTROTECHNICAL COMMISSION

COMMISSION ELECTROTECHNIQUE INTERNATIONALE

ICS 29.140.50; 29.140.99

ISBN 978-2-8322-5966-5

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

® Registered trademark of the International Electrotechnical Commission
Marque déposée de la Commission Electrotechnique Internationale

CONTENTS

FOREWORD 7
INTRODUCTION 9
1 Scope 11
2 Normative references 11
3 Terms and definitions 11
4 General 14
4.1 General 14
4.2 Version number 14
5 Electrical specification 15
6 Bus power supply 15
7 Transmission protocol structure 15
7.1 General 15
7.2 24-bit forward frame encoding 15
7.2.1 Frame format for instructions and queries 15
7.2.2 Frame format for event messages 17
8 Timing 18
9 Method of operation 18
9.1 General 18
9.2 Device features 18
9.3 Application controller 18
9.3.1 General 18
9.3.2 Single-master application controller 19
9.3.3 Multi-master application controller 19
9.4 Input device 20
9.5 Instances of input devices 20
9.5.1 General 20
9.5.2 Instance number 20
9.5.3 Instance type 20
9.5.4 Instance features 20
9.5.5 Instance groups 21
9.6 Commands excluding event messages 21
9.6.1 General 21
9.6.2 Device commands 22
9.6.3 Instance commands 22
9.6.4 Feature commands 22
9.7 Event messages 23
9.7.1 Response to event messages 23
9.7.2 Device power cycle event 23
9.7.3 Input notification event 23
9.7.4 Event message filter 24
9.8 Input signal, measured value and “*inputValue*” 24
9.8.1 General 24
9.8.2 Input resolution 24
9.8.3 Getting the input value 25
9.8.4 Notification of changes 26

9.9 System failure 26
9.10 Operating a control device 26
9.10.1 Enable/disable the application controller 26
9.10.2 Application controller always active 26
9.10.3 Enable/disable event messages 27
9.10.4 Quiescent mode 27
9.10.5 Modes of operation 27
9.11 Memory banks 28
9.11.1 General 28
9.11.2 Memory map 29
9.11.3 Selecting a memory bank location 30
9.11.4 Protectable memory locations 30
9.11.5 Memory bank reading 30
9.11.6 Memory bank writing 32
9.11.7 Memory bank 0 33
9.11.8 Memory bank 1 (optional) 36
9.11.9 Manufacturer-specific memory banks 37
9.11.10 Reserved memory banks 37
9.12 Reset 38
9.12.1 Reset operation 38
9.12.2 Reset memory bank operation 38
9.13 Power on behaviour 38
9.13.1 Power on 38
9.13.2 Power cycle notification 39
9.14 Priority use 39
9.14.1 General 39
9.14.2 Priority of input notifications 39
9.15 Assigning short addresses 40
9.15.1 General 40
9.15.2 Random address allocation 40
9.15.3 Identification of a device 40
9.16 Exception handling 41
9.17 Device capabilities and status information 41
9.17.1 Device capabilities 41
9.17.2 Device status 41
9.17.3 Instance status 42
9.18 Non-volatile memory 42
9.19 Instance types and configuration 42
9.20 Current bus unit configuration 43
10 Declaration of variables 43
11 Definition of commands 45
11.1 General 45
11.2 Overview sheets 45
11.3 Event messages 52
11.3.1 INPUT NOTIFICATION (*device/instance, event*) 52
11.3.2 POWER NOTIFICATION (*device*) 52
11.4 Device control instructions 52
11.4.1 General 52
11.4.2 IDENTIFY DEVICE 52

11.4.3 RESET POWER CYCLE SEEN 53
11.5 Device configuration instructions 53
11.5.1 General 53
11.5.2 RESET 53
11.5.3 RESET MEMORY BANK (*DTR0*) 54
11.5.4 SET SHORT ADDRESS (*DTR0*) 54
11.5.5 ENABLE WRITE MEMORY 54
11.5.6 ENABLE APPLICATION CONTROLLER 54
11.5.7 DISABLE APPLICATION CONTROLLER 54
11.5.8 SET OPERATING MODE (*DTR0*) 54
11.5.9 ADD TO DEVICE GROUPS 0-15 (*DTR2:DTR1*) 55
11.5.10 ADD TO DEVICE GROUPS 16-31 (*DTR2:DTR1*) 55
11.5.11 REMOVE FROM DEVICE GROUPS 0-15 (*DTR2:DTR1*) 55
11.5.12 REMOVE FROM DEVICE GROUPS 16-31 (*DTR2:DTR1*) 55
11.5.13 START QUIESCENT MODE 55
11.5.14 STOP QUIESCENT MODE 55
11.5.15 ENABLE POWER CYCLE NOTIFICATION 55
11.5.16 DISABLE POWER CYCLE NOTIFICATION 55
11.5.17 SET EVENT PRIORITY (*DTR0*) 55
11.6 Device queries 56
11.6.1 General 56
11.6.2 QUERY DEVICE CAPABILITIES 56
11.6.3 QUERY DEVICE STATUS 56
11.6.4 QUERY APPLICATION CONTROLLER ERROR 56
11.6.5 QUERY INPUT DEVICE ERROR 56
11.6.6 QUERY MISSING SHORT ADDRESS 57
11.6.7 QUERY VERSION NUMBER 57
11.6.8 QUERY CONTENT DTR0 57
11.6.9 QUERY NUMBER OF INSTANCES 57
11.6.10 QUERY CONTENT DTR1 57
11.6.11 QUERY CONTENT DTR2 57
11.6.12 QUERY RANDOM ADDRESS (H) 57
11.6.13 QUERY RANDOM ADDRESS (M) 57
11.6.14 QUERY RANDOM ADDRESS (L) 57
11.6.15 READ MEMORY LOCATION (*DTR1, DTR0*) 57
11.6.16 QUERY APPLICATION CONTROLLER ENABLED 58
11.6.17 QUERY OPERATING MODE 58
11.6.18 QUERY MANUFACTURER SPECIFIC MODE 58
11.6.19 QUERY QUIESCENT MODE 58
11.6.20 QUERY DEVICE GROUPS 0-7 58
11.6.21 QUERY DEVICE GROUPS 8-15 58
11.6.22 QUERY DEVICE GROUPS 16-23 58
11.6.23 QUERY DEVICE GROUPS 24-31 58
11.6.24 QUERY POWER CYCLE NOTIFICATION 58
11.6.25 QUERY EXTENDED VERSION NUMBER(*DTR0*) 58
11.6.26 QUERY RESET STATE 59
11.6.27 QUERY APPLICATION CONTROLLER ALWAYS ACTIVE 59
11.6.28 QUERY FEATURE TYPE 59
11.6.29 QUERY NEXT FEATURE TYPE 59

11.6.30 QUERY EVENT PRIORITY 59
11.7 Instance control instructions 59
11.8 Instance configuration instructions 59
11.8.1 General 59
11.8.2 ENABLE INSTANCE 60
11.8.3 DISABLE INSTANCE 60
11.8.4 SET PRIMARY INSTANCE GROUP (*DTR0*) 60
11.8.5 SET INSTANCE GROUP 1 (*DTR0*) 60
11.8.6 SET INSTANCE GROUP 2 (*DTR0*) 60
11.8.7 SET EVENT SCHEME (*DTR0*) 60
11.8.8 SET EVENT PRIORITY (*DTR0*) 61
11.8.9 SET EVENT FILTER (*DTR2:DTR1:DTR0*) 61
11.8.10 SET INSTANCE TYPE (*DTR0*) 61
11.8.11 SET INSTANCE CONFIGURATION (*DTR0, DTR2:DTR1*) 61
11.9 Instance queries 62
11.9.1 General 62
11.9.2 QUERY INSTANCE TYPE 62
11.9.3 QUERY RESOLUTION 62
11.9.4 QUERY INSTANCE ERROR 62
11.9.5 QUERY INSTANCE STATUS 62
11.9.6 QUERY INSTANCE ENABLED 62
11.9.7 QUERY PRIMARY INSTANCE GROUP 62
11.9.8 QUERY INSTANCE GROUP 1 63
11.9.9 QUERY INSTANCE GROUP 2 63
11.9.10 QUERY EVENT SCHEME 63
11.9.11 QUERY INPUT VALUE 63
11.9.12 QUERY INPUT VALUE LATCH 63
11.9.13 QUERY EVENT PRIORITY 63
11.9.14 QUERY FEATURE TYPE 63
11.9.15 QUERY NEXT FEATURE TYPE 64
11.9.16 QUERY EVENT FILTER 0-7 64
11.9.17 QUERY EVENT FILTER 8-15 64
11.9.18 QUERY EVENT FILTER 16-23 64
11.9.19 QUERY INSTANCE CONFIGURATION (*DTR0*) 64
11.9.20 QUERY AVAILABLE INSTANCE TYPES 65
11.10 Special commands 65
11.10.1 General 65
11.10.2 TERMINATE 65
11.10.3 INITIALISE (*device*) 65
11.10.4 RANDOMISE 65
11.10.5 COMPARE 66
11.10.6 WITHDRAW 66
11.10.7 SEARCHADDRH (*data*) 66
11.10.8 SEARCHADDRM (*data*) 66
11.10.9 SEARCHADDRL (*data*) 67
11.10.10 PROGRAM SHORT ADDRESS (*data*) 67
11.10.11 VERIFY SHORT ADDRESS (*data*) 67
11.10.12 QUERY SHORT ADDRESS 67
11.10.13 WRITE MEMORY LOCATION (*DTR1, DTR0, data*) 67

11.10.14 WRITE MEMORY LOCATION – NO REPLY (*DTR1, DTR0, data*) 68
11.10.15 DTR0 (*data*) 68
11.10.16 DTR1 (*data*) 68
11.10.17 DTR2 (*data*) 68
11.10.18 DIRECT WRITE MEMORY (*DTR1, offset, data*) 68
11.10.19 DTR1:DTR0 (*data1, data0*) 68
11.10.20 DTR2:DTR1 (*data2, data1*) 69
11.10.21 SEND TESTFRAME (*data*) 69
Bibliography 70

Figure 1 – IEC 62386 graphical overview 9

Table 1 – 24-bit command frame encoding 16
Table 2 – Instance byte in a command frame 16
Table 3 – 24-bit event message frame encoding 17
Table 4 – Instance types 20
Table 5 – Feature types 21
Table 6 – Instance group variables 21
Table 7 – Device address information in power cycle event 23
Table 8 – Event addressing schemes 23
Table 9 – Measured value (≈ 50 %) versus resolution and "*inputValue*" 25
Table 10 – Example of querying sequence to read a 4-byte input value 25
Table 11 – Memory types 29
Table 12 – Basic memory map of memory banks 29
Table 13 – Memory map of memory bank 0 34
Table 14 – Memory map of memory bank 1 36
Table 15 – Control device capabilities 41
Table 16 – Control device status 42
Table 17 – Instance status 42
Table 18 – Current bus unit configuration 43
Table 19 – Declaration of device variables 44
Table 20 – Declaration of instance variables 45
Table 21 – Instance event messages 45
Table 22 – Device event messages 46
Table 23 – Standard commands 47
Table 24 – Special commands (implemented by both application controller and input device) 51
Table 25 – Device addressing with "INITIALISE (*device*)" 65

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 103: General requirements – Control devices

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62386-103 has been prepared by IEC technical committee 34: Lighting. It is an International Standard.

This second edition cancels and replaces the first edition published in 2014 and Amendment 1:2018. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) the scope has been updated;
b) quiescent mode has been updated;
c) non-volatile memory (NVM) save time has been added, and SAVE PERSISTENT VARIABLES command removed;
d) memory bank 0 has been modified, and common memory bank requirements have been added;

e) IDENTIFY DEVICE has been updated;

f) version number has been changed;

g) bus unit configuration has been added; and

h) instance types and configuration have been added.

The text of this International Standard is based on the following documents:

Draft	Report on voting
34/946/FDIS	34/990/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

This Part 103 of IEC 62386 is intended to be used in conjunction with Part 101, which contains general requirements for the relevant product type (system), and with the appropriate Parts 3xx (particular requirements for control devices) containing clauses to supplement or modify the corresponding clauses in Part 101 and Part 103 in order to provide the relevant requirements for each type of product.

A list of all parts in the IEC 62386 series, published under the general title *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The IEC 62386 series specifies a bus system for control by digital signals of electronic lighting equipment. The IEC 62386-1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices. Part 104 and Part 105 can be applied to control gear or control devices. Part 104 gives requirements for wireless and alternative wired system components. Part 105 describes firmware transfer. Part 150 gives requirements for an auxiliary power supply which can be stand-alone, or built into control gear or control devices.

The IEC 62386-2xx series extends the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The IEC 62386-3xx series extends the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This second edition of IEC 62386-103 is intended to be used in conjunction with IEC 62386-101 and with the various parts that make up the IEC 62386-3xx series of particular requirements for control devices, and can be used together with IEC 62386-102 and with the various parts that make up the IEC 62386-2xx series for control gear. The division into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognised.

The setup of the standards is graphically represented in Figure 1 below.

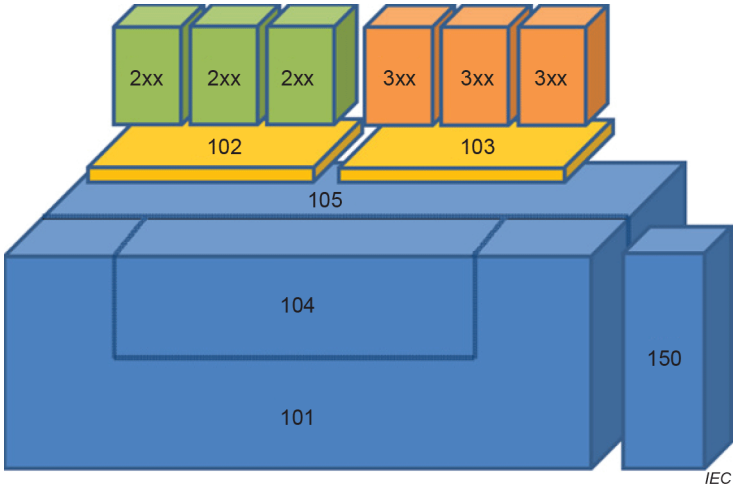


Figure 1 – IEC 62386 graphical overview

When this part of IEC 62386 refers to any of the clauses of the other parts of the IEC 62386-1xx series, the extent to which such a clause is applicable is specified. The other parts also include additional requirements, as necessary.

All numbers used in this document are decimal numbers unless otherwise noted. Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1, "x" in binary numbers means "don't care".

The following typographic expressions are used:

Variables: *variableName* or *variableName[3:0]*, giving only bits 3 to 0 of *variableName*;

Range of values: [lowest, highest];

Command: "COMMAND NAME".

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 103: General requirements – Control devices

1 Scope

This part of IEC 62386 is applicable to control devices for control by digital signals of electronic lighting equipment.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2022, *Digital addressable lighting interface – Part 101: General requirements – System components*

IEC 62386-102:2022, *Digital addressable lighting interface – Part 102: General requirements – Control gear*

IEC 62386-3xx (all parts), Digital addressable lighting interface – Part 3xx: Particular requirements for control devices

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62386-101 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1
broadcast
type of address used to simultaneously address all control devices in the system

3.2
broadcast unaddressed
type of address used to simultaneously address all control devices in the system that have no short address

3.3
device command
command which addresses the control device and has a value of 0xFE in the instance byte of the command frame but is not an event message

3.4
device group
type of address used to address a group of control devices in the system at once

3.5
DTR
data transfer register
multipurpose register used to exchange data

3.6
event
instance report, characterized by its event number, of a change or a defined sequence of changes of its input value

Note 1 to entry: The event number is specific to the type of instance that sends the report.

3.7
event scheme
characterisation of the information, as provided by an instance when producing an event message, that identifies the source of the event

3.8
feature
optional extension at instance and/or device level

3.9
feature command
command which addresses one or more features of an input device or device instance and has a value different from 0xFE in the instance byte of the command frame but is not an instance command or an event message

3.10
GTIN
global trade item number
number used for the unique identification of trade items worldwide

Note 1 to entry: For further information see http://en.wikipedia.org/wiki/GTIN.

Note 2 to entry: The global trade item number is comprised of a GS1 or U.P.C. company prefix followed by an item reference number and a check digit. It is described in the "GS1 General Specifications" (see [1]).

3.11
input signal
physical value that an instance of an input device is designed to detect and process

Note 1 to entry: Examples for physical values are "illuminance" and "button state".

3.12
identification
temporary state used during commissioning that allows the installer to identify particular control devices

3.13
input value
encoded data, representing the input signal

Note 1 to entry: The way in which the input signal is encoded depends on the instance type.

3.14
instance command
command which addresses one or more instances of an input device and has a value different from 0xFE in the instance byte of the command frame but is not a feature command or an event message

3.15
MASK
value with all binary digits set to 1

Note 1 to entry: This means that an 8-bit backward frame of MASK is a value of 0xFF, and a multi-byte memory location of 24 bits containing MASK is a value of 0xFFFFFF.

3.16
NO
answer to a query where no backward frame is sent

Note 1 to entry: If a query is asked where the answer is NO, there will be no response, such that the sender of the query will conclude "no backward frame" following IEC 62386-101:2022, 8.2.5.

Note 2 to entry: The answer NO could also be triggered by a missed query.

3.17
NVM
non-volatile memory
non-volatile read/write memory, the content of which can be changed and will not be lost due to a power cycle

3.18
NVM-RO
NVM that cannot be written using any command

3.19
NVM-RW
NVM that can be modified using one or more commands

3.20
opcode
operation code
that part of a command frame that identifies the command to be executed

3.21
operating mode
set of states identified by a number in the range [0,255], characterised by a collection of variables and memory settings, and used to select a set of functionalities to be exhibited by a control device, including its required reaction to commands

Note 1 to entry: Control devices can support more than one operating mode.

3.22
PING
16-bit forward frame with bits [15:0] equal to 0xAD00

Note 1 to entry: As specified in IEC 62386-102, PING has no meaning for control gear.

3.23
quiescent mode
temporary mode in which the device does not send forward frames

3.24
RAM
volatile read/write memory, the content of which can be changed and will be lost due to a power cycle

3.25
RAM-RO
RAM that cannot be written using any command

3.26
RAM-RW
RAM that can be modified using one or more commands

3.27
random address
random 24-bit number generated by the control device on request during system initialisation

3.28
reset state
state in which all NVM variables of the control device have their reset value, except those that are marked "no change" or are otherwise explicitly excluded

3.29
ROM
non-volatile read-only memory, the content of which is fixed

Note 1 to entry: In this document read-only is meant from a system perspective. A ROM variable may actually be implemented in NVM, but this document does not provide any mechanism to change its value.

3.30
search address
24-bit number used to identify an individual control device in the system during initialisation

3.31
short address
type of address used to address an individual control device in the system

3.32
TMASK
value with the least significant bit set to 0 and all other binary digits set to 1

Note 1 to entry: This means that an 8-bit backward frame of TMASK is a value of 0xFE, and a multi-byte memory location of 24 bits containing TMASK is a value of 0xFFFFFE.

3.33
YES
answer to a query where a backward frame of MASK is sent

4 General

4.1 General

The requirements of IEC 62386-101:2022, Clause 4 apply, with the restrictions, changes and additions identified below.

4.2 Version number

This subclause replaces IEC 62386-101:2022, 4.2.