IEC 62386-304

Edition 1.1 2024-04
CONSOLIDATED VERSION

INTERNATIONAL STANDARD

colour inside

Digital addressable lighting interface –
Part 304: Particular requirements – Input devices – Light sensor

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 29.140.50; 29.140.99

ISBN 978-2-8322-8754-5

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 8
2 Normative references 8
3 Terms and definitions 8
4 General 9
4.1 General 9
4.2 Version number 9
4.3 Insulation 9
5 Electrical specification 9
6 Interface power supply 9
7 Transmission protocol structure 10
8 Timing 10
9 Method of operation 10
9.1 General 10
9.2 Instance type 10
9.3 Input signal and value 10
9.4 Events 11
9.4.1 Priority use 11
9.4.2 Bus usage 11
9.4.3 Encoding 11
9.4.4 Event configuration 11
9.4.5 Event generation 12
9.5 Configuring the input device 14
9.5.1 Using the report timer 14
9.5.2 Using the deadtime timer 15
9.5.3 Setting the timers 15
9.5.4 Setting the hysteresis 16
9.5.5 Manual configuration 16
9.6 Exception handling 17
9.6.1 Physical sensor failure 17
9.6.2 Manufacturer specific errors 17
9.6.3 Error value 17
10 Declaration of variables 17
11 Definition of commands 19
11.1 General 19
11.2 Overview sheets 19
11.2.1 General 19
11.2.2 Standard commands 19
11.3 Event messages 19
11.3.1 INPUT NOTIFICATION (*device/instance, event*) 19
11.3.2 POWER NOTIFICATION (*device*) 19
11.4 Device control instructions 19
11.5 Device configuration instructions 19
11.6 Device queries 20
11.7 Instance control instructions 20

11.8 Instance configuration instructions 20
11.8.1 General 20
11.8.2 SET EVENT FILTER (*DTR0*) 20
11.8.3 SET REPORT TIMER (*DTR0*) 20
11.8.4 SET HYSTERESIS (*DTR0*) 20
11.8.5 SET DEADTIME TIMER (*DTR0*) 20
11.8.6 SET HYSTERESIS MIN (*DTR0*) 20
11.9 Instance queries 20
11.9.1 General 20
11.9.2 QUERY DEADTIME TIMER 20
11.9.3 QUERY INSTANCE ERROR 21
11.9.4 QUERY REPORT TIMER 21
11.9.5 QUERY HYSTERESIS 21
11.9.6 QUERY HYSTERESIS MIN 21
11.10 Special commands 21
Bibliography 22

Figure 1 – IEC 62386 graphical overview 6
Figure 2 – Example of ~~*inputValue*~~ measured value changes and resultant hysteresis bands 14

Table 1 – Illuminance level events 11
Table 2 – Event filter 12
Table 3 – Event timer setting 15
Table 4 – Default and reset values for "*hysteresisMin*" 16
Table 5 – "*manualCapabilityInstance3xx*" values 17
Table 6 – "*instanceErrorByte*" values 17
Table 7 – Declaration of device variables 18
Table 8 – Restrictions to instance variables defined in ~~IEC 62386-103:2014 and IEC 62386-103:2014/AMD1:—~~ IEC 62386-103:2022 18
Table 9 – Declaration of instance variables 18
Table 10 – Standard commands 19

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 304: Particular requirements – Input devices – Light sensor

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 62386-304 edition 1.1 contains the first edition (2017-05) [documents 34C/1314/FDIS and 34C/1334/RVD] and its amendment 1 (2024-04) [documents 34/1014/CDV and 34/1079A/RVC].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 62386-304 has been prepared by subcommittee 34C: Auxiliaries for lamps, of IEC technical committee 34: Lamps and related equipment.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

This Part 304 of IEC 62386 is intended to be used in conjunction with:

- Part 101, which contains general requirements for system components;
- Part 103, which contains general requirements for control devices.

A list of all parts in the IEC 62386 series, published under the general title: *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The *'colour inside'* logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION


IEC 62386 contains several parts, referred to as series. The 1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices.

The 2xx parts extend the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The 3xx parts extend the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This first edition of IEC 62386-304 is intended to be used in conjunction with ~~IEC 62386-101:2014, IEC 62386-101:2014/AMD1:—~~ IEC 62386-101:2022, ~~IEC 62386-103:2014 and IEC 62386-103:2014/AMD1:—~~ IEC 62386-103:2022. The division of IEC 62386 into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognized.

The setup of the standards is graphically represented in Figure 1 below.

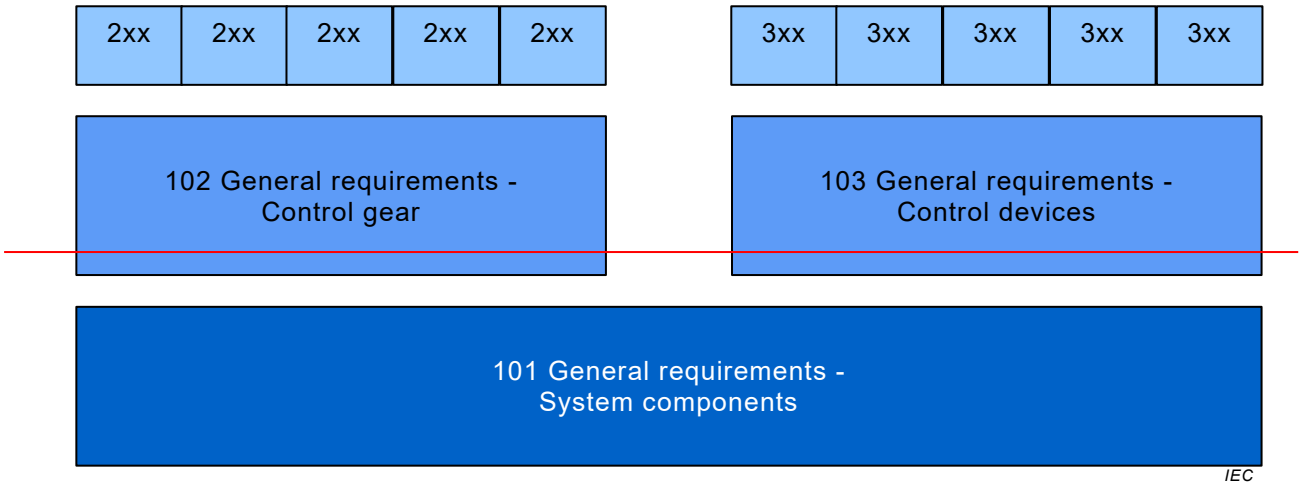

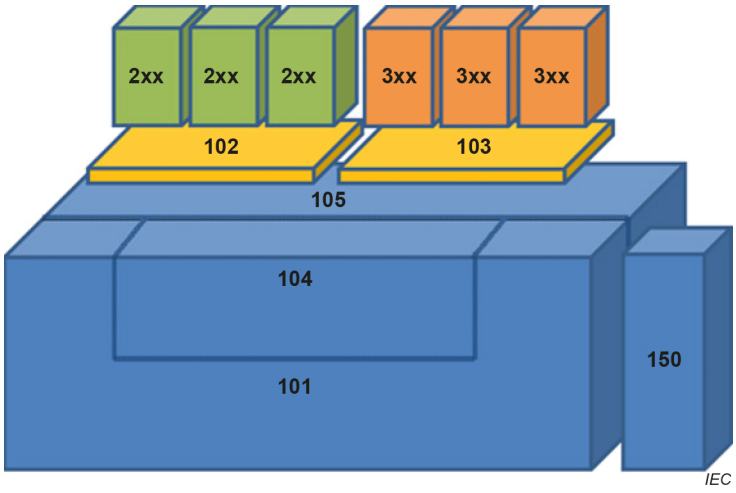


Figure 1 – IEC 62386 graphical overview

This document, and the other parts that make up the IEC 62386-300 series, in referring to any of the clauses of IEC 62386-1XX, specifies the extent to which such a clause is applicable and the order in which the tests are to be performed; the parts also include additional requirements, as necessary.

Where the requirements of any of the clauses of IEC 62386-1XX are referred to in this document by the sentence “The requirements of IEC 62386-1XX, Clause “n” apply”, this sentence is to be interpreted as meaning that all requirements of the clause in question of Part 1XX apply, except any which are clearly inapplicable.

The standardization of the control interface for control devices is intended to achieve compatible co-existence and multi-master operation between electronic control gear and lighting control devices, below the level of building management systems. This document describes a method of implementing light sensors.

All numbers used in this document are decimal numbers unless otherwise noted. Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1; “x” in binary numbers means “don't care”.

The following typographic expressions are used:

Variables: *“variableName”* or *“variableName[3:0]”*, giving only bits 3 to 0 of *“variableName”*.

Time value is expressed in minutes and seconds: mm:ss

Range of values: [lowest, highest]

Command: “COMMAND NAME”

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 304: Particular requirements – Input devices – Light sensor

1 Scope

~~This part of IEC 62386 specifies a bus system for control by digital signals of electronic lighting equipment which is in line with the requirements of IEC 61347, with the addition of DC supplies.~~

~~This document is only applicable to IEC 62386-103:2014 and IEC 62386-103:2014/AMD1:— input devices that deliver illuminance level information to the lighting control system through light level sensing.~~

~~NOTE Requirements for testing individual products during production are not included.~~

This part of IEC 62386 is applicable to input devices that provide illuminance level information to the lighting control system through light level sensing.

This document is only applicable to input devices complying with IEC 62386-103:2022.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:~~2014~~2022, *Digital addressable lighting interface – Part 101: General requirements – System components*
~~IEC 62386-101:2014/AMD1:—[1]~~

IEC 62386-103:~~2014~~2022, *Digital addressable lighting interface – Part 103: General requirements – Control devices*
~~IEC 62386-103:2014/AMD1:—[2]~~

IEC 62386-333:~~—[3]~~2018, *Digital addressable lighting interface – Part 333: Particular requirements for control devices – Manual configuration (feature type 33)*

~~1 Under preparation. Stage at the time of publication: IEC ACDV 62386-101/AMD1:2017.~~

~~2 Under preparation. Stage at the time of publication: IEC ACDV 62386-103/AMD1:2017.~~

~~3 Under preparation. Stage at the time of publication: IEC CCDV 62386-333:2017.~~

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 8
2 Normative references 8
3 Terms and definitions 8
4 General 9
4.1 General 9
4.2 Version number 9
4.3 Insulation 9
5 Electrical specification 9
6 Interface power supply 9
7 Transmission protocol structure 9
8 Timing 9
9 Method of operation 9
9.1 General 9
9.2 Instance type 9
9.3 Input signal and value 9
9.4 Events 10
9.4.1 Priority use 10
9.4.2 Bus usage 10
9.4.3 Encoding 10
9.4.4 Event configuration 11
9.4.5 Event generation 11
9.5 Configuring the input device 13
9.5.1 Using the report timer 13
9.5.2 Using the deadtime timer 13
9.5.3 Setting the timers 13
9.5.4 Setting the hysteresis 14
9.5.5 Manual configuration 15
9.6 Exception handling 15
9.6.1 Physical sensor failure 15
9.6.2 Manufacturer specific errors 15
9.6.3 Error value 15
10 Declaration of variables 16
11 Definition of commands 17
11.1 General 17
11.2 Overview sheets 17
11.2.1 General 17
11.2.2 Standard commands 17
11.3 Event messages 18
11.3.1 INPUT NOTIFICATION (*device/instance, event*) 18
11.3.2 POWER NOTIFICATION (*device*) 18
11.4 Device control instructions 18
11.5 Device configuration instructions 18
11.6 Device queries 18
11.7 Instance control instructions 18

11.8 Instance configuration instructions 18
11.8.1 General 18
11.8.2 SET EVENT FILTER (*DTR0*) 18
11.8.3 SET REPORT TIMER (*DTR0*) 18
11.8.4 SET HYSTERESIS (*DTR0*) 18
11.8.5 SET DEADTIME TIMER (*DTR0*) 18
11.8.6 SET HYSTERESIS MIN (*DTR0*) 19
11.9 Instance queries 19
11.9.1 General 19
11.9.2 QUERY DEADTIME TIMER 19
11.9.3 QUERY INSTANCE ERROR 19
11.9.4 QUERY REPORT TIMER 19
11.9.5 QUERY HYSTERESIS 19
11.9.6 QUERY HYSTERESIS MIN 19
11.10 Special commands 19
Bibliography 20

Figure 1 – IEC 62386 graphical overview 6
Figure 2 – Example of measured value changes and resultant hysteresis bands 13

Table 1 – Illuminance level events 11
Table 2 – Event filter 11
Table 3 – Event timer setting 14
Table 4 – Default and reset values for "*hysteresisMin*" 15
Table 5 – "*manualCapabilityInstance3xx*" values 15
Table 6 – "*instanceErrorByte"* values 16
Table 7 – Declaration of device variables 16
Table 8 – Restrictions to instance variables defined in IEC 62386-103:2022 16
Table 9 – Declaration of instance variables 17
Table 10 – Standard commands 17

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 304: Particular requirements – Input devices – Light sensor

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 62386-304 edition 1.1 contains the first edition (2017-05) [documents 34C/1314/FDIS and 34C/1334/RVD] and its amendment 1 (2024-04) [documents 34/1014/CDV and 34/1079A/RVC].

This Final version does not show where the technical content is modified by amendment 1. A separate Redline version with all changes highlighted is available in this publication.

International Standard IEC 62386-304 has been prepared by subcommittee 34C: Auxiliaries for lamps, of IEC technical committee 34: Lamps and related equipment.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

This Part 304 of IEC 62386 is intended to be used in conjunction with:

- Part 101, which contains general requirements for system components;
- Part 103, which contains general requirements for control devices.

A list of all parts in the IEC 62386 series, published under the general title: *Digital addressable lighting interface*, can be found on the IEC website.

The committee has decided that the contents of this document and its amendment will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The *'colour inside'* logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 62386 contains several parts, referred to as series. The 1xx series includes the basic specifications. Part 101 contains general requirements for system components, Part 102 extends this information with general requirements for control gear and Part 103 extends it further with general requirements for control devices.

The 2xx parts extend the general requirements for control gear with lamp specific extensions (mainly for backward compatibility with Edition 1 of IEC 62386) and with control gear specific features.

The 3xx parts extend the general requirements for control devices with input device specific extensions describing the instance types as well as some common features that can be combined with multiple instance types.

This first edition of IEC 62386-304 is intended to be used in conjunction with IEC 62386-101:2022, IEC 62386-103:2022. The division of IEC 62386 into separately published parts provides for ease of future amendments and revisions. Additional requirements will be added as and when a need for them is recognized.

The setup of the standards is graphically represented in Figure 1 below.

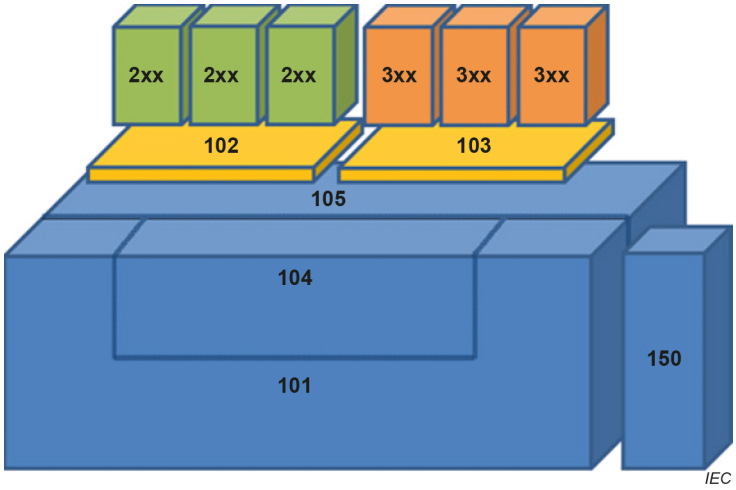


Figure 1 – IEC 62386 graphical overview

This document, and the other parts that make up the IEC 62386-300 series, in referring to any of the clauses of IEC 62386-1XX, specifies the extent to which such a clause is applicable and the order in which the tests are to be performed; the parts also include additional requirements, as necessary.

Where the requirements of any of the clauses of IEC 62386-1XX are referred to in this document by the sentence “The requirements of IEC 62386-1XX, Clause “n” apply”, this sentence is to be interpreted as meaning that all requirements of the clause in question of Part 1XX apply, except any which are clearly inapplicable.

The standardization of the control interface for control devices is intended to achieve compatible co-existence and multi-master operation between electronic control gear and lighting control devices, below the level of building management systems. This document describes a method of implementing light sensors.

All numbers used in this document are decimal numbers unless otherwise noted. Hexadecimal numbers are given in the format 0xVV, where VV is the value. Binary numbers are given in

the format XXXXXXXXb or in the format XXXX XXXX, where X is 0 or 1; “x” in binary numbers means “don't care”.

The following typographic expressions are used:

Variables: *“variableName”* or *“variableName[3:0]”*, giving only bits 3 to 0 of *“variableName”*.

Time value is expressed in minutes and seconds: mm:ss

Range of values: [lowest, highest]

Command: “COMMAND NAME”

DIGITAL ADDRESSABLE LIGHTING INTERFACE –

Part 304: Particular requirements – Input devices – Light sensor

1 Scope

This part of IEC 62386 is applicable to input devices that provide illuminance level information to the lighting control system through light level sensing.

This document is only applicable to input devices complying with IEC 62386-103:2022.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62386-101:2022, *Digital addressable lighting interface – Part 101: General requirements – System components*

IEC 62386-103:2022, *Digital addressable lighting interface – Part 103: General requirements – Control devices*

IEC 62386-333:2018, *Digital addressable lighting interface – Part 333: Particular requirements for control devices – Manual configuration (feature type 33)*