IEC 63171-7

Edition 1.0 2023-05

INTERNATIONAL STANDARD

colour inside

Connectors for electrical and electronic equipment – Part 7: Detail specification for up to 7 ways including PE or FE (data/power) and shield pin, free and fixed circular connectors for balanced single-pair data transmission with current-carrying capacity – Mechanical mating information, pin assignment and additional requirements for type 7

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ICS 31.220.10

ISBN 978-2-8322-7003-5

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

CONTENTS

FOREWORD 5
INTRODUCTION 7
1 Scope 8
2 Normative references 8
3 Terms and definitions 10
4 Technical information 10
4.1 Systems of levels – Compatibility levels, according to IEC 61076-1 10
4.1.1 Performance level 10
4.1.2 Compatibility levels according to IEC 61076 10
4.2 Classification into climatic categories 10
4.3 Clearance and creepage distances 10
4.4 Current-carrying capacity 11
4.5 Marking 11
4.6 Safety aspects 11
5 Dimensional information 11
5.1 General 11
5.2 Codings 11
5.3 Styles 13
5.3.1 Overview 13
5.3.2 Styles 6J-P12C, 6J-M12C and 6J-C12C 14
5.3.3 Styles 6J-P12CI, 6J-M12CI and 6J-C12CI 15
5.3.4 Styles 6P-P12C, 6P-M12C 15
5.3.5 Styles 6P-P12CI and 6P-M12CI 16
5.4 Interface dimensions 16
5.5 Gauges 21
6 Characteristics 22
6.1 General 22
6.2 Pin assignment 22
6.3 Classification into climatic category 23
6.4 Electrical characteristics 24
6.4.1 Creepage and clearance distances 24
6.4.2 Voltage proof 25
6.4.3 Voltage rating 25
6.4.4 Current-temperature derating 26
6.4.5 Current rating 26
6.4.6 Interface contact resistance 26
6.4.7 Input to output DC resistance 26
6.4.8 Input to output DC resistance unbalance 26
6.4.9 Insulation resistance 27
6.4.10 Impedance 27
6.5 Transmission performance 27
6.5.1 General 27
6.5.2 Insertion loss 27
6.5.3 Return loss 27
6.5.4 Propagation delay 27
6.5.5 Transverse conversion loss 27

6.5.6 Transverse conversion transfer loss 27
6.5.7 Transfer impedance 27
6.5.8 Coupling attenuation 27
6.5.9 Power sum alien (exogenous) NEXT 28
6.5.10 Power sum alien (exogenous) FEXT 28
6.6 Mechanical characteristics 28
6.6.1 IP degree of protection 28
6.6.2 Mechanical operation 28
6.6.3 Effectiveness of connector coupling devices 28
6.6.4 Insertion and withdrawal forces 28
6.6.5 Polarizing and keying method 28
6.6.6 Dynamic stress 28
7 Tests and test schedule 28
7.1 General 28
7.2 Mounting of specimens 29
7.2.1 General 29
7.2.2 Arrangement for contact resistance measurement 29
7.2.3 Arrangement for dynamic stress tests 30
7.2.4 Wiring of specimens 30
7.3 Test procedures and measuring methods 30
7.4 Preconditioning 30
7.5 Test schedules 30
7.6 Basic (minimum) test schedule 30
7.7 Full test schedule 30
Annex A (informative) Safety considerations for cord sets made of connectors in accordance with this document 32
Bibliography 33

Figure 1 – Type 7 connector overview 7
Figure 2 – Styles 6J-P12C, 6J-M12C, 6J-C12C overall dimensions 15
Figure 3 – Styles 6J-P12CI, 6J-M12CI and 6J-C12CI overall dimensions 15
Figure 4 – Styles 6P-P12C and 6P-M12C overall dimensions 16
Figure 5 – Styles 6P-P12CI and 6P-M12CI overall dimensions 16
Figure 6 – Mating dimensions for the codings Type I to V and styles with male contacts (at the example of coding Type I) 17
Figure 7 – Dimensions of PE pin for the codings Type I to V and styles with male contacts (at the example of coding Type IV) 18
Figure 8 – Mating dimensions for the codings Type VI and Type VII and styles with male contacts (at the example of coding Type VII) 20
Figure 9 – Mating dimensions for the styles with female contacts (at the example of codings Type I and Type IV) 21
Figure 10 – Gauge dimensions 22
Figure 11 – Pin assignments, front views, Types I and II 22
Figure 12 – Pin assignments, front views, M12, Types III, IV and V 23
Figure 13 – Pin assignments, front views, M12, Types VI and VII 23
Figure 14 – Contact resistance arrangement 29
Figure 15 – Arrangement for vibration and mechanical shock tests 30

Table 1 – Codings 12
Table 2 – Styles 14
Table 3 – Dimensions for Figure 6 and Figure 7 18
Table 4 – Dimensions for Figure 8 20
Table 5 – Dimensions for Figure 9 21
Table 6 – Gauges 22
Table 7 – Pin assignments 23
Table 8 – Climatic category 24
Table 9 – Creepage and clearance distances 24
Table 10 – Voltage proof 25
Table 11 – Voltage ratings 25
Table 12 – Current ratings of connectors 26
Table 13 – Interface contact resistance 26
Table 14 – Insulation resistance 27
Table 15 – Insertion and withdrawal forces 28
Table 16 – Replacement for AP8 in test group AP of IEC 63171 31
Table 17 – Additional tests in test group AP of IEC 63171 31

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

CONNECTORS FOR ELECTRICAL AND ELECTRONIC EQUIPMENT –

Part 7: Detail specification for up to 7 ways including PE or FE (data/power) and shield pin, free and fixed circular connectors for balanced single-pair data transmission with current-carrying capacity – Mechanical mating information, pin assignment and additional requirements for type 7

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 63171-7 has been prepared by subcommittee 48B: Electrical connectors, of IEC technical committee 48: Electrical connectors and mechanical structures for electrical and electronic equipment. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
48B/3033/FDIS	48B/3044/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

A list of all parts in the IEC 63171 series, published under the general title *Connectors for electrical and electronic equipment*, can be found on the IEC website.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

IEC 63171 is the base specification of the whole series. Subsequent specifications do not duplicate information given in the base document, but list only additional requirements. For the complete specification regarding connectors described in this Part of the IEC 63171 series, read this document in conjunction with IEC 63171.

A general overview about the connectors in this document is shown in Figure 1.

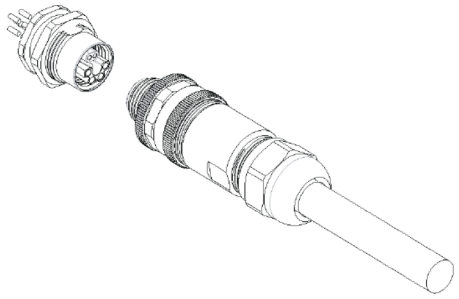
IEC SC 48B – Electrical connectors **Specification available from:** **IEC General secretariat or from the addresses shown on the inside cover.**	**IEC 63171-7 Ed. 1**
DETAIL SPECIFICATION in accordance with IEC 61076-1	M12 screw locking or push-pull locking (or both)
 IEC	Circular connectors, size 12, with 4 up to 7 ways including PE or FE (according to coding) for power and data transmission, either – with M12 screw-locking mechanism (styles with M12 in the name), or – with a quick-locking push-pull mechanism with a size derived from that (styles with P12 in the name), or – with both mechanisms combined (styles with C12 in the name). Multiple mating interfaces, each associated with a coding referred to as "type I" through "type VII", differing by power transmission capabilities and intents. 2 ways + additional shield pin (to be connected to the cable sheath) support balanced differential data transmission with frequencies up to 600 MHz, Category B as per IEC 63171. Free cable connectors: – male or female, – straight connectors, – rewireable or non-rewireable.
 IEC	Fixed connectors: – male or female, – single-hole mounting. With circular mounting orientation

Figure 1 – Type 7 connector overview

CONNECTORS FOR ELECTRICAL AND ELECTRONIC EQUIPMENT –

Part 7: Detail specification for up to 7 ways including PE or FE (data/power) and shield pin, free and fixed circular connectors for balanced single-pair data transmission with current-carrying capacity – Mechanical mating information, pin assignment and additional requirements for type 7

1 Scope

This part of IEC 63171 covers shielded free and fixed circular connectors with 4 ways up to 7 ways for power and data transmission and specifies the common dimensions, mechanical, electrical and transmission characteristics and environmental requirements as well as test specifications respectively.

The connectors described in this document are either equipped with an M12 screw-locking mechanism (styles with M12 in the name) or a quick-locking push-pull mechanism with a size derived from that (styles with P12 in the name) or both mechanisms combined (styles with C12 in the name). For the sake of simplicity, the connectors' size is denoted as "size 12" in this document.

This document provides multiple mating interfaces each of which is associated with a coding preventing the mating of incompatible male and female connectors. These codings are referred to as "Type x", where "x" is represented by a Roman numeral.

For all codings, two ways and the additional shield pin, which is intended to be connected to the cable screen, support differential data transmission with frequencies up to 600 MHz by meeting the requirements of Category B, as defined in IEC 63171.

NOTE 1 Connecting the shield pin to the cable sheath is also required for data transmission with 20 MHz (IEC 63171, Category A).

NOTE 2 The connectors are intended to be used for single-pair Ethernet (SPE) according to the following IEEE Standards: 10BASE-T1 (IEEE 802.3cg), 100BASE-T1 (IEEE 802.3bw), 1000BASE-T1 (IEEE 802.3bp).

NOTE 3 Power over Data line (PoDL) power supply according to IEEE 802.3bu can be optionally used for the two ways intended for data transmission, even in addition to the power supply provided through the dedicated power ways.

The individual codings differ by their power transmission capabilities and intents. The additional ways provide for DC power transmission with up to 63 V/16 A and 600 V/16 A or AC power transmission with rated voltage and rated current up to 600 V/16 A (single-phase) or 480 V/8 A (three-phase). See Table 11 and Table 12 for the voltage and current ratings, and Table 5 for the pin assignments for the individual codings.

Some codings feature a PE pin for safety purposes.

The PE pin needs to be connected to all accessible metal parts.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-581, *International Electrotechnical Vocabulary – Chapter 581: Electromechanical components for electronic equipment*

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 60352 (all parts), *Solderless connections*

IEC 60512-1, *Connectors for electronic equipment – Tests and measurements – Part 1: General*

IEC 60512-1-1, *Connectors for electronic equipment – Tests and measurements – Part 1-1: General examination – Test 1a: Visual examination*

IEC 60512-1-2, *Connectors for electronic equipment – Tests and measurements – Part 1-2: General examination – Test 1b: Examination of dimension and mass*

IEC 60512-2-1, *Connectors for electronic equipment – Tests and measurements – Part 2-1: Electrical continuity and contact resistance tests – Test 2a: Contact resistance – Millivolt level method*

IEC 60512-3-1, *Connectors for electronic equipment – Tests and measurements – Part 3-1: Insulation tests – Test 3a: Insulation resistance*

IEC 60512-4-1, *Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof*

IEC 60512-5-2, *Connectors for electronic equipment – Tests and measurements – Part 5-2: Current-carrying capacity tests – Test 5b: Current-temperature derating*

IEC 60512-11-1, *Connectors for electrical and electronic equipment – Tests and measurements – Part 11-1: Climatic tests – Test 11a: Climatic sequence*

IEC 60512-11-9, *Connectors for electronic equipment – Tests and measurements – Part 11-9: Climatic tests – Test 11i: Dry heat*

IEC 60512-11-10, *Connectors for electronic equipment – Tests and measurements – Part 11-10: Climatic tests – Test 11j: Cold*

IEC 60512-11-12, *Connectors for electronic equipment – Tests and measurements – Part 11-12: Climatic tests – Test 11m: Damp heat, cyclic*

IEC 60512-13-2, *Connectors for electronic equipment – Tests and measurements – Part 13-2: Mechanical operation tests – Test 13b: Insertion and withdrawal forces*

IEC 60512-13-5, *Connectors for electronic equipment – Tests and measurements – Part 13-5: Mechanical operation tests – Test 13e: Polarizing and keying method*

IEC 60512-28-100, *Connectors for electronic equipment – Tests and measurements – Part 28-100: Signal integrity tests up to 1000 MHz on 60603-7 and 61076-3 series connectors – Tests 28a to 28g*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP code)*

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 61076-1:2006, *Connectors for electronic equipment – Product requirements – Part 1: Generic specification*

IEC 61076-3, *Connectors for electronic equipment – Product requirements – Part 3: Sectional specification for rectangular connectors*

IEC 61984:2008, *Connectors – Safety requirements and tests*

IEC TR 63040, *Guidance on clearances and creepage distances in particular for distances equal to or less than 2 mm – Test results of research on influencing parameters*

IEC 63171:2021*, Connectors for Electrical and Electronic Equipment – Shielded or unshielded free and fixed connectors for balanced single-pair data transmission with current carrying capacity; General requirements and tests*

ISO 21920-1:2021, *Geometrical product specifications (GPS) – Surface texture: Profile – Part 1: Indication of surface texture*