IEC 63369-1

Edition 1.0 2026-04

INTERNATIONAL STANDARD

Carbon footprint calculation applicable to industrial lithium-ion batteries - Part 1: General requirements and methodology

ICS 13.020.60

ISBN 978-2-8327-1145-3

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2026 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD 4
1 Scope 6
2 Normative references 6
3 Terms, definitions and abbreviated terms 7
3.1 Terms and definitions 7
3.2 Abbreviated terms 11
4 General information 12
5 Classification of services offered by industrial Li-ion batteries 12
5.1 General 12
5.2 Repetitive energy supply 13
5.2.1 Repetitive energy supply in mobile equipment ("REP-MOB") class 13
5.2.2 Repetitive energy supply in stationary equipment ("REP-STA") class 13
5.3 On-demand energy supply 13
5.3.1 On-demand energy supply in mobile equipment ("OND-MOB") class 13
5.3.2 On-demand energy supply in stationary equipment ("OND-STA") class 14
5.4 Potential combination of service classes 14
6 Functional unit 14
6.1 Functional unit: overview 14
6.2 Functional unit and reference flow for repetitive energy supply (REP-MOB and REP-STA) 17
6.2.1 General 17
6.2.2 Example of REP-MOB load profile – Forklift 18
6.2.3 Example of REP-STA load profile – Battery energy storage system (BESS) 19
6.3 Functional unit and reference flow for on-demand energy supply (OND-MOB and OND-STA) 20
6.3.1 General 20
6.3.2 Example of OND-MOB load profile – Battery system for railway applications 24
6.3.3 Example of OND-STA load profile – UPS application 25
7 Calculation methodology 26
7.1 General 26
7.2 Concept of virtual representative product 26
7.3 Composition of the virtual representative product 27
7.4 Derivation of the virtual representative products 28
7.4.1 General 28
7.4.2 REP-MOB: Example of material handling equipment (forklift) 29
7.4.3 REP-STA: Example of a stationary energy storage battery 29
7.4.4 OND-MOB: Example of a railway battery 29
7.4.5 OND-STA: Example of a battery for uninterruptible power supply duty (UPS) in data centres 30
7.5 System boundaries 31
7.6 Raw material acquisition stage and product manufacturing stage 34
7.7 Distribution 36
7.8 Use stage 37
7.9 End-of-life and recycling stages 37
7.10 Carbon footprint assessment 38

7.11 Limitation 39
7.11.1 General limitations 39
7.11.2 Benchmark limitations 39
8 Electricity modelling 39
8.1 General 39
8.2 Case 1 – Energy supplied from grid, with no consideration of attribute tracking instruments 40
8.3 Case 2 – Electricity supplied from a production asset connected to the energy using plant by means of a direct and dedicated connection 40
8.4 Case 3 – Energy attribute instruments contracted by means of a power purchasing agreement (PPA) entered into with a remote production asset injecting the underlying electrical energy produced into the grid 41
9 Data quality requirements 42
9.1 General 42
9.2 Company-specific datasets 43
9.3 Secondary datasets 45
10 End of life modelling 46
10.1 General 46
10.2 Circular footprint formula (CFF) 46
10.3 Description for each parameter of the CFF 47
10.4 A factor – Unitless 48
10.5 B factor – Unitless 48
10.6 Quality ratios – Unitless: QS_{in} / QP and QS_{out} / QP 48
10.7 Recycled content (R_1) – Unitless 49
10.8 Recycling output rate (R_2) – Unitless 49
10.9 $E_{recycled}$ (E_{rec}) and $E_{recyclingEoL}$ (E_{recEoL}) 51
10.10 E^{Δ}_{v} 51
11 Battery carbon footprint results 52
Annex A (informative) Data source for transportation 53
A.1 General 53
A.2 Sea and fluvial flow 53
A.3 Rail 53
A.4 Air 53
A.5 Road transport 53
Annex B (informative) Content of IEC 63369-2 and IEC 63369-3 (under consideration) 54
B.1 General 54
B.2 IEC 63369-2 content 54
B.3 Intended IEC 63369-3 content 54
Bibliography 55

Figure 1 – Life cycle inventory dataset 10
Figure 2 – Example of REP-MOB load profile for forklift applications 18
Figure 3 – Example of a REP-STA load profile in BESS applications 19
Figure 4 – Example of an OND-MOB load profile in regional train applications 24
Figure 5 – Example of an OND-STA load profile for UPS in data centers 25
Figure 6 – Components of the virtual representative products 28

Figure 7 – System boundaries – Example of a life cycle of a Li-ion battery system 33
Figure 8 – Example of Li-ion battery system cradle-to-gate manufacturing processes 36
Figure 9 – Example of disassembly and recycling processes..... 38
Figure 10 – Typical daily PV generation and load curve..... 41
Figure 11 – Graphical representation of a partially disaggregated dataset 43
Figure 12 – Simplified example of point of substitution when using recycled material in the manufacturing of a product..... 51

Table 1 – Example of a repetitive-cycling functional unit and resulting carbon footprint..... 15
Table 2 – Key aspects used to define the functional unit for REP-MOB 19
Table 3 – Key aspects used to define the Functional Unit for REP-STA..... 20
Table 4 – Example with illustrative values of the on-demand functional unit and resulting carbon footprint..... 22
Table 5 – Key aspects used to define the functional unit for OND-MOB..... 25
Table 6 – Key aspects used to define the functional unit for OND-STA..... 26
Table 7 – Virtual product description for REP-MOB 29
Table 8 – Virtual product description for REP-STA 29
Table 9 – Virtual product description for OND-MOB 30
Table 10 – Virtual product description for OND-STA..... 30
Table 11 – Virtual representative products of the four functionality classes..... 31
Table 12 – Life cycle stages, activities and processes involved 32
Table 13 – BCF calculation indicator 39
Table 14 – Daata quality levels for each data quality criterion 42
Table 15 – Overall data quality level of compliant datasets, according to the achieved DQR 43
Table 16 – How to assign the values to DQR criteria when using company-specific information 45
Table 17 – How to assign the values to DQR criteria when using secondary datasets..... 46

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

Carbon footprint calculation applicable to industrial lithium-ion batteries - Part 1: General requirements and methodology

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC [had/had not] received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 63369-1 has been prepared by subcommittee SC 21A: Secondary cells and batteries containing alkaline or other non-acid electrolytes, of IEC technical committee 21: Secondary cells and batteries. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
21A/948/FDIS	21A/968/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 63369 series, published under the general title *Carbon footprint calculation applicable to industrial lithium-ion batteries*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

– reconfirmed,

– withdrawn, or

– revised.

1 Scope

This part of IEC 63369 addresses general requirements and methodology, whereas intended IEC 63369-2[1] and intended IEC 63369-3[2] address applications of the methodology and default values of the CFF parameters by geographic area (see Annex B).

This document provides a comprehensive methodology for the calculation of carbon footprint of industrial type Li-ion battery from cradle to grave.

NOTE Industrial-type Li-ion battery is described in IEC 62619 or IEC 62620.

Second life and/or usage that was not intended when the battery was put on the market is not taken into account in this document.

This document, along with the other parts of this series, does not apply to batteries for portable, SLI and electric road vehicle traction applications. The definition of the parameters used for the carbon footprint calculation allows for comparability of results for all rechargeable Li-ion chemistries. Classes of representative products are defined in this document to allow comparison inside each class.

This methodology, based on the data provided by the battery manufacturer, is mainly intended to allow a carbon footprint assessment of several battery solutions over the Cumulated Requested Service (CRS). This assessment can be used in the selection process of the battery purchaser.

The methodology can also be used for a variety of purposes such as battery system development, eco-design and participation in voluntary or mandatory programs.

The methodology in this document is based exclusively on attributional life cycle assessment (LCA).

The carbon footprint calculation of charging equipment and power conversion equipment not necessary for battery functions is not covered in this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14021:2016, *Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling)*

---

1 Under consideration.

2 Under consideration.

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

– IEC Electropedia: available at https://www.electropedia.org/

– ISO Online browsing platform: available at https://www.iso.org/obp

3.1.1
primary data
foreground data
company-specific data
quantified value of a process or an activity obtained from a direct measurement, or a calculation based on direct measurements

[SOURCE: ISO 14067:2018, 3.1.6.1, modified – The terms "foreground data" and "company-specific data" have been added, and notes to entry omitted.]

3.1.2
secondary data
background data
data which do not fulfil the requirements for primary data

Note 1 to entry: As an example, secondary data can include data from databases and published literature, default emission factors from national inventories, calculated data, estimates or other representative data, when validated by competent authorities. Further industry average data (e.g., from published production data, government statistics, and industry associations), literature studies, engineering studies and patents, and may also be based on financial data. These industry average contain other generic data can be also considered secondary or background data.

Note 2 to entry: As an example, secondary data can include data obtained from proxy processes or estimates not directly collected, measured, or estimated by the company, but sourced from a third party LCI database or other sources.

Note 3 to entry: As an example, secondary data can include data not originating from a specific process within the supply-chain of the company performing the carbon footprint calculation report.

Note 4 to entry: As an example, secondary data can include primary data that went through a horizontal aggregation step.

Note 5 to entry: Details on secondary data selection is provided in intended IEC 63369-2 (see Annex B).

[SOURCE: ISO 14067:2018, 3.1.6.3, modified – term "background data" added, Note 2 to Note 5 added]

3.1.3
battery system
battery
<of Li-ion> system intended to provide the cumulated requested service as stated by the user which comprises one or more cells, modules or battery packs and all other components needed as per IEC 62619 and IEC 62620

Note 1 to entry: In situations where a single battery system is unable to supply the CRS, multiple battery systems need to be placed sequentially into service. The sum of those battery systems used over time to meet the CRS constitutes the battery system.

Note 2 to entry: See examples of a battery system structure in IEC 62619 or IEC 62620.

Note 3 to entry: The other equipment required to connect to the DC link or power grid such as converters, control and monitoring systems, inductors, application protection devices, etc are not part of the battery system.

3.1.4
battery manufacturer
entity which supplies the battery system(s) to meet the CRS of the application as expressed in the technical specifications from the user

Note 1 to entry: Component manufacturer that does not perform the sizing of the battery system is not defined as the battery manufacturer in this document.

3.1.5
set of conditions
group or collection of ambient and operating conditions present during the use stage

3.1.6
cumulated requested service
CRS
total amount of service requested by the buyer or the end user, expressed in duration (months or years) or delivered energy in kWh or its multiple, under e.g. representative ambient and operating conditions, as expressed in the set

3.1.7
battery system sizing
activity that defines the optimal battery system by taking in account its usage pattern and associated constraints defined by the battery system user

Note 1 to entry: The battery sizing is carried out by the battery system manufacturer and includes replacements if needed to meet the CRS.

3.1.8
battery system sizing result
total number of battery systems requested to provide the full application cumulated requested service, as calculated by the battery system manufacturer

Note 1 to entry: The sizing result is an integer, in case the battery components at the end of the CRS are still capable to provide service for extra time, the remaining part is not to be deducted

3.1.9
component manufacturer
entity which supplies a component of the battery system

Note 1 to entry: The cell or module manufacturer, as component manufacturer, does not perform the battery system sizing.

3.1.10
functionality class
<of battery systems> group of usage pattern of battery that presents similarities in the essential characteristics of the demand placed on the considered battery systems

Note 1 to entry: Only battery systems operating in the same functionality class can be compared in terms of battery carbon footprint.

3.1.11
functional unit
quantified performance, as stated in the end-user specifications, of the cumulated requested service provided by an industrial battery system

[SOURCE: ISO 14040:2006, 3.20, modified – deleted "of a product system for use as a reference unit" and replaced by "as stated in the user specifications, of the service provided by an industrial battery system"]

3.1.12
reference flow
amount of product needed to fulfil the cumulated requested service measured in kg of battery systems over time

Note 1 to entry: This value is expressed in kg of battery system required per kWh of total energy (REP usage) or calendar life (OND usage).

Note 2 to entry: "Reference flow" is a standard wording in LCA. All quantitative input and output data collected in the calculation report are calculated in relation to this reference flow.

3.1.13
input
product, material or energy flow that enters a unit process

Note 1 to entry: Products and materials include raw materials, intermediate products, co-products and releases.

[SOURCE: ISO 14040:2006+A1:2020, 3.21]

3.1.14
output
product, material or energy flow that leaves a unit process

Note 1 to entry: Products and materials include raw materials, intermediate products, co-products and releases.

[SOURCE: ISO 14040:2006+A1:2020, 3.25]

3.1.15
elementary flow
material or energy entering the system being studied that has been drawn from the environment without previous human transformation, or material or energy leaving the system being studied that is released into the environment without subsequent human transformation

[SOURCE: ISO 14040:2006, 3.12]

3.1.16
product flow
products entering from or leaving to another product system

[SOURCE: ISO 14040:2006, 3.27]

3.1.17
load profile
charge and/or discharge cycle providing the energy and power as required by the application to be repeated over time

Note 1 to entry: As an example, a graph showing the variation of electrical discharge load over time, that is repeated multiple times throughout its CSR.

3.1.18
hotspot
top contributing components and processes that together contribute more than 80 % to the carbon footprint

Note 1 to entry: Hotspot is a synonym of most relevant component and process.

Note 2 to entry: Hotspot refers to the battery system under study.

3.1.19
life cycle inventory
LCI
combined set of exchanges of elementary, waste and product flows in a dataset

Note 1 to entry: Note that the acronym LCI in this document refers to 'life cycle inventory' while ISO 14040 and ISO 14044 refer to 'life cycle inventory analysis".

3.1.20
life cycle inventory dataset
LCI dataset
information on elementary, waste and product flows including metadata and evidence pertaining to process, modelling, validation and administrative data

Note 1 to entry: Structure of LCI process dataset is shown on Figure 1.

Note 2 to entry: An LCI process dataset can be a partially or fully aggregated dataset or can be a unit process dataset.

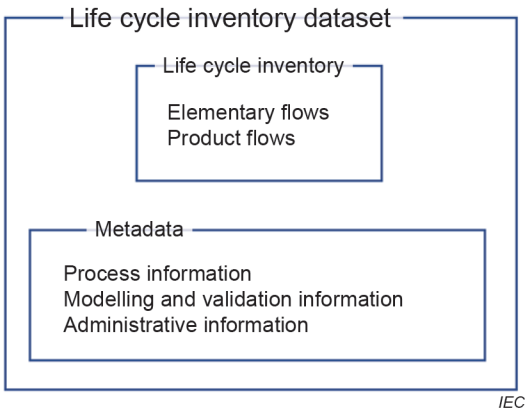


Figure 1 – Life cycle inventory dataset

Note 3 to entry: In this document, LCI dataset covers also LCIA (Life Cycle Impact Assessment) dataset.

3.1.21
compliant dataset
LCI dataset which meets all the LCI dataset requirements in this document, where each data quality indicator is rated to be at least of good quality

Note 1 to entry: A compliant dataset can be a company-specific dataset or a secondary dataset.

Note 2 to entry: The requirements for data quality are listed in Clause 9.

3.1.22
partially disaggregated dataset
dataset with a life cycle inventory that contains elementary flows and activity data, and that only in combination with its complementing underlying datasets yields a complete aggregated LCI data set

3.1.23
aggregated dataset
complete or partial life cycle of a product system that – next to the elementary flows– itemises only the product(s) of the process as reference flow(s) in the input/output list, but no other goods or services

Note 1 to entry: Aggregated datasets are also called 'LCI results' datasets.

3.1.24
point of substitution
point in the value chain where secondary materials substitute primary materials

3.2 Abbreviated terms

ACF	Application carbon footprint
BCF	Battery system carbon footprint (in kg of CO_2 equivalent)
BESS	Battery energy storage system
BOM	Bill of materials
BTMS	Battery thermal management system
CFF	Circular footprint formula
CFP	Carbon footprint of product (in kg of CO_2 equivalent) for components or accessories
CRS	Cumulated requested service
$CO_{2\ eq}$	CO_2 equivalent
DC link	Direct current link
DQR	Data quality rating
EF	Elementary flow
EmF	Emission factor
EOL	End of life
ESS	Energy storage system
FSS	Fire suppression system
FU	Functional unit
GHG	Greenhouse gas
GOO	Guarantee of origin
GWP	Global warming potential
IEA	International energy agency
IPCC	Intergovernmental panel on climate change
LCA	Life cycle assessment
LCI	Life cycle inventory
LFP	Lithium iron phosphate
LMO	Lithium manganese oxide
LTO	Lithium titanium oxide
MOB	Mobile equipment
NMC	Nickel manganese cobalt
OEM	Original equipment manufacturer
OND	Applications with sporadic on-demand energy delivery
PCB	Printed circuit board
PCS	Power conversion system
PE	Polyethylene
PP	Polypropylene
PPA	Power purchase agreement
PV	Photovoltaic
PWB	Printed wiring board