IEC TS 62607-2-5

Edition 1.0 2022-11

TECHNICAL SPECIFICATION

colour inside

Nanomanufacturing – Key control characteristics – Part 2-5: Carbon nanotube materials – Mass density of vertically-aligned carbon nanotubes: X-ray absorption method



IEC TS 62607-2-5:2022-11(en)

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2022 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC TS 62607-2-5

Edition 1.0 2022-11

TECHNICAL SPECIFICATION

colour inside

Nanomanufacturing – Key control characteristics – Part 2-5: Carbon nanotube materials – Mass density of vertically-aligned carbon nanotubes: X-ray absorption method

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ICS 07.030; 07.120

ISBN 978-2-8322-6030-2

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

CONTENTS

FOREWORD 4
INTRODUCTION 6
1 Scope 7
2 Normative references 7
3 Terms, definitions, and abbreviated terms 7
3.1 Terms and definitions 7
3.2 Abbreviated terms 8
4 Measurement of mass density of vertically-aligned carbon nanotubes with X-ray absorption method 8
4.1 General 8
4.2 Measurement principle 8
4.3 Description of measurement equipment and apparatus 9
4.4 Sample preparation 9
4.5 Thickness measurement with X-ray absorption method 9
4.6 Density measurement with X-ray absorption method 10
5 Appropriate data formats 11
Annex A (informative) Case study of mass density measurements for vertically-aligned carbon nanotubes 13
A.1 Overview 13
A.2 Sample preparation for VACNTs 13
A.3 Confirmation of X-ray incidence parallel to the substrate surface 13
A.4 Thickness and mass density measurements with transmitted X-ray intensity profiles 14
A.5 Measurement results for a VACNT film with a thickness of several hundred micrometres 16
A.6 Measurement results for a VACNT film with a thickness of several millimetres 18
Bibliography 20

Figure 1 – Measurement principle of X-ray absorption method 8
Figure 2 – Parameters determining the spatial resolution of X-ray absorption method 9
Figure 3 – Example of X-ray projection image of VACNTs grown on Si substrate 10
Figure 4 – Example of transmitted X-ray intensity profile for VACNT sample 10
Figure 5 – Example of calibration result for non-monochromatic incident X-ray 11
Figure A.1 – Schematic drawings of beam alignment procedures for X-ray absorption measurement 14
Figure A.2 – X-ray projection images and transmitted X-ray intensity profiles observed for two VACNT samples 15
Figure A.3 – Cross-sectional scanning electron microscope images of two VACNT samples 16
Figure A.4 – X-ray projection image and transmitted X-ray intensity profile observed for a thicker VACNT film 17
Figure A.5 – Cross-sectional scanning electron microscope image of a thicker VACNT film 17
Figure A.6 – X-ray projection image and transmitted X-ray intensity profile observed for a millimetre-thick VACNT film 19

Figure A.7 – X-ray projection image and mass density profile observed for a millimetre-thick VACNT film 19

Table 1 – Possible data format to be given together with density of VACNTs obtained with X-ray absorption method 12

Table A.1 – Parameters obtained from the transmitted X-ray intensity profiles for two VACNT samples 16

Table A.2 – Parameters obtained from the transmitted X-ray intensity profile for a thicker VACNT film 17

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

NANOMANUFACTURING – KEY CONTROL CHARACTERISTICS –

Part 2-5: Carbon nanotube materials – Mass density of vertically-aligned carbon nanotubes: X-ray absorption method

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC TS 62607-2-5 has been prepared by IEC technical committee 113: Nanotechnology standardization for electrotechnical products and systems. It is a Technical Specification.

The text of this Technical Specification is based on the following documents:

Draft	Report on voting
113/674/DTS	113/696/RVDTS

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Specification is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 62607 series, published under the general title *Nanomanufacturing – Key control characteristics*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

Vertically-aligned carbon nanotubes (VACNTs) are array structures, in which nanotubes are oriented in the perpendicular direction to a substrate surface. VACNTs are useful in many electronic device applications such as field-emission devices, gas and biological sensors, thermal interface materials, supercapacitors, and so on. Chemical vapour deposition (CVD) is one of the common methods for the synthesis of VACNTs, where CNTs can be grown in the presence of metal catalysts, via thermal decomposition of hydrocarbon sources such as methane, ethylene, acetylene, ethanol, and so on.

Physical (electrical, thermal, etc.) properties of VACNT films really depend on their density, which is reflected by distribution and alignment behaviours of individual CNTs. The mass density of nanotubes in VACNT samples was evaluated in various ways. The first choice is measuring the sample mass gain, which is successively divided by the height and the area of the VACNT samples for obtaining density values. However, this mass gain method is a destructive method, and is effective only if the mass of CNTs can be measured with a microbalance, so that the mass density can be estimated from the mass gain during the CVD growth. The second method is counting the number of CNTs in scanning electron microscope (SEM) or transmission electron microscope (TEM) images. However, this counting method is less reliable when the nanotubes are not grown straight on the substrate and the density is low. Liquid-induced compaction can compact the VACNT samples to a maximum density with wetting or drying process of alcohols. However, these methods are destructive analyses (except for SEM) and are not designed for incorporating the wide distribution in size and alignment of nanotubes observed in realistic VACNT samples. Hence, there is strong demand for the development of new reliable methods for evaluating density in VACNTs.

In this context, an X-ray absorption method is proposed as a standard protocol for evaluating density of VACNTs. X-rays can transmit through the film parallel to the substrate surface, and the transmitted X-rays are detected by a high-resolution X-ray imaging apparatus. The observed X-ray projection images can enable the substrate, VACNT film, and air regions to be identified easily. The film density can be calculated from the measured X-ray transmittance of the film. This method is an effective and versatile technique of nondestructive analysis for VACNT film density.

NANOMANUFACTURING – KEY CONTROL CHARACTERISTICS –

Part 2-5: Carbon nanotube materials – Mass density of vertically-aligned carbon nanotubes: X-ray absorption method

1 Scope

This part of IEC 62607 specifies the protocols for determining the mass density of vertically-aligned carbon nanotubes (VACNTs) by X-ray absorption method. This document outlines experimental procedures, data formats, and some case studies. These protocols are applicable to VACNT films with thickness larger than several tens of micrometres. There are no limitations in materials for substrate.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

There are no normative references in this document.

3 Terms, definitions, and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1.1
carbon nanotube
CNT
nanotube composed of carbon

[SOURCE: ISO/TS 80004-3:2020 [1], 3.3.3, modified – Note 1 to entry has been deleted.]

3.1.2
single-walled carbon nanotube
SWCNT
carbon nanotube consisting of a single cylindrical graphene layer

[SOURCE: ISO/TS 80004-3:2020, 3.3.4, modified – The term "single-wall carbon nanotube" and Note 1 to entry have been deleted.]

3.1.3
multi-walled carbon nanotube
MWCNT
carbon nanotube composed of nested, concentric or near-concentric graphene layers with interlayer distances similar to those of graphite

[SOURCE: ISO/TS 80004-3:2020, 3.3.6, modified – The term "multiwall carbon nanotube" and Note 1 to entry have been deleted.]

3.1.4
vertically-aligned carbon nanotubes
VACNTs
carbon nanotube bundle grown in the perpendicular direction to a substrate surface

3.2 Abbreviated terms

CVD chemical vapour deposition

SEM scanning electron microscope

4 Measurement of mass density of vertically-aligned carbon nanotubes with X-ray absorption method

4.1 General

X-ray is well known for its high penetrating power and has been widely used for nondestructive inspection of various materials. In addition, the absorption (transmission) rate of every element has been extensively studied for a long time and tabulated with very good accuracy. Hence, when the elemental composition of the material is known, the density of the thin film material can be calculated from the measured transmittance of X-rays in a nondestructive way.

4.2 Measurement principle

Figure 1 presents the principle for measuring density of VACNT film by X-ray absorption method. The absorption of X-rays by the VACNT film is expressed as follows: [2][1]

$$I = I_0 \exp\left[-\mu_\rho(E,Z)\rho l\right] \quad (1)$$

where I_0 and I are incident and transmitted X-ray intensity, respectively. μ_ρ is the mass attenuation coefficient of the material , ρ is the mass density of the sample, and l is the path length of X-ray. μ is a physical parameter as a function of the X-ray energy (E) and the elemental composition (Z).

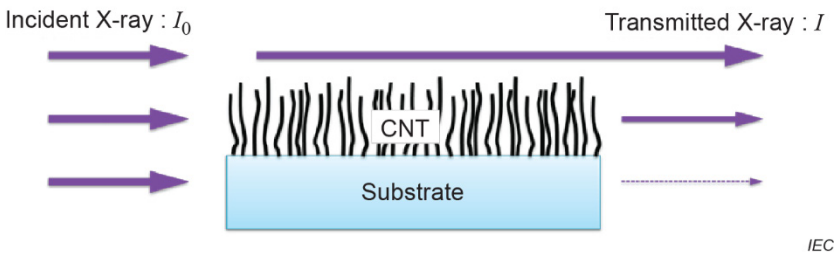


Figure 1 – Measurement principle of X-ray absorption method

[1] Numbers in square brackets refer to the Bibliography.