INTERNATIONAL STANDARD

ISO 15765-4

Fourth edition
2021-07

Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) —

Part 4: Requirements for emissions-related systems

Véhicules routiers — Diagnostic sur gestionnaire de réseau de communication (DoCAN) —

Partie 4: Exigences applicables aux systèmes associés aux émissions

Reference number
ISO 15765-4:2021(E)

© ISO 2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword ..... **v**
Introduction ..... **vi**
1 Scope **1**
2 Normative references **1**
3 Terms and definitions **1**
4 Symbols and abbreviated terms **2**
4.1 Symbols 2
4.2 Abbreviated terms 3
5 Conventions **4**
6 Application **4**
6.1 Vehicle communication initialisation sequence 4
6.1.1 OBDonUDS protocol identification 4
6.1.2 OBDonEDS protocol identification 4
6.1.3 Others 4
6.2 External test equipment communication initialisation sequence 4
6.3 Bit rate validation procedure 5
6.3.1 bitrateRecord 5
6.3.2 Bit rate validation 5
6.3.3 External test equipment error detection provisions 6
6.4 CAN identifier validation procedure 7
6.4.1 CAN identifier validation procedure OBDonEDS 7
6.4.2 CAN identifier validation procedure OBDonUDS 9
6.5 Support of ECUNAME reporting 11
7 Application layer (AL) **11**
8 Session layer (SL) **12**
9 Transport layer (TL) **12**
10 Network layer (NL) **12**
10.1 General 12
10.2 Parameter definitions 12
10.2.1 Timing parameter values 12
10.2.2 Definition of flow control parameter values 13
10.2.3 Maximum number of OBDonUDS or OBDonEDS ECUs 14
10.3 Addressing formats 15
10.3.1 Normal and normal fixed addressing format 15
10.3.2 Functional addressing 15
10.3.3 Physical addressing 15
10.4 CAN identifier requirements 16
10.4.1 External test equipment 16
10.4.2 OBDonUDS or OBDonEDS server/ECU 16
10.5 Mapping of diagnostic addresses 16
10.5.1 OBDonUDS/OBDonEDS CAN identifiers 16
10.5.2 11-bit CAN identifiers 17
10.5.3 29-bit CAN identifiers 18
11 Data link layer (DLL) **18**
12 Physical layer (PHY) **18**
12.1 General 18
12.2 Bit rates 19
12.3 CAN bit timing 19
12.3.1 Parameter values 19

© ISO 2021 – All rights reserved

12.3.2 Nominal bit rate 250 kbit/s 20
12.3.3 Nominal bit rate 500 kbit/s 20
12.4 External test equipment 21
12.4.1 Electrical parameters 21
12.4.2 Cable parameters 24
Bibliography **25**

© ISO 2021 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This fourth edition cancels and replaces the third edition (ISO 15765-4:2016), which has been technically revised.

The main changes compared to the previous edition are as follows:

— changed all time-related parameters to $t_{\text{Parameter_Name}}$;

— corrected all occurrences of ⊣⊨ $P2_{\text{CAN_max}}$ and changed to $\Delta t_{\text{P2_CAN_Client_Max}}$;

— Clause 6 title has been changed to application;

— subclause 6.1 title has been changed to vehicle communication initialisation sequence;

— subclause 6.2 title has been changed to external test equipment communication initialisation sequence;

— changed N_As to $t_{\text{N_As}}$ and changed timeout value to 33 ms;

— changed N_Ar to $t_{\text{N_Ar}}$ and changed timeout value to 33 ms;

— added clarification in 10.3.3 regarding the acceptance of physically addressed request messages.

A list of all parts in the ISO 15765 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2021 – All rights reserved

Introduction

This document has been established in order to define common requirements for vehicle diagnostic systems implemented on a controller area network (CAN) communication link, as specified in ISO 11898-1 and ISO 11898-2. Although primarily intended for diagnostic systems, it also meets requirements from other CAN-based systems needing a network layer protocol.

To achieve this, it is based on the Open Systems Interconnection (OSI) basic reference model specified in ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers.

When mapped on this model, the application protocol and lower OSI layers framework requirements specified/referenced in the ISO 15765 series are structured according to Figure 1.

Figure 1 illustrates a standards-based documentation concept, which consists of the lower OSI layers framework, which specifies requirements related to the transport layer, network layer, data link layer and physical layer standards of the OSI layers 4, 3, 2, and 1.

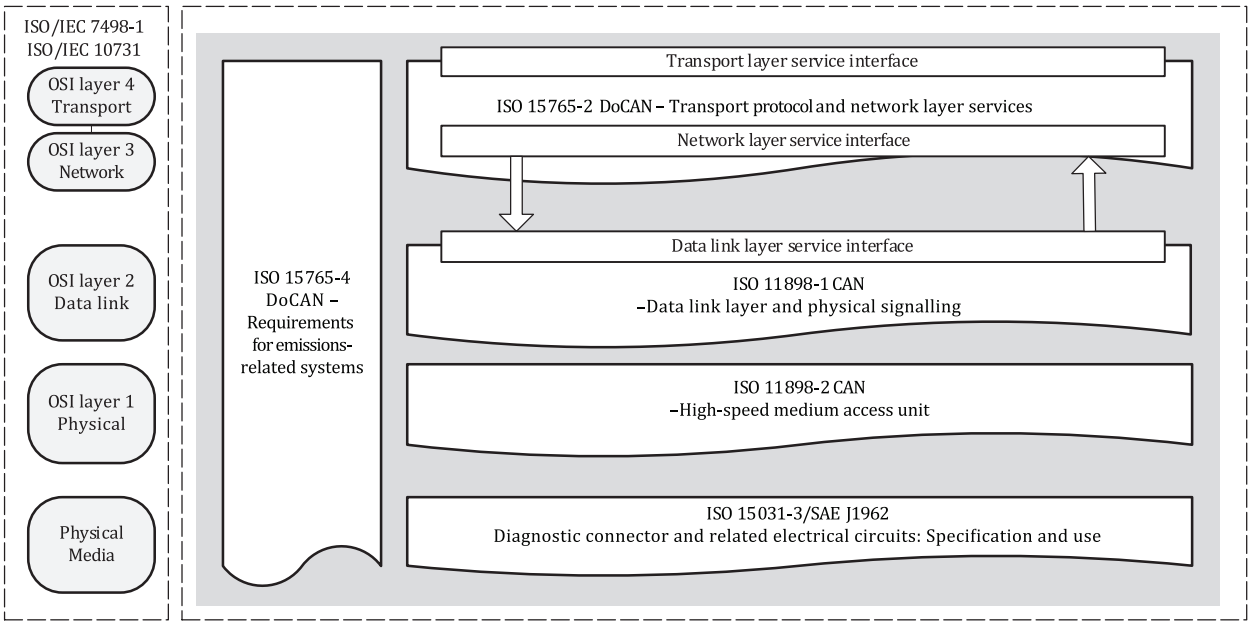


Figure 1 — DoCAN related OSI layers framework

© ISO 2021 – All rights reserved

Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) —

Part 4: Requirements for emissions-related systems

1 Scope

This document specifies requirements for CAN-based communication systems between the in-vehicle network and the diagnostic link connector of the vehicle. This document does not specify any requirements related to the in-vehicle CAN network architecture. This document specifies the requirements to enable the in-vehicle CAN-based communication systems to establish, maintain, and terminate communication with the devices connected to the diagnostic link connector.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology — Open Systems Interconnection — Basic Reference Model: The Basic Model*

ISO 11898-1, *Road vehicles — Controller area network (CAN) — Part 1: Data link layer and physical signalling*

ISO 11898-2, *Road vehicles — Controller area network (CAN) — Part 2: High-speed medium access unit*

ISO 14229-2, *Road vehicles — Unified diagnostic services (UDS) — Part 2: Session layer services*

ISO 15031-3, *Road vehicles — Communication between vehicle and external equipment for emissions-related diagnostics — Part 3: Diagnostic connector and related electrical circuits: Specification and use*

ISO 15765-2, *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) — Part 2: Transport protocol and network layer services*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 7498-1, ISO 11898-1, ISO 11898-2, ISO 15765-2 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at http://www.electropedia.org/

3.1
OBDonEDS
on-board diagnostics on emission diagnostic service
application protocol request and response messages defined in ISO 15031-5/SAE J1979[4] dedicated to the diagnostics of emissions-related systems

© ISO 2021 – All rights reserved

3.2
OBDonUDS
on-board diagnostics on unified diagnostic service
application protocol request and response messages defined in the ISO 14229 series and in ISO 27145-3 or SAE J1979-2[5] dedicated to the diagnostics of emissions-related systems

4 Symbols and abbreviated terms

4.1 Symbols

—	empty table cell or feature undefined
B_S	block size
C_{AC1}, C_{AC2}	capacitance of AC termination
C_{CAN_H}	capacitance between CAN_H and ground potential
C_{CAN_L}	capacitance between CAN_L and ground potential
C_{DIFF}	capacitance between CAN_H and CAN_L
ΔO_F	oscillator frequency tolerance
F_{CF}	consecutive frame
F_{FC}	flow control frame
F_{FF}	first frame
F_{FS}	frame flow status
F_{SF}	single frame
l_{CABLE}	maximum cable length between diagnostic link connector and external test equipment
R_{AC1}, R_{AC2}	resistance of AC termination
t_{BIT}	bit time
t_{BIT_RX}	receive bit time
t_{BIT_TX}	transmit bit time
t_{ETE}	external test equipment CAN interface propagation delay (without external test equipment cable delay)
t_{ETE_CABLE}	external test equipment cable propagation delay (without external test equipment CAN interface delay)
t_{N_Ar}	network layer timeout value (see ISO 15765-2)
t_{N_As}	network layer timeout value (see ISO 15765-2)
t_{N_Br}	network layer timeout value (see ISO 15765-2)
t_{N_Bs}	network layer timeout value (see ISO 15765-2)

© ISO 2021 – All rights reserved