INTERNATIONAL STANDARD

ISO 18300

First edition
2016-11-15

Electrically propelled vehicles — Test specifications for lithium-ion battery systems combined with lead acid battery or capacitor

Véhicules routiers à propulsion électrique — Spécifications d'essai pour les systèmes de batteries aux ions lithium couplées à d'autres types de batterie ou condensateur

Reference number
ISO 18300:2016(E)

© ISO 2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword ..... **iv**
Introduction ..... **v**
1 Scope **1**
2 Normative references **1**
3 Terms and definitions **1**
4 Abbreviated terms **3**
5 Type of connection with lithium-ion battery system **3**
5.1 Lithium-ion battery pack or system combined with lead acid battery (LIPB) 3
5.2 Lithium-ion battery pack or system combined with electric double layer capacitor energy storage system (LICA) 3
6 General requirements **4**
7 Test for LIPB **5**
7.1 Pre-conditioning 5
7.1.1 Purpose 5
7.1.2 Procedure 5
7.2 Rated capacity 5
7.2.1 Purpose 5
7.2.2 Procedure 5
7.3 Micro-cycle test 6
7.3.1 Purpose 6
7.3.2 Micro-cycle without regenerative charging 6
7.3.3 Micro-cycle with regenerative charging 7
7.4 Cycle life test 9
7.4.1 Purpose 9
7.4.2 Procedure 9
7.4.3 Requirement 9
8 Tests for LICA **9**
8.1 Pre-conditioning 9
8.1.1 Purpose 9
8.1.2 Procedure 9
8.2 Micro-cycle with regenerative test 10
8.2.1 Purpose 10
8.2.2 Procedure 10
8.3 Cold cranking power 10
8.3.1 Purpose 10
8.3.2 Procedure 10
8.3.3 Requirement 11
Annex A (informative) **LICA and LIPB** **12**
Bibliography **15**

© ISO 2016 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 37, *Electrically propelled vehicles*.

© ISO 2016 – All rights reserved

Introduction

High-performance on-board electric energy storage is the main obstacle in developing electric vehicles available at more affordable prices. In order to ensure high efficiency and good motion properties, there are many requirements imposed on electrical energy storage sources, such as high power and energy density, long cycle and calendar life, reliability, wide temperature range and no emission of pollutants. The most common energy storages/sources in electric vehicles are electrochemical batteries and electric double layer capacitor. However, installing only one type of energy storage/source could be insufficient to complement each single type drawbacks. Hybridization of the source enables to solve some key problems encountered in electric vehicles such as regenerative braking, while the main source of energy is lithium-ion battery.

Today's hybrid electrical vehicles (HEVs), for example, use rechargeable batteries with gasoline-powered engines to provide power to a vehicle. This system uses the battery as a power buffer to support the engine in order to achieve greater gas mileage. While using a battery in an HEV by itself, the battery is subjected to changes in the amount of power it generates and receives from the load. Since most rechargeable batteries have low-power densities, their life spans are reduced by constant erratic oscillation in demand. A solution to this problem can be dual battery system or two batteries system or combined system with electric double layer capacitor. By using additional energy storage systems, battery performance improvement can be achieved.

The hybrid lithium-ion battery system can supplement the traditional 12V electrical network with a 48V electrical system and components, bridging the gap between low-end hybridization based on present-day 12V start-stop systems. Many hybrids sold will be expected microhybrids, those using start-stop and brake regeneration technologies that operate either with the existing 12V vehicle electric system or with a combined 12V and 48V dual battery/dual voltage electric system. These relatively inexpensive start-stops can provide limited hybrid power assist on launching and also for energy regeneration during braking.

The purpose of this document is the description of such a voltage class A electric system.

© ISO 2016 – All rights reserved

Electrically propelled vehicles — Test specifications for lithium-ion battery systems combined with lead acid battery or capacitor

1 Scope

This document specifies the lithium-ion battery systems combined with lead acid battery or electric double layer capacitor to be used for automotive applications in voltage class A systems. document applies only to combinations of such electric energy storages that are integrated in a common housing.

It specifies configurations, test procedures, and requirements for such combinations.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/TR 8713 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at http://www.electropedia.org/

— ISO Online browsing platform: available at http://www.iso.org/obp

3.1
assistance battery
battery that temporarily supports the main battery

3.2
assistance capacitor
electric double layer capacitor energy storage system that temporarily supports the role of the main battery

3.3
battery
one or more cells fitted with devices necessary for use, for example, case, terminals, marking and protective devices

3.4
battery control unit
BCU
electronic device that controls or manages or measures or calculates electric and thermal functions of the battery system and that provides communication between the battery system and other vehicle controllers

© ISO 2016 – All rights reserved

3.5
capacity
C
total number of ampere-hours that can be withdrawn from a fully charged battery under specified conditions of main battery

3.6
customer
party which is interested to use the battery pack or system and therefore order or perform the test

3.7
device under test
DUT
lithium-ion battery pack or system combined with lead acid battery and capacitor

3.8
electric double layer capacitor
EDLC
device for electrostatic storage of electrical energy achieved by separation of charge in a double layer

3.9
electric double layer capacitor energy storage system
energy storage devices that include capacitors or capacitor assemblies or capacitor packs as well as electrical circuits and electronics

3.10
lithium-ion cell
secondary single cell whose electrical energy is derived from the insertion/extraction reactions of lithium ions between the anode and the cathode

Note 1 to entry: The secondary cell is a basic manufactured unit providing a source of electrical energy by direct conversion of chemical energy. The cell consists of electrodes, separators, electrolyte, container and terminals, and is designed to be charged electrically.

Note 2 to entry: In this document, cell or secondary cell means the secondary lithium-ion cell to be used for the propulsion of electric road vehicles.

3.11
lithium-ion battery pack
battery pack
energy storage device that includes cells or cell assemblies normally connected with cell electronics and overcurrent shut-off device including electrical interconnections and interfaces for external systems

Note 1 to entry: Examples for interfaces are cooling, high voltage, auxiliary low voltage and communication.

3.12
lithium-ion battery system
battery system
energy storage device that includes cells or cell assemblies or battery pack(s) as well as electrical circuits and electronics

EXAMPLE BCU, contactors.

3.13
main battery
lithium-ion battery pack or system that mainly supplies electrical energy continuously

3.14
room temperature
RT
temperature of (25 ± 2) °C

© ISO 2016 – All rights reserved

3.15
micro-cycle
charge and discharge cycle within 60 s

4 Abbreviated terms


LICA Lithium-ion battery pack or system combined with electric double layer capacitor

LIPB Lithium-ion battery pack or system combined with lead acid battery

5 Type of connection with lithium-ion battery system

5.1 Lithium-ion battery pack or system combined with lead acid battery (LIPB)

The lithium-ion battery pack or system combined with lead acid battery (LIPB) is composed of the lithium-ion battery pack or system as main battery and the lead acid battery as assistance battery. The main battery and the assistance battery are connected by mechanical and electrical connecting bars as shown in Figure 1. See also Annex A including Figures A.2, A.3, and A.4 for more detailed information.

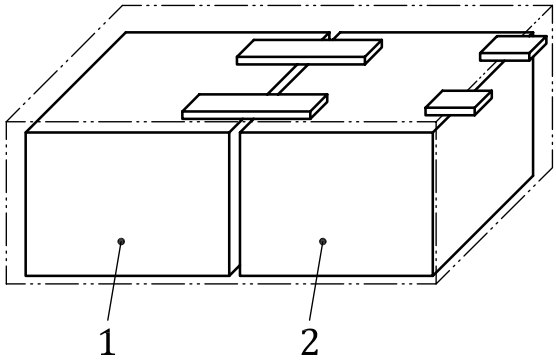

Key

1 main battery (lithium-ion battery system)

2 assistance battery (lead acid battery)

NOTE There are several connection methods possible; the display in this Figure is only schematically.

Figure 1 — Type of configuration of LIPB

5.2 Lithium-ion battery pack or system combined with electric double layer capacitor energy storage system (LICA)

The lithium-ion battery pack or system combined with electric double layer capacitor energy storage system (LICA) is composed of the lithium-ion battery pack or system as main battery and the electric double layer capacitor energy storage system as assistance capacitor. The main battery and the assistance capacitor are connected by mechanical and electrical connecting bars as shown in Figure 2. See also Annex A for more information.

© ISO 2016 – All rights reserved