INTERNATIONAL STANDARD

ISO 19900

Third edition
2019-06

Petroleum and natural gas industries — General requirements for offshore structures

Industries du pétrole et du gaz naturel — Exigences générales relatives aux structures en mer

Reference number
ISO 19900:2019(E)

© ISO 2019



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword ..... **v**

Introduction ..... **vi**

1 Scope **1**

2 Normative references **1**

3 Terms and definitions **2**

4 Symbols and abbreviated terms **8**
4.1 Symbols 8
4.2 Abbreviated terms 9

5 Fundamental requirements **9**
5.1 General 9
5.2 Structural integrity requirements 10
5.3 Functional requirements 10
5.4 Requirements for specific phases of the life of the structure 11
5.4.1 Planning 11
5.4.2 Construction and deployment 11
5.4.3 Structural integrity management 11
5.4.4 Decommissioning and removal 11
5.5 Requirements for durability and robustness 12
5.5.1 Durability, maintenance and inspection 12
5.5.2 Robustness 12

6 Basis for design/assessment **13**
6.1 General 13
6.2 Platform location and orientation 13
6.3 Physical environmental conditions 14
6.4 Geotechnical and geophysical conditions 14
6.4.1 Marine site investigations 14
6.4.2 Seabed instability 15
6.4.3 Seabed disturbance 15
6.5 Specific design/assessment requirements 16
6.5.1 Topsides structures 16
6.5.2 Deck elevation 16
6.5.3 Splash zone 17
6.5.4 Stationkeeping systems 17
6.5.5 Conductor and riser systems 17
6.5.6 Foundations and anchoring 17
6.5.7 Additional operational requirements 18

7 Development of design/assessment situations **18**
7.1 Hazards 18
7.2 Hazardous events 18
7.3 Exposure levels 19
7.3.1 General 19
7.3.2 Exposure level L1 20
7.3.3 Exposure level L2 20
7.3.4 Exposure level L3 20
7.4 Design/assessment situations 21
7.4.1 General 21
7.4.2 Operational design/assessment situations 21
7.4.3 Extreme design/assessment situations 22
7.4.4 Abnormal design/assessment situations 22
7.4.5 Accidental design/assessment situations 23
7.4.6 Short duration design/assessment situations 23
7.4.7 Serviceability design/assessment situations 24

© ISO 2019 – All rights reserved

8 Limit state verification **24**
8.1 General 24
8.2 Basic variables and representative values 25
8.3 Limit states 26
8.3.1 Categories of limit states 26
8.3.2 Ultimate limit states 26
8.3.3 Abnormal/accidental limit states 27
8.3.4 Serviceability limit states 27
8.3.5 Fatigue limit states 27
8.4 Limit state verification procedure 28

9 Actions **28**
9.1 Classifications of actions 28
9.2 Permanent actions and their representative values 29
9.3 Operational actions and their representative values 29
9.4 Environmental actions and their representative values 30
9.5 Accidental actions and their representative values 31
9.6 Repetitive actions 31

10 Design values and partial factors **32**
10.1 Design values of actions 32
10.2 Actions acting in combination 32
10.2.1 Principal and companion actions for the same action type 32
10.2.2 Principal and accompanying actions for specific design/assessment situations 33
10.3 Design values of resistance 33
10.3.1 General 33
10.3.2 Design values of materials including soils 33
10.3.3 Design values of geometric variables 34
10.3.4 Uncertainties in analysis models 34
10.4 Partial factors for operational and extreme design/assessment situations 34
10.5 Partial factors for abnormal and accidental design/assessment situations 34
10.6 Partial factors for serviceability design/assessment situations 35
10.7 Partial factors for fatigue design/assessment verification 35
10.8 Probabilistic modelling and analysis 35

11 Models and analysis **35**

12 Quality management **36**
12.1 General 36
12.2 Installation inspection 36
12.3 In-service inspection, maintenance and repair 36
12.4 Records and documentation of design and construction 37
12.4.1 General 37
12.4.2 Calculations 37
12.4.3 Weight and centre of gravity reports 38
12.4.4 Drawings and specifications 38

13 Assessment of existing structures **38**
13.1 General 38
13.2 Condition assessment 39
13.2.1 General 39
13.2.2 Service and operating requirements 39
13.2.3 Environmental conditions 39
13.2.4 Testing, inspection, maintenance and repair history 39
13.3 Action assessment 40
13.4 Resistance assessment 40
13.5 Component and system failure consequences 40
13.6 Mitigation 40

Annex A (informative) **Additional information and guidance** **41**

Bibliography **64**

 © ISO 2019 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 67, *Materials, equipment and offshore structures for petroleum, petrochemical and natural gas industries*, Subcommittee SC 7, *Offshore structures*.

This third edition cancels and replaces the second edition (ISO 19900:2013), which has been technically revised. The main changes compared to the previous edition are as follows:

— Terms and definitions have been updated;

— Design/assessment situations are described, and the process for limit state design/assessment verification has been clarified;

— Contents have been reorganized and many clarifications to provisions have been made;

— Annex A has been reorganized to mirror the numbering of the normative clauses and it has been updated with substantial guidance moved from normative clauses.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2019 – All rights reserved

Introduction

The International Standards on offshore structures prepared by TC 67/SC 7 (i.e. ISO 19900, the ISO 19901 series, ISO 19902, ISO 19903, ISO 19904-1, the ISO 19905 series, ISO 19906) constitute a common basis addressing design requirements and assessments of all types of offshore structures used by the petroleum and natural gas industries worldwide.

NOTE These are sometimes referred to as the ISO 19900 series on offshore structures.

Through their application, the intention is to achieve adequate structural integrity and performance based on reliability levels appropriate for manned and unmanned offshore structures, whatever the nature or combination of the materials used.

Structural integrity is an overall concept comprising: models for describing actions, structural analyses, design rules, safety elements, workmanship, quality management, and national requirements, all of which are mutually dependent. The modification of any of these elements in isolation can cause an imbalance or inconsistency, with possible impact on the reliability inherent in the offshore structure. The implications involved in modifying one element, therefore, need to be considered in relation to all the elements and the overall reliability of the offshore structure.

The International Standards on offshore structures prepared by TC 67/SC 7 are intended to provide latitude in the choice of structural configurations, materials and techniques and to allow for innovative solutions. Sound engineering judgement is, therefore, necessary in the use of these documents.

Figure 1 gives a general indication of the relationships between the International Standards on offshore structures prepared by TC 67/SC 7.

This document, i.e. ISO 19900, follows the principles of ISO 2394 and is the unifying document for International Standards on offshore structures prepared by TC 67/SC 7, which encompass both specific requirements for offshore structures (the ISO 19901 series) and "structure type" documents (ISO 19902, ISO 19903, ISO 19904-1, ISO 19905-1, ISO 19905-3, and ISO 19906).

The ISO 19901 series addresses particular aspects of the design, construction, and operation of offshore structures for the petroleum and natural gas industries. The provisions can be applicable to structures of different types, materials and operating environments.

In addition to the relationships between the "structure type" documents and the ISO 19901 series, there is also some interdependence among the "structure type" documents, in that one can reference another, e.g. ISO 19906 on arctic offshore structures builds upon the requirements of ISO 19902 on fixed steel offshore structures.

In ISO International Standards, the following verbal forms are used:

— "shall" and "shall not" are used to indicate requirements strictly to be followed in order to conform to the document and from which no deviation is permitted;

— "should" and "should not" are used to indicate that, among several possibilities, one is recommended as particularly suitable, without mentioning or excluding others, or that a certain course of action is preferred but not necessarily required, or that (in the negative form) a certain possibility or course of action is deprecated but not prohibited;

— "may" is used to indicate a course of action permissible within the limits of the document;

— "can" and "cannot" are used for statements of possibility and capability, whether material, physical or causal.

Additional information and guidance are given in Annex A, where the clause numbering mirrors the normative clauses to facilitate cross referencing.

© ISO 2019 – All rights reserved

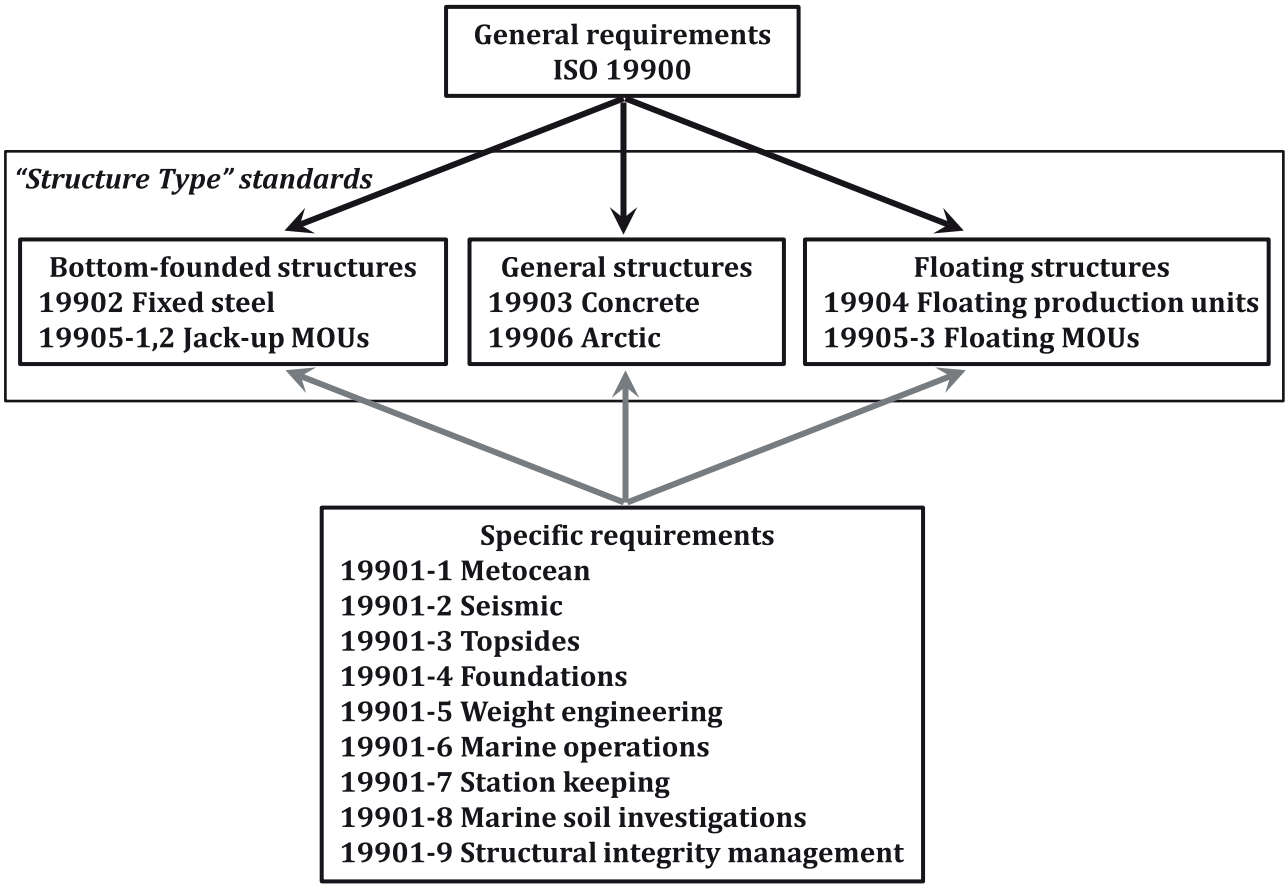


Figure 1 — Relationship of International Standards on offshore structures prepared by TC67/SC7

© ISO 2019 – All rights reserved

Petroleum and natural gas industries — General requirements for offshore structures

1 Scope

This document specifies general requirements and recommendations for the design and assessment of bottom-founded (fixed) and buoyant (floating) offshore structures.

This document is applicable for all phases of the life of the structure, including:

— successive stages of construction (i.e. fabrication, transportation, and installation),

— service in-place, both during design life and during any life extensions, and

— decommissioning, and removal.

This document contains general requirements and recommendations for both the design of new build structures and for the structural integrity management and assessment of existing structures.

This document does not apply to subsea and riser systems or pipeline systems.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19901-1, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 1: Metocean design and operating considerations*

ISO 19901-2, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 2: Seismic design procedures and criteria*

ISO 19901-3, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 3: Topsides structure*

ISO 19901-4, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 4: Geotechnical and foundation design considerations*

ISO 19901-5, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 5: Weight control during engineering and construction*

ISO 19901-6, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 6: Marine operations*

ISO 19901-7, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 7: Stationkeeping systems for floating offshore structures and mobile offshore units*

ISO 19901-8, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 8: Marine soil investigations*

ISO 19901-9, *Petroleum and natural gas industries — Specific requirements for offshore structures — Part 9: Structural integrity management*

ISO 19902, *Petroleum and natural gas industries — Fixed steel offshore structures*

ISO 19903, *Petroleum and natural gas industries — Concrete offshore structures*

© ISO 2019 – All rights reserved

ISO 19904-1, *Petroleum and natural gas industries — Floating offshore structures — Part 1: Monohulls, semisubmersibles and spars*

ISO 19905-1, *Petroleum and natural gas industries — Site-specific assessment of mobile offshore units — Part 1: Jack-ups*

ISO 19905-3, *Petroleum and natural gas industries — Site-specific assessment of mobile offshore units — Part 3: Floating unit*

ISO 19906, *Petroleum and natural gas industries — Arctic offshore structures*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at http://www.electropedia.org/

3.1
abnormal environmental event
environmental *hazardous event* (3.27) having probability of occurrence not greater than 10^{-3} per annum (1 in 1 000 years)

3.2
accidental event
non-environmental *hazardous event* (3.27) having probability of occurrence not greater than 10^{-3} per annum (1 in 1 000 years)

Note 1 to entry: Accidental events, as referred to in this document, are associated with a substantial release of energy, such as vessel collisions, fires, and explosions.

Note 2 to entry: Lesser accidents that could be expected during the life of the structure, such as dropped objects and low energy vessel impact, are termed incidents and are addressed under operational design situations.

3.3
action
external load applied to the *structure* (3.53) (direct action) or an imposed deformation or acceleration (indirect action)

EXAMPLE An imposed deformation can be caused by fabrication tolerances, differential settlement, temperature change or moisture variation. An imposed acceleration can be caused by an earthquake.

3.4
action effect
result of *actions* (3.3) on a *structural component* (3.49) (e.g. internal force, moment, stress, strain) or on the *structure* (3.53) (e.g. deflection, rotation)

3.5
air gap
distance between the highest water elevation and the lowest exposed part of the primary deck *structure* (3.53) not designed to withstand associated environmental *action effects* (3.4) for a defined *return period* (3.42)

Note 1 to entry: This definition can be refined for different platform types in their respective standards.

© ISO 2019 – All rights reserved

3.6
appurtenance
accessory or attachment to the *structure* (3.53) which typically assists installation, provides access or protection, or carries fluids or gas

Note 1 to entry: Appurtenances do not normally contribute to the stiffness of the structure but can attract significant hydrodynamic loading.

EXAMPLE Riser, caisson, boat landing, fender, and protection frames.

3.7
basic variable
variable representing physical quantities which characterize *actions* (3.3) and environmental influences, geometric quantities, or material properties including soil properties

Note 1 to entry: Basic variables are typically uncertain random variables or random processes used in the calculation or assessment of representative values of actions or resistance.

3.8
calibration
process used to determine and optimize partial factors using *structural reliability analysis* (3.52) and target reliabilities

3.9
characteristic value
value assigned to a *basic variable* (3.7) with a prescribed probability

Note 1 to entry: In some design/assessment situations, a variable can have two characteristic values, an upper value and a lower value.

3.10
conductor
tubular pipe set into the ground to provide the initial stable structural foundation for setting the surface casing and protecting the internal well string from metocean actions

Note 1 to entry: The conductor provides lateral and, in some cases, axial support, enables circulation of drilling fluid, and guides the drill string to facilitate setting of the surface casing.

3.11
decommissioning
process of shutting down a *platform* (3.37) enabling preparations for cleaning, dismantling and/or removal from location at the end of *total service life* (3.18)

3.12
design resistance
resistance limit calculated using factored *representative values* (3.40) of *basic variables* (3.7) or from factored expressions based on unfactored *representative values* (3.40) of *basic variables* (3.7)

EXAMPLE Examples of basic variables relevant to resistance are material properties.

3.13
design service life
planned period for which a *structure* (3.53) is used for its intended purpose with anticipated maintenance, but without substantial repair being necessary

3.14
design value
value derived from the *representative value* (3.40) for use in *limit state verification* (3.32)

Note 1 to entry: Design values can be different in different design/assessment situations due to different partial factors.

© ISO 2019 – All rights reserved

3.15
design/assessment criteria
quantitative formulations describing the conditions to be fulfilled for each *design/assessment situation* (3.16)

3.16
design/assessment situation
set of physical conditions for which the *structure* (3.53) or its components are verified

3.17
deterioration
process that adversely affects *structural integrity* (3.50) over time

Note 1 to entry: Deterioration can be caused by naturally occurring chemical, physical, or biological actions including corrosion, by severe environmental actions, by incidents and accidental actions, by repeated actions such as those causing fatigue, by wear due to use, and by improper operation and maintenance of the structure.

3.18
total service life
design service life (3.13) plus any subsequent operational life extension period(s)

3.19
durability
ability of a *structure* (3.53) or *structural component* (3.49) to maintain its function throughout its *total service life* (3.18)

3.20
exposure level
classification system used to establish relevant criteria for a *structure* (3.53) based on consequences of failure

3.21
extreme environmental event
environmental *hazardous event* (3.27) typically having probability of occurrence of 10^{-2} per annum (1 in 100 years)

3.22
fit-for-service
fulfilling defined *structural integrity* (3.50) and *performance* (3.36) requirements

Note 1 to entry: A structure not meeting all the specific provisions can be fit-for-service, provided it does not cause unacceptable risk to life-safety or the environment.

3.23
fitness-for-service assessment
engineering evaluations to demonstrate that a *structure* (3.53) or a *structural component* (3.49) which deviates from its design basis, is *fit-for-service* (3.22)

Note 1 to entry: Deviations can include deterioration or damage, life extension, and other changes and modifications to the structure or to the design basis.

3.24
fixed structure
structure (3.53) that is bottom founded and transfers most of the *actions* (3.3) on it to the *seabed* (3.47)

3.25
floating structure
structure (3.53) where the full weight is supported by buoyancy

© ISO 2019 – All rights reserved

3.26
hazard
potential source of harm

Note 1 to entry: Harm is typically differentiated between harm to people, harm to the environment, or harm in terms of costs to organization(s) or society in general.

3.27
hazardous event
event which occurs when a *hazard* (3.26) interacts with a *structure* (3.53)

EXAMPLE Wave impacting the structure, iceberg impacting the structure, excessive topside weight added to the structure, vessel collision, fire, explosion, and landslip in the vicinity of structural anchors (piles).

3.28
ice gouge
ice scour
incision in the *seabed* (3.47) or removal of seabed material by an ice feature

3.29
incident
non-environmental *hazardous event* (3.27) considered in an operational *design/assessment situation* (3.16)

Note 1 to entry: Incident, as referred to in this document, is a lesser accidental event, associated with possible local damage or damage to structural components, occurring with low probability, most typically associated with probabilities not less than 10^{-2} per annum (1 in 100 years).

3.30
jack-up
mobile offshore unit with a buoyant hull and one or more legs that can be moved up and down relative to the hull

Note 1 to entry: A jack-up reaches its operational mode by lowering the leg(s) to the seabed and then raising the hull to the required elevation. The majority of jack-ups have three or more legs, each of which can be moved independently and which are supported in the seabed by spudcans.

3.31
limit state
state beyond which the *structure* (3.53) or *structural component* (3.49) no longer satisfies the *design/assessment criteria* (3.15)

3.32
limit state verification
demonstration that the total design *action effect* (3.4) in each *design/assessment situation* (3.16) does not exceed the *limit state* (3.31) *design resistance* (3.12)

3.33
nominal value
value assigned to a variable specified or determined on a non-statistical basis, typically from acquired experience or physical conditions, or as published in a recognized code or standard

Note 1 to entry: In some design/assessment situations, a variable can have two nominal values, an upper value and a lower value.

3.34
offshore
situated in water some distance from the shore

Note 1 to entry: Alternatively, near shore can be used to specify locations next to the coast or in mouths of rivers.

© ISO 2019 – All rights reserved

3.35
operator
representative of the company or companies leasing the site

Note 1 to entry: The operator is normally the oil company acting on behalf of co-licensees.

Note 2 to entry: The operator can be termed the owner or the duty holder.

3.36
performance
ability of a *structure* (3.53) or a *structural component* (3.49) to fulfil specified requirements

Note 1 to entry: Specified requirements include requirements for structural integrity and functionality.

3.37
platform
complete assembly of structural and non-structural systems for the purpose of development and production of petroleum and natural gas fields

Note 1 to entry: The platform includes the structure and non-structural systems such as topsides equipment, piping and accommodation.

Note 2 to entry: The platform includes the structural conductors and risers but does not include the non-structural components of the hydrocarbon wells.

Note 3 to entry: The platform does not include the geological strata supporting the foundation. However, site-specific geotechnical parameters provide the boundary conditions necessary to model the platform's foundation or anchoring.

3.38
reference period
period of time used as a basis for determining the *representative value* (3.40) of operational, environmental, accidental and/or repetitive actions

3.39
reliability
performance (3.36) over a specified period of time

Note 1 to entry: When reliability is used in the context of limit states, it can be expressed as the probability that the limit is not exceeded.

Note 2 to entry: The specified period of time is typically one year.

3.40
representative value
value assigned to a *basic variable* (3.7) for verification of a *limit state* (3.31) in a *design/assessment situation* (3.16)

Note 1 to entry: Two types of representative value used in design verification are characteristic value and nominal value.

3.41
resistance
ability of a *structure* (3.53), or a *structural component* (3.49), to withstand *action effects* (3.4)

3.42
return period
average time between occurrences of an event

Note 1 to entry: The offshore industry commonly uses a return period measured in years for environmental events. The return period in years is equal to the reciprocal of the annual probability of occurrence of the event.

© ISO 2019 – All rights reserved

Note 2 to entry: For the purpose of this definition, events include both discrete hazardous events as well as exceedances of a threshold value of a relevant variable.

3.43
riser
part of an offshore pipeline, including any subsea spool pieces, which extends from the *sea floor* (3.46) to the pipeline termination point on a *platform* (3.37)

Note 1 to entry: For fixed structures, the termination point is usually the topsides.

Note 2 to entry: For floating structures, the riser can terminate at other locations on the platform.

3.44
robustness
ability of a *structure* (3.53) to withstand *hazardous events* (3.27) without being damaged to an extent disproportionate to the cause

3.45
scour
removal of *seabed* (3.47) material caused by currents and/or waves

3.46
sea floor
interface between sea and *seabed* (3.47)

3.47
seabed
materials below the *sea floor* (3.46)

3.48
splash zone
part of a *structure* (3.53) that is intermittently exposed to air and immersed in the sea

3.49
structural component
discrete part of a *structure* (3.53)

Note 1 to entry: For this document, a component can include an assembly of components, e.g. a subsystem.

EXAMPLE Examples of components include columns, beams, stiffened plates, tubular members and joints, mooring lines and tendons, gravel fill, foundation anchors and piles, but not the geological strata.

3.50
structural integrity
ability of a *structure* (3.53) or a *structural component* (3.49) to maintain *performance* (3.36) throughout the *total service life* (3.18), with respect to structural safety, *robustness* (3.44), serviceability, and *durability* (3.19)

3.51
structural integrity management
SIM
systematic multi-step cyclic process intended to assure *structural integrity* (3.50) and functionality of a *structure* (3.53) throughout its *total service life* (3.18)

Note 1 to entry: Typical steps include data collection, data evaluation, development of an inspection strategy, development and execution of an inspection programme, and consequent remedial works.

3.52
structural reliability analysis
probabilistic methodology for determining *limit state* (3.31) failure probabilities

© ISO 2019 – All rights reserved

3.53
structure
combination of physically connected *structural components* (3.49)

3.54
topsides
structure (3.53) and equipment placed on a supporting structure [fixed or floating] to provide some or all of a *platform's* (3.37) functions

Note 1 to entry: For a ship-shaped floating structure, the deck is not part of the topsides.

Note 2 to entry: For a jack-up, the hull is not part of the topsides.

Note 3 to entry: A separate fabricated deck or module support frame is part of the topsides.

3.55
ductility
<material> ability of a material to deform and absorb energy beyond its elastic limit

3.56
ductility
<structural component> ability of a *structural component* (3.49) to sustain *action effects* (3.4) beyond yield

3.57
ductility
<structural system> ability of a structural system to deform and dissipate energy, and to redistribute *action effects* (3.4)

4 Symbols and abbreviated terms

4.1 Symbols

A	accidental action
a_d	design value of geometric variable
a_k	characteristic value of geometric variable
a_r	representative value of geometric variable
E	environmental action
F_d	design action
F_r	representative value of an action
f_d	design value of material property (for example strength)
f_r	representative value of material property (for example yield strength)
G	permanent action
L1, L2, L3	exposure levels of structures
P	annual probability of occurrence or probability of exceedance
p_f	probability of failure
Q	operational action

© ISO 2019 – All rights reserved