International Standard

ISO 20304-4

First edition
2026-08

Fine bubble technology — Water treatment applications —

Part 4: Test method for evaluating the antifouling performance of fine bubble water in crossflow membrane filtration systems

Technologie des fines bulles — Traitement de l'eau —

Partie 4: Méthode d'essai pour l'évaluation des performances anti-encrassement de l'eau à fines bulles dans les systèmes de filtration tangentielle sur membrane

Reference number
ISO 20304-4:2026(en)

© ISO 2026



COPYRIGHT PROTECTED DOCUMENT

© ISO 2026

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword ... **iv**

Introduction ... **v**

1 Scope ... **1**

2 Normative references ... **1**

3 Terms and definitions ... **1**
3.1 Terms ... 2

4 Abbreviations ... **3**

5 Principle ... **3**
5.1 General ... 3
5.2 Crossflow membrane fouling index ... 4

6 Apparatus ... **7**
6.1 General ... 7
6.2 Water pump ... 7
6.3 Membrane module ... 7
6.4 Measuring device ... 7
6.5 Data recording and storage device ... 8
6.6 Pressure sensor installed on the membrane loop ... 8
6.7 Pre-membrane pressure sensor ... 8
6.8 Pressure-reducing valve ... 8
6.9 Temperature sensor ... 8
6.10 Water tanks ... 8
6.11 Concentrate container ... 8
6.12 UFB generator ... 8
6.13 Precision electronic balance ... 8

7 Procedure ... **8**
7.1 Equipment setup ... 8
7.2 Data collection ... 9
7.3 Crossflow membrane fouling index calculation ... 10
7.4 Membrane fouling, cleaning, and reuse ... 10

8 Assessment of test results ... **11**

9 Measurement errors ... **11**

10 Test report ... **11**

Annex A (Informative) **Example of test results of the antifouling performance of fine bubble water using ceramic membranes with coking wastewater** ... **13**

Annex B (Informative) **Example of test results of the antifouling performance of fine bubble water using polyvinylidene fluoride hollow fibre membranes with comprehensive wastewater from the entire steel plant** ... **20**

Annex C (Informative) **Example of test results for the antifouling performance of fine bubble water using ceramic membranes with surface water** ... **28**

Annex D (Informative) **Example of test results for the antifouling performance of microbubble water using ceramic membranes with black liquor wastewater** ... **38**

Annex E (Informative) **Example of test results of the antifouling performance of fine bubble water using 47 mm mixed cellulose ester flat-sheet membranes with lens adhesive rinse wastewater** ... **46**

Bibliography ... **53**

© ISO 2026 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC *281*, *Fine bubble technology*.

A list of all parts in the ISO 20304 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user’s national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

© ISO 2026 – All rights reserved

Introduction

Membrane separation processes exhibit high efficiency in removing various impurities from water. Hence, they have been widely employed for pure-water production, reclaimed-water treatment, and industrial wastewater treatment. However, the application of membrane separation technologies is limited by membrane fouling, which directly affects the economic feasibility and sustainability of these technologies. Conventional membrane antifouling techniques include introducing pre-filters, enhancing membrane hydrophilicity, applying surface coatings, and frequent physical and chemical cleaning. However, these approaches often lead to increased operational costs, environmental concerns, and limited effectiveness. In recent years, fine bubble (FB) and ultrafine bubble (UFB) technologies have been demonstrated to considerably reduce membrane fouling. However, there are currently no effective methods to evaluate the efficiency of these technologies for reducing membrane fouling.

The silt density index (SDI), introduced by the American Society for Testing and Materials (ASTM), is a widely used standard for measuring the fouling potential caused by colloidal and suspended particles. However, the SDI has several limitations including a lack of temperature correction, insensitivity to membrane resistance variations, and poor correlation with colloidal or suspended particle concentrations. These shortcomings influence the accuracy and reproducibility, raising concerns about its predictive value. To address these issues, ASTM has proposed a fouling index model based on microfiltration membranes (MFI-0,45), which improves the accuracy of membrane fouling assessments under various operational conditions by considering the filtration mechanism of the cake layer as well as temperature, viscosity, and membrane area.

However, this method employs dead-end filtration, which is unsuitable for water containing FBs. FBs adhere and accumulate on the membrane surface, decreasing the permeate flux, increasing the filtration resistance, and reducing the effective contact area between test water and membranes, causing considerable fluctuations in the assessment results and failure in accurately reflecting the true extent of membrane fouling. Therefore, neither the SDI nor the fouling index model based on dead-end filtration can accurately evaluate the effects of FBs and UFBs on reducing membrane fouling.

In practical reverse osmosis (RO) operations, membranes are typically operated under crossflow conditions, which better mimic real-world operating scenarios and are more suitable than dead-end filtration for evaluating the influence of FBs on reducing membrane fouling. Many researchers have adopted crossflow filtration setups to improve the measurement of fouling indices, such as the membrane fouling index (MFI), thereby demonstrating the feasibility and maturity of the crossflow approach. Building on these advancements, this document improves on traditional approaches by moving away from using fixed reference conditions, such as 0,45 µm membranes and 200 kPa pressure. Instead, it compares the fouling indices under conditions with and without FBs to specifically evaluate the role of bubbles in fouling mitigation.

Using the crossflow filtration mode, the permeate flow through the membrane is quantitatively measured over time, and a crossflow membrane fouling index (CMFI) is established. This testing condition is in good agreement with the actual operation mode of membrane filtration, resulting in a more realistic and accurate reflection of membrane fouling and enhancing the reliability and performance of membrane fouling assessment. Therefore, CMFI is not only suitable for evaluating the effectiveness of FB technology in reducing membrane fouling but also provides valuable guidance for the design and optimization of industrial processes that integrate FB technology with membrane treatment applications.

© ISO 2026 – All rights reserved

Fine bubble technology — Water treatment applications —

Part 4: Test method for evaluating the antifouling performance of fine bubble water in crossflow membrane filtration systems

1 Scope

This document specifies a method for assessing the impact of ultrafine bubbles (UFBs) on membrane antifouling using the crossflow filtration system as the evaluation setup. The evaluation compares the membrane fouling behaviour of the original wastewater (control) with that of the same wastewater after UFB generation under specified operating conditions. This document is applicable to dispersions containing UFBs, including dispersions in which microbubbles (MBs) are present in combination with UFBs.

The method employs the crossflow membrane fouling index (CMFI), measured under constant transmembrane pressure during crossflow filtration as the evaluation criterion.

This method is applicable to various membrane treatment systems including ultrafiltration, nanofiltration, and reverse osmosis and can be used for different types of wastewater containing particulates, colloids, and soluble organic matter.

This method is primarily intended for dispersions containing UFBs (see Annexes A to C and E); however, it is equally applicable, by analogy, to dispersions containing MBs (see Annex D).

This document can guide the design and optimization of industrial processes that integrate FB technologies for enhanced membrane antifouling.

NOTE 1 This method is intended for waters that contain a measurable amount of either particulate matter or colloidal matter, or both. It is not applicable to essentially particle-free waters, such as permeate from reverse osmosis or ultrafiltration systems.

NOTE 2 Users can record supplementary information, e.g., turbidity, total suspended solids, and particle-size distribution; however, such data are not required in this document.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at https://www.electropedia.org/

© ISO 2026 – All rights reserved

3.1 Terms

3.1.1
crossflow
filtration method wherein the feed stream flows tangentially to the membrane surface rather than perpendicular to it

Note 1 to entry: The flow orientation ensures that the fluid on the upstream side of the membrane moves parallel to the membrane surface rather than directly through it.

3.1.2
crossflow membrane fouling index
CMFI
index calculated from the development of filtration velocity through a membrane filter under a crossflow mode

3.1.3
concentrate
stream containing rejected particles and solutes discharged from a membrane module during crossflow filtration

3.1.4
dead-end filtration
filtration method wherein the only exit for the upstream fluid is through the membrane

Note 1 to entry: In this configuration, the feed stream flows perpendicularly to the membrane surface and all the fluid must pass through the membrane to exit the system

3.1.5
flux
throughput of a membrane, typically quantified as the permeate volume produced per unit time and per unit membrane surface area

Note 1 to entry: Flux is commonly expressed in litres per square meter per hour ($L/m^2/h$), and measurements are often standardized at a specific temperature (typically 20 °C).

3.1.6
membrane fouling
undesirable accumulation of substances on a membrane surface or within its pores during filtration processes

Note 1 to entry: This buildup hinders the membrane's performance by reducing its permeability or flux, increasing the system operating pressure and decreasing the membrane separation efficiency.

3.1.7
pore size
size of openings of a porous membrane expressed using either a nominal (average) or an absolute (maximum) value

Note 1 to entry: For microfiltration membranes, the pore size is usually expressed in µm, whereas for ultrafiltration, nanofiltration and reverse-osmosis membranes, it is typically expressed in nm.

3.1.8
transmembrane pressure difference
pressure difference across a membrane, which is the driving force for fluids passing through it

Note 1 to entry: This transmembrane pressure difference allows the membrane to selectively exclude or permit certain substances based on its pore sizes or other specific properties.

3.1.9
feed pressure
pressure applied to the feed side of a membrane in a membrane separation system

© ISO 2026 – All rights reserved

3.1.10
pure-water flow rate
volume of pure water passing through a membrane per unit time under specific conditions

3.1.11
permeate flux
volume of permeate produced per unit membrane area per unit time

Note 1 to entry: Permeate flux is typically expressed in $L/m^2 \cdot h$.

4 Abbreviations

ASTM the American Society for Testing and Materials

CMFI crossflow membrane fouling index

FB fine bubble

MB microbubble

MFI modified fouling index

RO reverse osmosis


UFB ultrafine bubble

5 Principle

5.1 General

In this method, the CMFI is used to assess the effect of FBs on membrane fouling. The CMFI offers an approach that is different from the one offered by the modified fouling index (MFI) established by the ASTM, which determines the fouling potential of the feed water of membrane systems based on a similar principle that involves measuring fluid flow through the membrane filter as a function of time. MFI uses dead-end filtration, as illustrated in Figure 1(A), which is not suitable for evaluating water containing FBs because hydrophobic bubbles accumulate on the membrane surface and adhere to it, reducing its effective filtration area. This leads to inaccurate results; thus, the beneficial effect of UFBs on membrane fouling mitigation cannot be accurately assessed using this method.

In practice, crossflow filtration, as shown in Figure 1(B), is typically used in wastewater treatment to control membrane fouling. Therefore, to accurately evaluate the effect of FBs on fouling mitigation, the assessment method should employ crossflow filtration. The CMFI used in the proposed method addresses this problem and provides a more accurate assessment of membrane fouling.

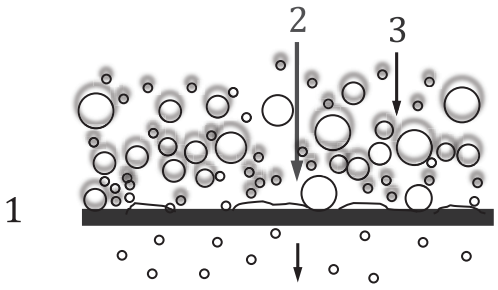

(a)

© ISO 2026 – All rights reserved