ISO/IEC TR 11801-9902

Edition 1.0 2017-06

TECHNICAL REPORT

Information technology – Generic cabling for customer premises – Part 9902: End-to-end link configurations



ISO/IEC TR 11801-9902:2017-06(en)



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2017 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,…). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

ISO/IEC TR 11801-9902

Edition 1.0 2017-06

TECHNICAL REPORT

Information technology – Generic cabling for customer premises – Part 9902: End-to-end link configurations

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 35.200

ISBN 978-2-8322-4486-9

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD 5
INTRODUCTION 6
1 Scope 7
2 Normative references 7
3 Terms, definitions, abbreviated terms and symbols 7
3.1 Terms and definitions 7
3.2 Abbreviated terms 8
3.3 Symbols 8
4 Specifications 9
5 Examples of end-to-end link configurations 10
6 Performance specifications when using end-to-end link limits 11
6.1 General 11
6.2 Worst case limits 12
6.3 Insertion loss limits 13
6.4 Return loss 14
6.5 NEXT limits 16
6.6 PSNEXT limits 17
6.7 ACR-F Limits 18
6.8 PSACR-F 19
6.9 TCL specifications 19
6.10 ELTCTL specifications 20
6.11 Coupling attenuation specifications 20
6.12 DC loop resistance 20
6.13 Propagation delay 21
6.14 Delay skew 21
6.15 DC resistance unbalance within a pair 21
7 E2E link performance 21
7.1 General 21
7.2 Reference performance testing 22
7.3 Installation performance testing 22
7.4 Installation performance testing of E2E links 22
8 Testing of end-to-end links 23
Annex A (informative) CP cords 24
A.1 Specifications for Class D and Class E CP cords 24
A.2 Specifications for Class E_A CP cords 24
A.2.1 General 24
A.2.2 Insertion loss 24
A.2.3 Return loss 24
A.2.4 NEXT 25
A.2.5 PSNEXT 25
A.2.6 ACR-F 25
A.2.7 PSACR-F 25
A.2.8 TCL 26
A.2.9 ELTCTL 26

A.2.10 Propagation delay....26
A.2.11 Delay skew....26
A.2.12 DC resistance unbalance within a pair....26
Bibliography....27

Figure 1 – Symbols for bulkhead connections....9
Figure 2 – One-segment, two-connections, E2E link....10
Figure 3 – Two-segments, three-connections, E2E link....10
Figure 4 – Three-segments, one-connection bulkheads, four-connections, E2E link....10
Figure 5 – Three-segments, six-connections, E2E link....10
Figure 6 – Three-segments, four-connections, E2E link....11
Figure 7 – Three-segments, four-connections, E2E link....11
Figure 8 – Four-segments, five-connections, E2E link....11
Figure 9 – Five-segments, six-connections, E2E link....11
Figure A.1 – One-segment, two-connection, CP cord....24

Table 1 – Worst case Class D E2E link performance at key frequencies....12
Table 2 – Worst case Class E E2E link performance at key frequencies....13
Table 3 – Class D E2E link insertion loss limits....13
Table 4 – Class E E2E link insertion loss limits....14
Table 5 – Class D E2E link return loss limits....14
Table 6 – Class E E2E link return loss limits....15
Table 7 – Class D E2E link NEXT limits....16
Table 8 – Class E E2E link NEXT limits....16
Table 9 – Class D E2E link PSNEXT limits....17
Table 10 – Class E E2E link PSNEXT limits....17
Table 11 – Class D E2E Link ACR-F limits....18
Table 12 –Class E E2E Link ACR-F limits....18
Table 13 – Class D E2E link PSACR-F limits....19
Table 14 – Class E E2E link PSACR-F limits....19
Table 15 – E2E link TCL....19
Table 16 – E2E link segment ELTCTL....20
Table 17 – Minimum E2E link coupling attenuation....20
Table 18 – E2E link segment DC loop resistance....20
Table 19 – E2E link delay....21
Table 20 – E2E link delay skew....21
Table 21 – E2E link DC resistance unbalance....21
Table 22 – Test regime for reference performance and installation performance – Balanced cabling of Classes D to E....23
Table A.1 – Class E_A insertion loss specifications....24
Table A.2 – Class E_A return loss specifications....25

Table A.3 – Class E_A NEXT specifications 25
Table A.4 – Class E_A PSNEXT specifications 25
Table A.5 – Class E_A ACR-F specifications 25
Table A.6 – Class E_A PSACR-F specifications 26
Table A.7 – Class E_A propagation delay specifications 26
Table A.8 – Class E_A delay skew specifications 26
Table A.9 – E2E link DC resistance unbalance 26

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 9902: End-to-end link configurations

FOREWORD

1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees and ISO member bodies.

3) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC National Committees and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.

4) In order to promote international uniformity, IEC National Committees and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO, IEC or ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.

5) ISO and IEC do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. ISO or IEC are not responsible for any services carried out by independent certification bodies.

6) All users should ensure that they have the latest edition of this publication.

7) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC National Committees or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.

8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

9) Attention is drawn to the possibility that some of the elements of this ISO/IEC publication may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

The main task of the joint technical committee is to prepare International Standards. However, the joint technical committee may propose the publication of a Technical Report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

ISO/IEC TR 11801-9902, which is a Technical Report, was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This Technical Report has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The list of all currently available parts of the ISO/IEC 11801 series, under the general title *Information technology — Generic cabling for customer premises*, can be found on the IEC website.

INTRODUCTION

One major difference between a standard generic cabling installation and an industrial cabling as also other application areas of cabling is how it is installed. In these areas it is common practice to deploy cabling channels constructed from one or more cords as described in Annex B and Annex C of ISO/IEC 11801-3:—[1]. In addition, the cords are field terminated rather than pre-terminated into plugs elsewhere. As a result, these cords might have problems associated with the termination process which are not identified during channel verification testing in accordance with ISO/IEC 11801-1 since such testing excludes the free connectors at the end of the channel.

This Technical Report provides definitions for, and examples of, such cabling implementations, described as end-to-end (E2E) links. It also provides performance specifications to support Class D and Class E balanced cabling channels of ISO/IEC 11801-1 which include the impact of the terminating connectors that may be used for performance verification using the test method of ISO/IEC 14763-4.

1 Under preparation. Stage at the time of publication: ISO/IEC FDIS 11801-3:2017.

INFORMATION TECHNOLOGY – GENERIC CABLING FOR CUSTOMER PREMISES –

Part 9902: End-to-end link configurations

1 Scope

This part of ISO/IEC 11801, which is a Technical Report, provides definitions for, and examples of, cabling implementations described as end-to-end (E2E) links.

In addition, this document provides performance specifications to support Class D and Class E balanced cabling channels of ISO/IEC 11801-1. These specifications amend those channel specifications of ISO/IEC 11801-1 by including the impact of the free connectors in accordance with the interfaces specified in ISO/IEC 11801-3 used to terminate the E2E link.

Test methods are provided in ISO/IEC 14763-4.

End-to-end link configurations can include any type of connection.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 11801-1[2], *Information technology – Generic cabling for customer premises – Part 1: General requirements*

ISO/IEC 11801-3[3], *Information technology – Generic cabling for customer premises – Part 3: Industrial premises*

ISO/IEC 14763-4[4], *Information technology – Implementation and operation of customer premises cabling – Part 4: Measurement of end-to-end (E2E)-links*

3 Terms, definitions, abbreviated terms and symbols

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 11801-1, ISO/IEC 11801-3 and the following apply.

---

2 Under preparation. Stage at the time of publication: ISO/IEC FDIS 11801-1:2017.

3 Under preparation. Stage at the time of publication: ISO/IEC FDIS 11801-3:2017.

4 Under preparation. Stage at the time of publication: ISO/IEC CDV 14763-4:2017.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

3.1.1
end-to-end link
end-to-end transmission path formed by structured cabling based on passive components including the portion of the end connection that is attached to the link and the portion of the end connection that is attached to the end equipment

3.1.2
fixed connector
connector for attachment to a rigid surface

3.1.3
free connector
connector for attachment to a free end

3.1.4
bulkhead connection
connection that serves as an interconnection point located through an enclosure wall

3.1.5
segment
cabling between connectors of an end-to-end link

3.2 Abbreviated terms

For the purposes of this document, the abbreviations given in ISO/IEC 11801-1, ISO/IEC 11801-3 and the following apply.

B bulkhead connection

C connection

CP consolidation point

E2E end-to-end


ffs for further study

L1 length of E2E-link

TI test interface

3.3 Symbols

For the purposes of this document, the symbols given in ISO/IEC 11801-1, ISO/IEC 11801-3 and the following apply.

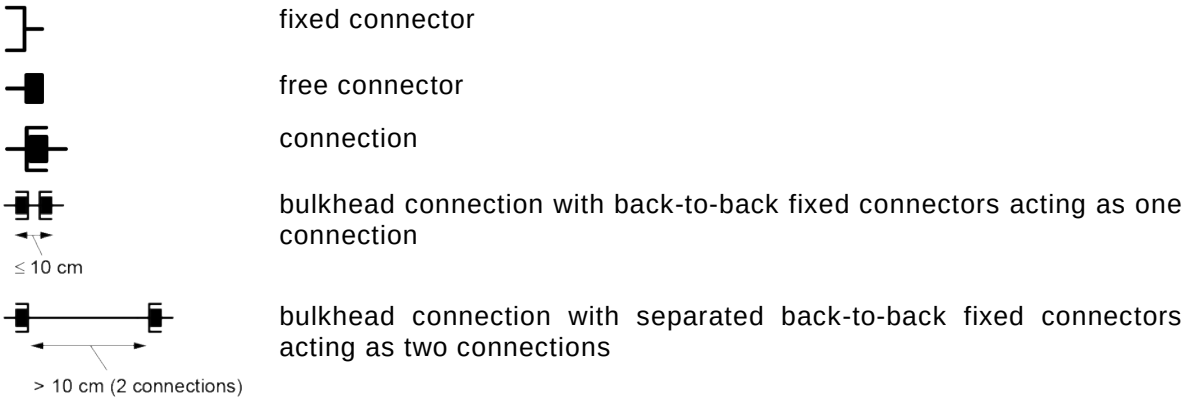

The symbols shown in Figure 1 define the number of connections in all E2E links.

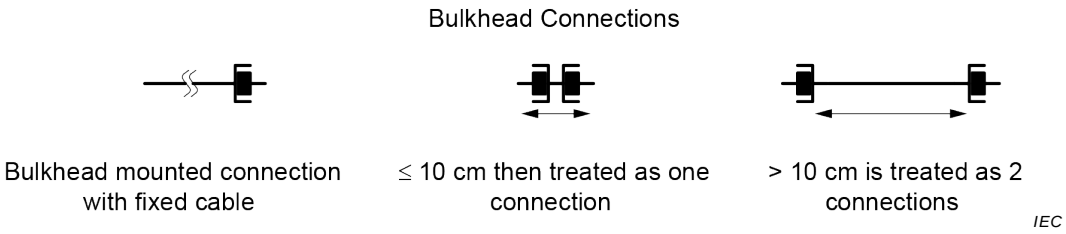


Figure 1 – Symbols for bulkhead connections

NOTE Bulkhead mounted connections with fixed cable can have a variable length to accommodate the installation with in the cabinet.

Bulkhead connector assemblies can consist of one plug jack assembly with a cable attached or two back-to-back jacks meeting the distance specifications defined by IEC 61918 for a specific transmission class.

4 Specifications

The specifications for an end-to-end link include the following.

a) The configurations and structure should meet the specifications outlined in Clause 5.

b) The interfaces to the cabling should meet the specifications of ISO/IEC 11801-1 or ISO/IEC 11801-3 with respect to mating interfaces and performance.

c) Connecting hardware at other places in the cabling structure should meet the performance specifications specified in ISO/IEC 11801-1.

d) Installation should be performed in accordance with IEC 61918 and ISO/IEC 14763-2.

e) The E2E links should meet the specifications of Clause 6.

f) Performance testing to the specifications of Clause 6 should be used to provide assurance of installed cabling to determine its capacity to support the applications described by IEC 61918 and ISO/IEC 11801-1.

g) The performance of end-to-end link as specified in Clause 6 should support the channel specifications specified in ISO/IEC 11801-1. Performance can be achieved by one of the following when the additional connections are included in the test results:

   1) an E2E link design and implementation ensuring that the prescribed transmission performance is met;

   2) attachment of appropriate components to a permanent link or CP link meeting the prescribed performance class of ISO/IEC 11801-1;