FITNESS-FOR-SERVICE

API 579-1/ASME FFS-1, December 2021

AN INTERNATIONAL CODE

American Petroleum Institute

The American Society of Mechanical Engineers

[Intentionally Left Blank]

All rights reserved. No part of this work may be reproduced, stored in a retrieval system, or transmitted by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission from the publisher.
Contact the Publisher, API Publishing Services, 1220 L Street, N.W., Washington, D.C. 20005.

Copyright © 2021 by the American Petroleum Institute and The American Society of Mechanical Engineers

ISBN 978-0-7918-7449-3

[Intentionally Left Blank]

CONTENTS

FOREWORD ..... **XXIX**

SPECIAL NOTES ..... **XXXI**

SUMMARY OF CHANGES ..... **XXXIII**

PART 1 – INTRODUCTION **1-1**

1.1 INTRODUCTION 1-1
1.1.1 Construction Codes and Fitness-For-Service *1-1*
1.1.2 Fitness-For-Service Definition *1-1*
1.2 SCOPE 1-2
1.2.1 Supplement to In-Service Inspection Codes *1-2*
1.2.2 Application Construction Codes *1-2*
1.2.3 Other Recognized Codes and Standards *1-2*
1.2.4 Remaining Life *1-3*
1.2.5 Assessment Methods for Flaw Types and Damage Conditions *1-3*
1.2.6 Special Cases *1-3*
1.3 ORGANIZATION AND USE 1-4
1.4 RESPONSIBILITIES 1-4
1.4.1 Owner-User *1-4*
1.4.2 Inspector *1-4*
1.4.3 Engineer *1-4*
1.4.4 Plant Engineer *1-5*
1.5 QUALIFICATIONS 1-5
1.5.1 Education and Experience *1-5*
1.5.2 Owner-User *1-5*
1.5.3 Inspector *1-5*
1.5.4 Engineer *1-6*
1.6 DEFINITION OF TERMS 1-6
1.7 REFERENCES 1-6
1.7.1 Types *1-6*
1.7.2 Code, Standards and Recommended Practices *1-6*
1.7.3 Technical reports and Other Publications *1-6*
1.8 TABLES 1-7

ANNEX 1A – GLOSSARY OF TERMS AND DEFINITIONS **1A-1**

PART 2 – FITNESS-FOR-SERVICE ENGINEERING ASSESSMENT PROCEDURE **2-1**

2.1 GENERAL 2-1
2.1.1 Fitness-For-Service and Continued Operation *2-1*
2.1.2 Organization by Flaw Type and Damage Mechanism *2-2*
2.1.3 FFS Assessment Procedure *2-2*
2.2 APPLICABILITY AND LIMITATIONS OF THE FFS ASSESSMENT PROCEDURES 2-3
2.2.1 FFS Procedures for Pressurized or Unpressurized Components *2-3*
2.2.2 Component Definition *2-3*
2.2.3 Construction Codes *2-3*

2.2.4 Specific Applicability and Limitations *2-3*
2.3 DATA REQUIREMENTS 2-4
2.3.1 Original Equipment Design Data *2-4*
2.3.2 Maintenance and Operational History *2-5*
2.3.3 Required Data/Measurements for an FFS Assessment *2-6*
2.3.4 Recommendations for Inspection Technique and Sizing Requirements *2-6*
2.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 2-6
2.4.1 Assessment Levels *2-6*
2.4.2 FFS Acceptance Criteria *2-7*
2.4.3 Data Uncertainties *2-8*
2.5 REMAINING LIFE ASSESSMENT 2-9
2.5.1 Remaining Life *2-9*
2.5.2 Guidance on Remaining Life Determination *2-10*
2.6 REMEDIATION 2-10
2.6.1 Requirements for Remediation *2-10*
2.6.2 Guidelines for Remediation *2-10*
2.7 IN-SERVICE MONITORING 2-10
2.8 DOCUMENTATION 2-11
2.8.1 General *2-11*
2.8.2 Applicability and Limitations *2-11*
2.8.3 Data Requirements *2-11*
2.8.4 Assessment Techniques and Acceptance Criteria *2-11*
2.8.5 Remaining Life Assessment *2-12*
2.8.6 Remediation Methods *2-12*
2.8.7 In-Service Monitoring *2-12*
2.8.8 Retention *2-12*
2.9 NOMENCLATURE 2-12
2.10 REFERENCES 2-13
2.11 TABLES 2-14
2.12 FIGURES 2-16

ANNEX 2A – TECHNICAL BASIS AND VALIDATION – FITNESS-FOR-SERVICE ENGINEERING ASSESSMENT PROCEDURE 2A-1

2A.1 TECHNICAL BASIS AND VALIDATION 2A-1
2A.2 REFERENCES 2A-1

ANNEX 2B – DAMAGE MECHANISMS 2B-1

2B.1 DETERIORATION AND FAILURE MODES 2B-1
2B.2 FFS ASSESSMENT AND THE IDENTIFICATION OF DAMAGE MECHANISMS 2B-1
2B.3 PRE-SERVICE DEFICIENCIES 2B-2
2B.3.1 Types of Pre-Service Deficiencies *2B-2*
2B.3.2 In-Service Inspection *2B-2*
2B.4 IN-SERVICE DETERIORATION AND DAMAGE 2B-2
2B.4.1 Overview *2B-2*
2B.4.2 General Metal Loss Due to Corrosion and/or Erosion *2B-3*
2B.4.3 Localized Metal Loss Due to Corrosion and/or Erosion *2B-3*
2B.4.4 Surface Connected Cracking *2B-4*
2B.4.5 Subsurface Cracking and Microfissuring/Microvoid Formation *2B-5*
2B.4.6 Metallurgical Changes *2B-6*

2B.5 REFERENCES 2B-7
2B.6 TABLES 2B-8

ANNEX 2C – THICKNESS, MAWP AND STRESS EQUATIONS FOR AN FFS ASSESSMENT 2C-1

2C.1 GENERAL 2C-2
2C.1.1 Scope 2C-2
2C.1.2 MAWP and MFH 2C-2
2C.1.3 Construction Codes and Common Rules 2C-2
2C.1.4 Use of VIII-2 Design Equations 2C-3
2C.2 CALCULATION OF T_{MIN}, MAWP (MFH), AND MEMBRANE STRESS 2C-3
2C.2.1 Overview 2C-3
2C.2.2 Minimum Required Wall Thickness and MAWP (MFH) 2C-3
2C.2.3 Code Revisions 2C-4
2C.2.4 Determination of Allowable Stresses 2C-4
2C.2.5 Treatment of Weld and Riveted Joint Efficiency, and Ligament Efficiency 2C-5
2C.2.6 Treatment of Damage in Formed Heads 2C-6
2C.2.7 Thickness for Supplemental Loads 2C-7
2C.2.7.1 Definition 2C-7
2C.2.7.2 Required Thickness 2C-7
2C.2.7.3 Vertical Vessels 2C-7
2C.2.7.4 Design-by-Rule Using VIII-2 ..... 2C-8
2C.2.7.5 Piping Systems 2C-8
2C.2.8 Determination of Metal Loss and Future Corrosion Allowance 2C-8
2C.2.9 Treatment of Metal Loss and Future Corrosion Allowance 2C-8
2C.2.10 Treatment of Shell Distortions 2C-8
2C.3 PRESSURE VESSELS AND BOILER COMPONENTS – INTERNAL PRESSURE 2C-9
2C.3.1 Overview 2C-9
2C.3.2 Shell Tolerances 2C-9
2C.3.3 Shell Thickness and MAWP 2C-9
2C.3.3.1 Cylindrical Shells 2C-9
2C.3.3.2 Spherical Shell or Hemispherical Head 2C-10
2C.3.3.3 Elliptical Head 2C-11
2C.3.3.4 Torispherical Head 2C-11
2C.3.3.5 Conical Shell 2C-12
2C.3.3.6 Toriconical Head 2C-13
2C.3.3.7 Conical Transition 2C-13
2C.3.4 Nozzles Connections in Shells 2C-16
2C.3.4.1 General 2C-16
2C.3.4.2 Required Reinforcement 2C-16
2C.3.4.3 Weld Strength Analysis 2C-17
2C.3.5 Junction Reinforcement Requirements at Conical Transitions 2C-19
2C.3.6 Other Components 2C-19
2C.4 PRESSURE VESSELS AND BOILER COMPONENTS – EXTERNAL PRESSURE 2C-20
2C.5 PIPING COMPONENTS AND BOILER TUBES 2C-20
2C.5.1 Overview 2C-20
2C.5.2 Metal Loss 2C-20
2C.5.3 Required Thickness and MAWP – Straight Pipes Subject to Internal Pressure 2C-20
2C.5.4 Required Thickness and MAWP – Boiler Tubes 2C-21
2C.5.5 Required Thickness and MAWP – Pipe Bends Subject to Internal Pressure 2C-21
2C.5.6 Required Thickness and MAWP for External Pressure 2C-23
2C.5.7 Branch Connections 2C-23

2C.6 API 650 STORAGE TANKS 2C-23
2C.6.1 Overview *2C-23*
2C.6.2 Metal Loss *2C-24*
2C.6.3 Required Thickness and MFH for Liquid Hydrostatic Loading *2C-24*
2C.7 ESTIMATION OF BURST PRESSURE 2C-24
2C.7.1 Svensson's Method *2C-24*
2C.7.2 Cylindrical Shell Burst Pressure *2C-25*
2C.7.3 Spherical Shell Burst Pressure *2C-25*
2C.8 NOMENCLATURE 2C-26
2C.9 REFERENCES 2C-32
2C.10 TABLES 2C-34
2C.11 FIGURES 2C-36

ANNEX 2D – STRESS ANALYSIS OVERVIEW FOR AN FFS ASSESSMENT 2D-1

2D.1 GENERAL REQUIREMENTS 2D-1
2D.1.1 Scope *2D-1*
2D.1.2 ASME B&PV Code, Section VIII, Division 2 (VIII-2) *2D-1*
2D.1.3 Applicability *2D-2*
2D.1.4 Protection Against Failure Modes *2D-2*
2D.1.5 Numerical Analysis *2D-2*
2D.1.6 Material Properties *2D-2*
2D.1.7 Applicable Loads and Load Case Combinations *2D-3*
2D.1.8 Loading Histogram *2D-3*
2D.2 PROTECTION AGAINST PLASTIC COLLAPSE 2D-4
2D.2.1 Overview *2D-4*
2D.2.2 Elastic Stress Analysis Method *2D-4*
2D.2.3 Limit Load Analysis Method *2D-4*
2D.2.4 Elastic-Plastic Stress Analysis Method *2D-4*
2D.2.5 Treatment of the Weld Joint Efficiency *2D-4*
2D.3 PROTECTION AGAINST LOCAL FAILURE 2D-5
2D.3.1 Overview *2D-5*
2D.3.2 Elastic Analysis Method *2D-5*
2D.3.3 Elastic-Plastic Analysis Method *2D-6*
2D.4 PROTECTION AGAINST COLLAPSE FROM BUCKLING 2D-6
2D.4.1 Assessment Procedure *2D-6*
2D.4.2 Supplemental Requirements for Components with Flaws *2D-6*
2D.5 SUPPLEMENTAL REQUIREMENTS FOR STRESS CLASSIFICATION IN NOZZLE NECKS 2D-6
2D.6 NOMENCLATURE 2D-6
2D.7 REFERENCES 2D-7
2D.8 TABLES 2D-8

ANNEX 2E – MATERIAL PROPERTIES FOR STRESS ANALYSIS 2E-1

2E.1 GENERAL 2E-1
2E.1.1 Material Properties Required *2E-1*
2E.1.2 Material Properties and In-Service Degradation *2E-2*
2E.2 STRENGTH PARAMETERS 2E-2
2E.2.1 Yield and Tensile Strength *2E-2*
2E.2.1.1 Mean Estimates of Tensile Strength from Hardness Tests 2E-2
2E.2.1.2 Minimum Specified Yield and Tensile Strength from MPC Correlations 2E-2

2E.2.1.3 Minimum Specified Yield and Tensile Strength from API Std 530 and WRC Bulletin 541 ..... 2E-3
2E.2.1.4 Minimum Specified Yield and Tensile Strength Data from ASME Code, Section II, Part D 2E-3
2E.2.1.5 Mean Values of Yield and tensile Strength from Minimum Specified Values 2E-3
2E.2.2 Flow Stress 2E-3
2E.2.2.1 Definition 2E-3
2E.2.2.2 Estimation of Flow Stress 2E-3
2E.3 MONOTONIC STRESS-STRAIN RELATIONSHIPS 2E-4
2E.3.1 MPC True Stress-Strain Curve Model 2E-4
2E.3.2 MPC Tangent Modulus Model 2E-5
2E.3.3 Ramberg-Osgood Stress-Strain Model 2E-6
2E.3.3.1 True Stress-Strain Curve 2E-6
2E.3.3.2 Engineering Stress-Strain Curve 2E-7
2E.3.4 Ramberg-Osgood Tangent Modulus Model 2E-8
2E.3.5 Engineering Stress-Strain Models for API 5L Pipeline Materials 2E-8
2E.3.5.1 Stress-Strain Model from CSA Z662 ..... 2E-8
2E.3.5.2 API 5L Grades X52 to X80 ..... 2E-8
2E.3.5.3 API 5L Grades X80 to X100 ..... 2E-8
2E.3.6 Tangent Modulus Model for API 5L Pipeline Materials 2E-10
2E.4 CYCLIC STRESS-STRAIN RELATIONSHIPS 2E-10
2E.4.1 Ramberg-Osgood Equation 2E-10
2E.4.2 Estimation of Cyclic Stress-Strain Curve Parameters 2E-10
2E.4.2.1 Estimation from Monotonic Properties 2E-10
2E.4.2.2 Uniform Material Law 2E-11
2E.5 PHYSICAL PROPERTIES 2E-11
2E.5.1 Elastic Modulus 2E-11
2E.5.2 Poisson's Ratio 2E-11
2E.5.3 Coefficient of Thermal Expansion 2E-11
2E.5.4 Thermal Conductivity 2E-11
2E.5.5 Thermal Diffusivity 2E-11
2E.5.6 Density 2E-12
2E.6 NOMENCLATURE 2E-12
2E.7 REFERENCES 2E-14
2E.8 TABLES 2E-16

ANNEX 2F – ALTERNATIVE METHOD FOR ESTABLISHING THE REMAINING STRENGTH FACTOR 2F-1

2F.1 OVERVIEW 2F-1
2F.2 ESTABLISHING AN ALLOWABLE REMAINING STRENGTH FACTOR – RSF_A 2F-1
2F.3 NOMENCLATURE 2F-2
2F.4 REFERENCES 2F-2

PART 3 – ASSESSMENT OF EXISTING EQUIPMENT FOR BRITTLE FRACTURE 3-1

3.1 GENERAL 3-2
3.1.1 Evaluation of Resistance to Brittle Fracture 3-2
3.1.2 Avoidance of Catastrophic Brittle Fracture 3-2
3.1.3 Use of Construction Codes and Standards for Brittle Fracture Assessment 3-2
3.1.4 Boilers and Boiler External Piping 3-2
3.1.5 Supplemental Brittle Fracture Assessment to Other FFS Assessment Procedures 3-2
3.1.6 Critical Exposure Temperature (CET) 3-3
3.1.7 Minimum Allowable Temperature (MAT) 3-3
3.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 3-3

3.2.1 Equipment Covered ... 3-3
3.2.2 Components Subject to Metal Loss ... 3-4
3.2.3 Requirements for In-Service Inspection and Maintenance Programs ... 3-4
3.2.4 Supplemental Guidance for SA-212 Grade B Material ... 3-4
3.3 DATA REQUIREMENTS ... 3-4
3.3.1 Original Equipment Design Data ... 3-5
3.3.2 Maintenance and Operational History ... 3-5
3.3.3 Required Data/Measurements for an FFS Assessment ... 3-5
3.3.4 Recommendations for Inspection Technique and Sizing Requirements ... 3-6
3.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA ... 3-6
3.4.1 Overview ... 3-6
3.4.2 Level 1 Assessment ... 3-7
3.4.3 Level 2 Assessment ... 3-10
3.4.4 Level 3 Assessment ... 3-15
3.5 REMAINING LIFE ASSESSMENT ... 3-16
3.5.1 Acceptability for Continued Service ... 3-16
3.5.2 Pressure Vessels ... 3-17
3.5.3 Piping Systems ... 3-17
3.5.4 Atmospheric and Low Pressure Storage Tanks ... 3-17
3.6 REMEDIATION ... 3-17
3.6.1 Potential Use of Remediation Methods ... 3-17
3.6.2 Remediation Methods ... 3-17
3.7 IN-SERVICE MONITORING ... 3-19
3.7.1 In-Service Monitoring and Control of Process Conditions ... 3-19
3.7.2 Monitoring for Degradation of Low Alloy Steel Notch Toughness ... 3-19
3.7.3 Monitoring for Criticality of Growing Flaws ... 3-19
3.7.4 Assessment of Non-Growing Flaws Detected In-Service ... 3-19
3.8 DOCUMENTATION ... 3-19
3.8.1 Documentation Requirements for Each Assessment Level ... 3-19
3.8.2 Documentation Retention ... 3-20
3.9 NOMENCLATURE ... 3-20
3.10 REFERENCES ... 3-21
3.11 TABLES ... 3-22
3.12 FIGURES ... 3-28

ANNEX 3A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF EXISTING EQUIPMENT FOR BRITTLE FRACTURE ... 3A-1

3A.1 TECHNICAL BASIS AND VALIDATION ... 3A-1
3A.2 REFERENCES ... 3A-1

PART 4 – ASSESSMENT OF GENERAL METAL LOSS ... 4-1

4.1 GENERAL ... 4-1
4.1.1 Assessment Procedures for General Metal Loss ... 4-1
4.1.2 Thickness Averaging Approach Used for the Assessment ... 4-1
4.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE ... 4-2
4.2.1 General Metal Loss Assessment ... 4-2
4.2.2 Limitations Based on Flaw Type ... 4-2
4.2.3 Calculation of the $MAWP_r$ and MFH_r and Coincident Temperature ... 4-2

4.2.4 Limitations Based on Temperature *4-2*
4.2.5 Definition of Component Types *4-2*
4.2.6 Applicability of the Level 1 and Level 2 Assessment Procedures *4-2*
4.2.7 Applicability of the Level 3 Assessment Procedures *4-3*
4.3 DATA REQUIREMENTS 4-3
4.3.1 Original Equipment Design Data *4-3*
4.3.2 Maintenance and Operational History *4-3*
4.3.3 Required Data/Measurements for an FFS Assessment *4-4*
4.3.4 Recommendations for Inspection Technique and Sizing Requirements *4-6*
4.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 4-7
4.4.1 Overview *4-7*
4.4.2 Level 1 Assessment *4-8*
4.4.3 Level 2 Assessment *4-9*
4.4.4 Level 3 Assessment *4-11*
4.5 REMAINING LIFE ASSESSMENT 4-12
4.5.1 Thickness Approach *4-12*
4.5.2 MAWP Approach *4-12*
4.6 REMEDIATION 4-13
4.6.1 Objectives *4-13*
4.6.2 Methods *4-13*
4.7 IN–SERVICE MONITORING 4-15
4.7.1 Objectives *4-15*
4.7.2 Monitoring Methods *4-15*
4.7.3 Calibration *4-15*
4.8 DOCUMENTATION 4-15
4.8.1 General *4-15*
4.8.2 Inspection Data *4-15*
4.9 NOMENCLATURE 4-15
4.10 REFERENCES 4-18
4.11 TABLES 4-19
4.12 FIGURES 4-28

ANNEX 4A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF GENERAL METAL LOSS 4A-1

4A.1 TECHNICAL BASIS AND VALIDATION 4A-1
4A.2 REFERENCES 4A-1

PART 5 – ASSESSMENT OF LOCAL METAL LOSS 5-1

5.1 GENERAL 5-1
5.1.1 Assessment Procedures for Local Metal Loss *5-1*
5.1.2 Choice of Part 4 or Part 5 Assessment Procedures *5-2*
5.1.3 Pitting Damage *5-2*
5.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 5-2
5.2.1 Local Metal Loss Assessment *5-2*
5.2.2 Limitations Based on Flaw Type *5-2*
5.2.3 Calculation of the $MAWP_r$ and MFH_r, and Coincident Temperature *5-2*
5.2.4 Limitations Based on Temperature *5-3*
5.2.5 Applicability of the Level 1 and Level 2 Assessment Procedures *5-3*
5.2.6 Applicability of the Level 3 Assessment Procedures *5-3*

5.2.7 Assessment of Blend Ground Areas for Crack-Like Flaw Removal *5-4*
5.3 DATA REQUIREMENTS 5-4
5.3.1 Original Equipment Design Data *5-4*
5.3.2 Maintenance and Operational History *5-4*
5.3.3 Required Data/Measurements for an FFS Assessment *5-4*
5.3.4 Recommendations for Inspection Technique and Sizing Requirements *5-5*
5.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 5-6
5.4.1 Overview *5-6*
5.4.2 Level 1 Assessment *5-6*
5.4.3 Level 2 Assessment *5-8*
5.4.4 Level 3 Assessment *5-14*
5.5 REMAINING LIFE ASSESSMENT 5-14
5.5.1 Thickness Approach *5-14*
5.5.2 MAWP Approach *5-15*
5.6 REMEDIATION 5-15
5.7 IN-SERVICE MONITORING 5-15
5.8 DOCUMENTATION 5-15
5.8.1 General *5-15*
5.8.2 Inspection Data *5-15*
5.9 NOMENCLATURE 5-16
5.10 REFERENCES 5-20
5.11 TABLES 5-21
5.12 FIGURES 5-27

ANNEX 5A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF LOCAL METAL LOSS 5A-1

5A.1 TECHNICAL BASIS AND VALIDATION 5A-1
5A.2 REFERENCES 5A-1

PART 6 – ASSESSMENT OF PITTING CORROSION 6-1

6.1 GENERAL 6-1
6.1.1 Assessment of Pitting Corrosion *6-1*
6.1.2 Assessment of Blister Arrays *6-1*
6.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 6-1
6.2.1 Assessment of Four Types of Pitting Corrosion *6-2*
6.2.2 Calculation of the $MAWP_r$ and MFH_r and Coincident Temperature *6-2*
6.2.3 Limitations Based on Flaw Type *6-2*
6.2.4 Limitations Based on Temperature *6-2*
6.2.5 Applicability of the Level 1 and Level 2 Assessment Procedures *6-2*
6.2.6 Applicability of the Level 3 Assessment Procedures *6-3*
6.2.7 Assessment for Active Pitting Corrosion *6-3*
6.2.8 Future Corrosion Allowance *6-3*
6.3 DATA REQUIREMENTS 6-4
6.3.1 Original Equipment Design Data *6-4*
6.3.2 Maintenance and Operational History *6-4*
6.3.3 Required Data/Measurements for an FFS Assessment *6-4*
6.3.4 Recommendation for Inspection Technique and Sizing Requirements *6-5*
6.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 6-6
6.4.1 Overview *6-6*

6.4.2 Level 1 Assessment *6-6*
6.4.3 Level 2 Assessment *6-8*
6.4.4 Level 3 Assessment *6-13*
6.5 Remaining Life Assessment 6-14
6.5.1 MAWP Approach *6-14*
6.5.2 MAWP Procedure for Remaining Life Determination *6-14*
6.6 Remediation 6-15
6.7 In-Service Monitoring 6-15
6.8 Documentation 6-15
6.8.1 General *6-15*
6.8.2 Inspection Data *6-15*
6.9 Nomenclature 6-15
6.10 References 6-18
6.11 Tables 6-19
6.12 Figures 6-21

ANNEX 6A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF PITTING CORROSION 6A-1

6A.1 Technical Basis and Validation 6A-1
6A.2 References 6A-1

PART 7 – ASSESSMENT OF HYDROGEN BLISTERS AND HYDROGEN DAMAGE ASSOCIATED WITH HIC AND SOHIC 7-1

7.1 General 7-2
7.1.1 Assessment Procedures for Hydrogen Blisters, HIC and SOHIC *7-2*
7.1.2 HIC Definition *7-2*
7.1.3 SOHIC Definition *7-2*
7.1.4 Hydrogen Blistering Definition *7-2*
7.1.5 HIC, SOHIC and Blistering Distinct Damage Types *7-3*
7.2 Applicability and Limitations of the Procedure 7-3
7.2.1 HIC, SOHIC and Blistering Distinct Damage Types *7-3*
7.2.2 Calculation of the $MAWP_r$ and MFH_r and Coincident Temperature *7-3*
7.2.3 Limitations Based on Temperature *7-3*
7.2.4 Applicability of the Level 1 and Level 2 Assessment Procedures *7-3*
7.2.5 Applicability of the Level 3 Assessment Procedure *7-4*
7.3 Data Requirements 7-4
7.3.1 Original Equipment Design Data *7-4*
7.3.2 Maintenance and Operational History *7-4*
7.3.3 Required Data/Measurements for an FFS Assessment *7-4*
7.3.4 Recommendations for Detection, Characterization, and Sizing *7-7*
7.4 Assessment Techniques and Acceptance Criteria 7-7
7.4.1 Overview *7-7*
7.4.2 Level 1 Assessment *7-8*
7.4.3 Level 2 Assessment *7-10*
7.4.4 Level 3 Assessment *7-14*
7.5 Remaining Life Assessment 7-15
7.5.1 HIC and SOHIC Growth Rates *7-15*
7.5.2 Blister Growth *7-16*
7.6 Remediation 7-16

7.6.1 Elimination of Hydrogen Charging *7-16*
7.6.2 Controlling Hydrogen Charging *7-16*
7.6.3 Venting of Blisters *7-16*
7.6.4 Blend Grinding *7-16*
7.6.5 Repair and Replacement of Damaged Material *7-17*
7.6.6 NACE Standard SP0296-10 ..... *7-17*
7.7 IN-SERVICE MONITORING 7-17
7.7.1 Monitoring for Hydrogen Charging *7-17*
7.7.2 Inspection Methods for Monitoring *7-17*
7.7.3 Detection of HIC, SOHIC, or Blister Damage Growth *7-17*
7.8 DOCUMENTATION 7-17
7.8.1 General *7-17*
7.8.2 Inspection Data *7-17*
7.8.3 In-Service Monitoring *7-18*
7.9 NOMENCLATURE 7-18
7.10 REFERENCES 7-19
7.11 TABLES 7-20
7.12 FIGURES 7-22

ANNEX 7A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF HYDROGEN BLISTERS AND HYDROGEN DAMAGE ASSOCIATED WITH HIC AND SOHIC 7A-1

7A.1 TECHNICAL BASIS AND VALIDATION 7A-1
7A.2 REFERENCES 7A-1

PART 8 – ASSESSMENT OF WELD MISALIGNMENT AND SHELL DISTORTIONS 8-1

8.1 GENERAL 8-1
8.1.1 Evaluation of Weld Misalignment and Shell Distortions *8-1*
8.1.2 ASME B&PV Code, Section VIII, Division 2 ..... *8-1*
8.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 8-2
8.2.1 Types of Weld Misalignment and Shell Distortions *8-2*
8.2.2 Limitations Based on Flaw Type *8-2*
8.2.3 Calculation of the $MAWP_r$ and MFH_r and Coincident Temperature *8-2*
8.2.4 Limitations Based on Temperature *8-2*
8.2.5 Applicability of the Level 1 and Level 2 Assessment Procedures *8-3*
8.2.6 Applicability of the Level 3 Assessment *8-3*
8.3 DATA REQUIREMENTS 8-4
8.3.1 Original Equipment Design Data *8-4*
8.3.2 Maintenance and Operational History *8-4*
8.3.3 Required Data/Measurements for an FFS Assessment *8-4*
8.3.4 Recommendations for Inspection Technique and Sizing Requirements *8-4*
8.4 EVALUATION TECHNIQUES AND ACCEPTANCE CRITERIA 8-6
8.4.1 Overview *8-6*
8.4.2 Level 1 Assessment *8-6*
8.4.3 Level 2 Assessment *8-7*
8.4.4 Level 3 Assessment *8-12*
8.5 REMAINING LIFE ASSESSMENT 8-13
8.5.1 Categories – Metal Loss, Cyclic Loading, High Temperature Operation *8-13*
8.5.2 Requirements for a Level 3 Assessment *8-14*

8.6 REMEDIATION 8-14
8.6.1 Addition of Reinforcement *8-14*
8.6.2 Correction of Tolerances by Mechanical Means *8-14*
8.7 IN-SERVICE MONITORING 8-14
8.7.1 Overview *8-14*
8.7.2 Groove-Like and Crack-Like Flaws *8-14*
8.8 DOCUMENTATION 8-14
8.9 NOMENCLATURE 8-14
8.10 REFERENCES 8-19
8.11 TABLES 8-20
8.12 FIGURES 8-34

ANNEX 8A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF WELD MISALIGNMENT AND SHELL DISTORTIONS 8A-1

8A.1 TECHNICAL BASIS AND VALIDATION 8A-1
8A.2 REFERENCES 8A-1

PART 9 – ASSESSMENT OF CRACK-LIKE FLAWS 9-1

9.1 GENERAL 9-1
9.1.1 Assessment Procedures for Crack-Like Flaws *9-1*
9.1.2 ASME B&PV Code, Section VIII, Division 2 (VIII-2) *9-2*
9.1.3 Crack-Like Flaw Definition *9-2*
9.1.4 Treatment of Volumetric Flaws as Crack-Like Flaws *9-2*
9.1.5 Use of Assessment Procedures to Evaluate Brittle Fracture *9-2*
9.1.6 Service Environment and Material Interactions with Crack-Like flaws *9-2*
9.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 9-3
9.2.1 Overview *9-3*
9.2.2 Applicability of the Level 1 and Level 2 Assessment Procedures *9-3*
9.2.3 Applicability of the Level 3 Assessment Procedure *9-4*
9.2.4 Assessment Procedures for Notches in Groove-Like Flaws *9-4*
9.3 DATA REQUIREMENTS 9-4
9.3.1 General *9-4*
9.3.2 Original Equipment Design Data *9-5*
9.3.3 Maintenance and Operating History *9-5*
9.3.4 Required Data/Measurements for an FFS Assessment – Loads and Stresses *9-6*
9.3.5 Required Data/Measurements for an FFS Assessment – Material Properties *9-7*
9.3.6 Required Data/Measurements for an FFS Assessment – Flaw Characterization *9-8*
9.3.7 Recommendation for Inspection Technique and Sizing Requirements *9-12*
9.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 9-13
9.4.1 Overview *9-13*
9.4.2 Level 1 Assessment *9-14*
9.4.3 Level 2 Assessment *9-15*
9.4.4 Level 3 Assessment *9-19*
9.5 REMAINING LIFE ASSESSMENT 9-21
9.5.1 Subcritical Crack Growth *9-21*
9.5.2 Leak-Before-Break Analysis *9-23*
9.6 REMEDIATION 9-25
9.6.1 Objectives of Remediation *9-25*

9.6.2 Remediation Methods *9-25*
9.7 In-Service Monitoring 9-26
9.7.1 Monitoring of Subcritical Crack Growth *9-26*
9.7.2 Validation of Monitoring Method *9-26*
9.8 Documentation 9-26
9.8.1 General *9-26*
9.8.2 Assessment Procedure *9-27*
9.8.3 Remediation Methods *9-27*
9.8.4 In-Service Monitoring *9-28*
9.9 Nomenclature 9-28
9.10 References 9-29
9.11 Tables 9-30
9.12 Figures 9-34

ANNEX 9A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF CRACK-LIKE FLAWS 9A-1

9A.1 Technical Basis and Validation 9A-1
9A.2 References 9A-2

ANNEX 9B – COMPENDIUM OF STRESS INTENSITY FACTOR SOLUTIONS 9B-1

9B.1 General 9B-1
9B.2 Stress Analysis 9B-2
9B.3 Stress Intensity Factor Solutions for Plates 9B-4
9B.4 Stress Intensity Factor Solutions for Plates with Holes 9B-15
9B.5 Stress Intensity Factor Solutions for Cylinders 9B-21
9B.6 Stress Intensity Factor Solutions for Spheres 9B-30
9B.7 Stress Intensity Factor Solutions for Elbows and Pipe Bends 9B-33
9B.8 Stress Intensity Factor Solutions for Nozzles and Piping Tees 9B-33
9B.9 Stress Intensity Factor Solutions for Ring-Stiffened Cylinders 9B-35
9B.10 Stress Intensity Factor Solutions for Sleeve Reinforced Cylinders 9B-36
9B.11 Stress Intensity Factor Solutions for Round Bars and Bolts 9B-36
9B.12 Stress Intensity Factor Solutions for Cracks at Fillet Welds 9B-39
9B.13 Stress Intensity Factor Solutions Cracks in Clad Plates and Shells 9B-41
9B.14 The Weight Function Method for Surface Cracks 9B-41
9B.15 Nomenclature 9B-45
9B.16 References 9B-50
9B.17 Tables 9B-54
9B.18 Figures 9B-225

ANNEX 9C – COMPENDIUM OF REFERENCE STRESS SOLUTIONS FOR CRACK-LIKE FLAWS 9C-1

9C.1 General 9C-1
9C.2 Stress Analysis 9C-2
9C.3 Reference Stress Solutions for Plates 9C-9
9C.4 Reference Stress Solutions for Plates with Holes 9C-12
9C.5 Reference Stress Solutions for Cylinders 9C-13
9C.6 Reference Stress Solutions for Spheres 9C-22
9C.7 Reference Stress Solutions for Elbows and Pipe Bends 9C-23
9C.8 Reference Stress Solutions for Nozzles and Piping Tees 9C-24

9C.9 REFERENCE STRESS SOLUTIONS FOR RING-STIFFENED CYLINDERS 9C-25
9C.10 REFERENCE STRESS SOLUTIONS FOR SLEEVE REINFORCED CYLINDERS 9C-25
9C.11 REFERENCE STRESS SOLUTIONS FOR ROUND BARS AND BOLTS 9C-25
9C.12 REFERENCE STRESS SOLUTIONS FOR CRACKS AT FILLET WELDS 9C-27
9C.13 REFERENCE STRESS SOLUTIONS FOR CRACKS IN CLAD PLATES AND SHELLS 9C-27
9C.14 REFERENCE STRESS SOLUTIONS FOR CRACKS IN HEAVY WALL CYLINDERS $1 \leq t/Ri \leq 3$ 9C-27
9C.15 NOMENCLATURE 9C-28
9C.16 REFERENCES 9C-31
9C.17 TABLES 9C-33
9C.18 FIGURES 9C-45

ANNEX 9D – RESIDUAL STRESSES IN A FITNESS-FOR-SERVICE EVALUATION 9D-1

9D.1 GENERAL 9D-2
9D.1.1 Scope 9D-2
9D.1.2 Crack Driving Force Associated with Residual Stress 9D-2
9D.2 APPLICABILITY AND LIMITATIONS 9D-2
9D.2.1 Residual Stress Solutions for In-Service and New Welded Joints 9D-2
9D.2.2 Technical Basis 9D-3
9D.2.3 Applicable Materials 9D-3
9D.2.4 Weld Joint Geometry 9D-3
9D.2.5 Residual Stress Distributions 9D-3
9D.2.6 Residual Stress Distribution Reference Point 9D-3
9D.2.7 Use of Alternative Residual Stress Solutions 9D-3
9D.2.8 Residual Stress Distributions from Welding Simulation 9D-3
9D.3 DATA REQUIREMENTS AND DEFINITION OF VARIABLES 9D-4
9D.3.1 Required Data 9D-4
9D.3.2 Optional Data 9D-4
9D.3.3 Yield Strength in Residual Stress Calculations 9D-4
9D.4 RESIDUAL STRESS DISTRIBUTION MODIFYING FACTORS 9D-4
9D.4.1 Post Weld Heat Treatment 9D-4
9D.4.2 Pressure Tests 9D-5
9D.5 FULL PENETRATION CIRCUMFERENTIAL WELDS IN PIPING & PRESSURE VESSEL CYLINDRICAL SHELLS 9D-5
9D.5.1 Residual Stress Perpendicular to the Weld Seam (Circumferential Flaw) 9D-5
9D.5.2 Residual Stress Parallel to the Weld Seam (Longitudinal Flaw) 9D-6
9D.5.3 Technical Basis 9D-7
9D.6 FULL PENETRATION LONGITUDINAL WELDS IN PIPING & PRESSURE VESSEL CYLINDRICAL SHELLS 9D-7
9D.6.1 Residual Stress Perpendicular to the Weld Seam (Longitudinal Flaw) 9D-7
9D.6.2 Residual Stress Parallel to the Weld Seam (Circumferential Flaw) 9D-7
9D.6.3 Technical basis 9D-8
9D.7 FULL PENETRATION CIRCUMFERENTIAL WELDS IN SPHERES AND PRESSURE VESSEL HEADS 9D-8
9D.7.1 Residual Stress Perpendicular to the Weld Seam (Circumferential Flaw) 9D-8
9D.7.2 Residual Stress Parallel to the Weld Seam (Meridional Flaw) 9D-8
9D.7.3 Technical Basis 9D-8
9D.8 FULL PENETRATION MERIDIONAL (SEAM) WELDS IN SPHERES AND PRESSURE VESSEL HEADS 9D-9
9D.8.1 Residual Stress Perpendicular to the Weld Seam (Meridional Flaw) 9D-9
9D.8.2 Residual Stress Parallel to the Weld Seam (Circumferential Flaw) 9D-9
9D.8.3 Technical Basis 9D-9
9D.9 FULL PENETRATION WELDS IN STORAGE TANKS 9D-9
9D.10 FULL PENETRATION WELDS AT CORNER JOINTS (NOZZLES OR PIPING BRANCH CONNECTIONS) 9D-9
9D.10.1 Corner Joint, Set-In Nozzle Weld (See Figure 9D.7 and Figure 9D.8, Weld Joint A) 9D-9

9D.10.1.1 Residual Stress Perpendicular to the Weld Seam (See Figure 9D.9) 9D-9
9D.10.1.2 Residual Stress Parallel to the Weld Seam (See Figure 9D.9) 9D-10
9D.10.2 Corner Joint, Set-On Nozzle Weld (See Figure 9D.7 and Figure 9D.8, Weld Joint B) 9D-10
9D.10.2.1 Residual Stress Perpendicular to the Weld Seam 9D-10
9D.10.2.2 Residual Stress Parallel to the Weld Seam 9D-11
9D.10.3 Reinforcing Pad Shell Fillet Weld (See Figure 9D.7 and Figure 9D.8, Weld Joint C) 9D-11
9D.10.3.1 Residual Stress Perpendicular to the Weld Seam 9D-11
9D.10.3.2 Residual Stress Parallel to the Weld Seam 9D-11
9D.10.4 Piping Branch Connection (See Figure 9D.11) 9D-11
9D.10.4.1 Residual Stress Perpendicular to the Weld Seam (See Figure 9D.11) 9D-11
9D.10.4.2 Residual Stress Parallel to the Weld Seam (see Figure 9D.11) 9D-12
9D.10.5 Technical Basis 9D-12
9D.11 Full Penetration and Fillet Welds at a Tee Joint 9D-13
9D.11.1 Main Plate (See Figure 9D.12, Figure 9D.13 and Figure 9D.15) 9D-13
9D.11.1.1 Residual Stress Perpendicular to the Weld Seam 9D-13
9D.11.1.2 Residual Stress Parallel to the Weld Seam 9D-13
9D.11.2 Stay Plate (See Figure 9D.12, Figure 9D.14 and Figure 9D.15) 9D-14
9D.11.2.1 Residual Stress Perpendicular to the Weld 9D-14
9D.11.2.2 Residual Stress Parallel to the Weld Seam 9D-14
9D.11.3 Technical Basis 9D-14
9D.12 Repair Welds 9D-15
9D.12.1 Residual Stress Perpendicular to the Weld 9D-15
9D.12.2 Residual Stress Parallel to the Weld Seam 9D-15
9D.12.3 Technical Basis 9D-15
9D.13 Welding Simulation-Based Stress Distributions 9D-16
9D.13.1 General 9D-16
9D.13.2 Description of Simplified Method 9D-16
9D.13.3 Simulation References 9D-17
9D.14 Nomenclature 9D-18
9D.15 References 9D-19
9D.16 Tables 9D-23
9D.17 Figures 9D-25

ANNEX 9E – CRACK OPENING AREAS 9E-1

9E.1 Introduction 9E-1
9E.1.1 Scope 9E-1
9E.1.2 Overview of Crack Opening Area Calculations 9E-1
9E.2 Crack Opening Areas (COA) for Cylinders and Spheres 9E-2
9E.2.1 Longitudinal Cracks in Cylinders 9E-2
9E.2.2 Circumferential Cracks in Cylinders 9E-2
9E.2.3 Meridional Cracks in Spheres 9E-4
9E.2.4 Plasticity Correction for the COA 9E-4
9E.2.5 Nomenclature 9E-5
9E.2.6 References 9E-6
9E.2.7 Tables 9E-7

ANNEX 9F – MATERIAL PROPERTIES FOR CRACK-LIKE FLAWS 9F-1

9F.1 General 9F-2

9F.2 CHARPY V-NOTCH IMPACT ENERGY 9F-3
9F.2.1 Definition 9F-3
9F.2.2 Charpy V-Notch (CVN) Test 9F-3
9F.2.3 Charpy V-Notch Transition Curve 9F-5
9F.2.4 Charpy Transition Curves and ASME Division 1 and 2 Toughness Exemption Curves 9F-6
9F.2.4.1 Section VIII, Divisions 1 and 2 Toughness Requirements 9F-6
9F.2.4.2 Charpy Transition Curve for Toughness Exemption 9F-6
9F.2.4.3 Reference Temperature Determination 9F-7
9F.2.4.4 Reference Temperature for Part 9, Level 1 Assessments 9F-7
9F.2.4.5 Reference Temperature for Part 12 Assessments of Gouges and Dent-Gouge Combinations 9F-7
9F.3 FRACTURE TOUGHNESS 9F-8
9F.3.1 Definition 9F-8
9F.3.2 Fracture Toughness Parameters 9F-8
9F.3.3 Fracture Toughness Testing 9F-9
9F.3.3.1 Obtaining Samples for Toughness Testing 9F-9
9F.3.3.2 Fracture Toughness Tests 9F-9
9F.3.3.3 JR-Curve 9F-10
9F.3.4 Fracture Toughness Estimation from Charpy V-Notch Data 9F-10
9F.3.5 ASME B&PV Code, Section VIII Division 1 and 2 Fracture Toughness 9F-10
9F.4 FRACTURE TOUGHNESS ESTIMATION FOR AN FFS ASSESSMENT 9F-11
9F.4.1 Introduction 9F-11
9F.4.2 ASME Section XI Fracture Toughness 9F-11
9F.4.2.1 Indexing Procedure for Fracture Toughness Determination 9F-11
9F.4.2.2 Lower Bound Toughness Based on ASME Section XI Reference Curves 9F-12
9F.4.3 Fracture Toughness Master Curve 9F-12
9F.4.3.1 Overview 9F-12
9F.4.3.2 Determining the Master Curve Reference Transition Temperature $T0$ 9F-13
9F.4.3.3 Fracture Toughness Prediction Using the Master Curve 9F-17
9F.4.3.4 Determining the Master Curve Reference Transition Temperature T_0 for Modern Cr-Mo Steels 9F-18
9F.4.4 Upper Shelf Fracture Toughness 9F-18
9F.4.4.1 Overview 9F-18
9F.4.4.2 Fracture Toughness Prediction 9F-18
9F.4.5 Dynamic and Crack Arrest Fracture Toughness 9F-19
9F.4.5.1 Overview 9F-19
9F.4.5.2 Dynamic Fracture Toughness Prediction 9F-19
9F.4.5.3 Arrest Fracture Toughness Prediction 9F-20
9F.4.6 Fracture Toughness for Materials Subject to In-Service Degradation 9F-21
9F.4.6.1 Service Environment Effects on Fracture Toughness 9F-21
9F.4.6.2 Hydrogen Effects on Fracture Toughness and Flaw Assessment 9F-21
9F.4.6.3 Overview of Metallurgical Embrittlement that Reduces Ductility and Fracture Toughness 9F-22
9F.4.7 Aging Effects on the Fracture Toughness of Cr-Mo Steels 9F-23
9F.4.7.1 Overview 9F-23
9F.4.7.2 Effect of Tramp Elements on the Fracture Toughness of 1.25Cr-0.5Mo 9F-23
9F.4.7.3 Effect of Tramp Elements on the Fracture Toughness of 2.25Cr-1Mo 9F-24
9F.4.8 Fracture Toughness of Electroslag Welds in 2.25Cr-1Mo Vessels 9F-25
9F.4.9 Fracture Toughness as a Function of Temperature for Ferritic Materials 9F-26
9F.4.10 The Effect of Warm Pre-stress on Fracture Toughness 9F-26
9F.4.10.1 Introduction 9F-26
9F.4.10.2 Benefits 9F-26
9F.4.10.3 Procedure 9F-26
9F.4.10.4 Conditions to be Satisfied 9F-27
9F.4.11 Fracture Toughness Estimation for Brittle Fracture Assessments 9F-27
9F.4.12 Fracture Toughness of Austenitic Stainless Steel 9F-28
9F.4.13 Ductile Tearing Assessment Using a JR-curve 9F-28

9F.5 MATERIAL DATA FOR CRACK GROWTH CALCULATIONS 9F-28
9F.5.1 Categories of Crack Growth *9F-28*
9F.5.1.1 Crack Growth by Fatigue 9F-28
9F.5.1.2 Crack Growth by Stress Corrosion Cracking (SCC) 9F-29
9F.5.1.3 Crack Growth by Hydrogen Assisted Cracking (HAC) 9F-29
9F.5.1.4 Crack Growth by Corrosion Fatigue 9F-29
9F.5.2 Fatigue Crack Growth Equations *9F-30*
9F.5.2.1 Overview 9F-30
9F.5.2.2 Paris Equation 9F-30
9F.5.2.3 Modified Paris Equation for Welded Joints 9F-31
9F.5.2.4 Walker Equation 9F-31
9F.5.2.5 Trilinear and Bilinear Equations 9F-32
9F.5.2.6 Modified Forman Equation 9F-32
9F.5.2.7 NASGRO Equation 9F-33
9F.5.2.8 Collipriest Equation 9F-33
9F.5.2.9 ASME B&PV Code, Section VIII, Division 3 ..... 9F-33
9F.5.3 Fatigue Crack Growth Data *9F-34*
9F.5.3.1 Sources for Crack Growth Data 9F-34
9F.5.3.2 ASME B&PV Code, Section VIII, Division 3 ..... 9F-34
9F.5.3.3 ASME B&PV Code, Section XI 9F-34
9F.5.3.4 AFCEN Code, RSE-M 9F-34
9F.5.3.5 Barsom Original Crack Growth Data 9F-34
9F.5.3.6 Crack Growth Data for Welds 9F-34
9F.5.3.7 BS 7910 Crack Growth Data for Screening 9F-35
9F.5.3.8 BS 7910 Bilinear Crack Growth Data 9F-35
9F.5.3.9 Crack Growth Data for Pipeline Steels 9F-35
9F.5.3.10 NASGRO Crack Growth Data 9F-36
9F.5.4 Hydrogen Assisted Crack Growth *9F-36*
9F.5.4.1 ASME B31.12 ..... 9F-36
9F.5.4.2 ASME B&PV Code, Section VIII, Division 3 ..... 9F-36
9F.5.5 Stress Corrosion Crack (SCC) Growth Equations *9F-36*
9F.5.6 Stress Corrosion Crack Growth Data *9F-37*
9F.5.7 Conversion of Units for Crack Growth Data *9F-37*
9F.5.7.1 Cyclic Crack Growth Conversion Method 9F-37
9F.5.7.2 Time-Dependent Crack Growth Conversion Method 9F-37
9F.6 NOMENCLATURE 9F-38
9F.7 REFERENCES 9F-43
9F.8 TABLES 9F-46
9F.9 FIGURES 9F-59

ANNEX 9G – STRESS ANALYSIS FOR CRACK-LIKE FLAWS 9G-1

9G.1 GENERAL REQUIREMENTS 9G-1
9G.1.1 Scope *9G-1*
9G.1.2 ASME B&PV Code, Section VIII, Division 2 (VIII-2) *9G-2*
9G.1.3 FAD-Based Assessment Procedure *9G-2*
9G.1.4 Assessment Using Stress Analysis Results – Uncracked Configuration *9G-2*
9G.1.5 Assessment Using Stress Analysis Results – Crack Incorporated into the Model *9G-2*
9G.1.6 Assessment of Growing Cracks *9G-2*
9G.1.7 Numerical Analysis *9G-2*
9G.1.8 Applicable Loads and Load Case Combinations *9G-2*
9G.2 STRESS ANALYSIS OF THE UN-CRACKED CONFIGURATION 9G-3
9G.2.1 Overview *9G-3*

9G.2.2 Categorization and Linearization of Stress Results *9G-3*
9G.2.3 Fitting Stress Results to a Polynomial *9G-3*
9G.2.4 The Weight Function Method *9G-3*
9G.3 FINITE ELEMENT ANALYSIS OF COMPONENTS WITH CRACKS 9G-4
9G.3.1 Overview *9G-4*
9G.3.2 Output Quantity *9G-4*
9G.3.3 Mesh Design *9G-4*
9G.3.4 Crack Tip Modeling Approaches *9G-4*
9G.3.5 Focused Mesh Approach *9G-4*
9G.3.6 Finite Radius Approach *9G-5*
9G.3.7 Small Strain vs. Large Strain Analysis *9G-6*
9G.3.8 Convergence *9G-6*
9G.3.9 Initial and Thermal Strains *9G-7*
9G.3.10 Modeling Procedure *9G-7*
9G.4 FAD-BASED METHOD FOR NON-GROWING CRACKS 9G-8
9G.4.1 Overview *9G-8*
9G.4.2 Assessment Procedure *9G-8*
9G.5 DRIVING FORCE METHOD FOR NON-GROWING CRACKS 9G-10
9G.5.1 Overview *9G-10*
9G.5.2 Assessment Procedure *9G-10*
9G.6 ASSESSMENT OF GROWING CRACKS 9G-11
9G.6.1 Crack Growth Models *9G-11*
9G.6.2 Crack Parameter Solutions *9G-11*
9G.6.3 Determination of a Remaining Life *9G-11*
9G.6.4 Crack Growth Using Numerical Methods *9G-11*
9G.7 NOMENCLATURE 9G-11
9G.8 REFERENCES 9G-12
9G.9 FIGURES 9G-14

ANNEX 9H – CONSTRAINT EFFECTS FOR SURFACE FLAWS IN CARBON AND LOW-ALLOY STEEL COMPONENTS IN THE DUCTILE-BRITTLE TRANSITION REGION 9H-1

9H.1 GENERAL 9H-1
9H.1.1 Overview *9H-1*
9H.1.2 Applicability and Limitations of the Procedure *9H-1*
9H.1.3 Fracture Toughness Estimation Procedure *9H-2*
9H.2 NOMENCLATURE 9H-4
9H.3 REFERENCES 9H-5
9H.4 TABLES 9H-6
9H.5 FIGURES 9H-11

ANNEX 9I – ALTERNATIVE ESTIMATE OF MODE I STRESS INTENSITY FACTORS FOR FFS ASSESSMENTS IN THE DUCTILE-BRITTLE TRANSITION REGION 9I-1

9I.1 GENERAL 9I-1
9I.1.1 Overview *9I-1*
9I.1.2 Applicability and Limitations of the Procedure *9I-1*
9I.1.3 Alternative Estimate of Mode I Stress Intensity Factors for K_r Determination *9I-2*
9I.2 NOMENCLATURE 9I-3
9I.3 REFERENCES 9I-4

9I.4 FIGURES 9I-5

ANNEX 9J – DETERMINATION OF THE MINIMUM ALLOWABLE TEMPERATURE (MAT) USING A LEVEL 2 FRACTURE MECHANICS APPROACH CONSISTENT WITH PARTS 3 AND 9 ..... 9J-1

9J.1 INTRODUCTION 9J-1
9J.2 PROCEDURE TO DETERMINE THE MAT 9J-1
9J.2.1 General Procedure 9J-1
9J.2.2 Simplified Procedure 9J-3
9J.3 REQUIRED MODIFICATIONS FOR HYDROGEN SERVICE 9J-4
9J.3.1 Overview 9J-4
9J.3.2 2.25 Cr – 1 Mo 9J-4
9J.3.3 2.25 Cr – 1 Mo - V 9J-5
9J.3.4 Carbon Steel and Other Low-Chrome Alloys 9J-5
9J.4 MAT ENVELOPE 9J-6
9J.5 NOMENCLATURE 9J-6
9J.6 REFERENCES 9J-7
9J.7 TABLES 9J-8
9J.8 FIGURES 9J-11

PART 10 – ASSESSMENT OF COMPONENTS OPERATING IN THE CREEP RANGE 10-1

10.1 GENERAL 10-2
10.1.1 FFS Procedures and Temperature Limits 10-2
10.1.2 Remaining Life of Components with and without Crack-Like Flaws 10-2
10.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 10-2
10.2.1 Suitability for Service and Remaining Life 10-2
10.2.2 Applicability and Limitations 10-2
10.2.3 Recommendations for Life Predictions Exceeding 35 Years 10-4
10.3 DATA REQUIREMENTS 10-4
10.3.1 General 10-4
10.3.2 Original Equipment Design Data 10-4
10.3.3 Maintenance and Operational History 10-4
10.3.4 Required Data for an FFS Assessment – Loads and Stresses 10-5
10.3.5 Required Data for an FFS Assessment – Material Properties 10-6
10.3.6 Required Data for an FFS Assessment – Damage Characterization 10-7
10.3.7 Recommendation for Inspection Technique and Sizing Requirements 10-8
10.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 10-10
10.4.1 Overview 10-10
10.4.2 Level 1 Assessment 10-11
10.4.3 Level 2 Assessment 10-12
10.4.4 Level 3 Assessment 10-13
10.5 REMAINING LIFE ASSESSMENT 10-13
10.5.1 Overview 10-13
10.5.2 Creep Rupture Life 10-15
10.5.3 Creep-Fatigue Interaction 10-22
10.5.4 Creep Crack Growth 10-22
10.5.5 Creep Buckling 10-27
10.5.6 Creep-Fatigue Assessment of Ferritic-Austenitic Dissimilar Weld Joints 10-29
10.5.7 Microstructural Approach 10-32

10.6 REMEDIATION 10-34
10.6.1 Components with and without a Crack-Like Flaw *10-34*
10.6.2 Components with a Crack-Like Flaw *10-34*
10.7 IN-SERVICE MONITORING 10-34
10.8 DOCUMENTATION 10-34
10.8.1 General *10-34*
10.8.2 Assumptions Used in the Assumption *10-34*
10.8.3 Documentation for Life Assessment *10-34*
10.8.4 Supplemental Documentation for Creep Crack Growth *10-35*
10.8.5 Supplemental Documentation for Microstructural Approaches *10-35*
10.9 NOMENCLATURE 10-36
10.10 REFERENCES 10-43
10.11 TABLES 10-44
10.12 FIGURES 10-51

ANNEX 10A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF COMPONENTS OPERATING IN THE CREEP RANGE 10A-1

10A.1 TECHNICAL BASIS AND VALIDATION 10A-1
10A.2 TECHNICAL BASIS AND VALIDATION REFERENCES 10A-1
10A.3 ADDITIONAL REFERENCES 10A-3

ANNEX 10B – MATERIAL DATA FOR CREEP ANALYSIS 10B-1

10B.1 GENERAL 10B-1
10B.2 CREEP RUPTURE DATA 10B-1
10B.2.1 MPC Project Omega *10B-1*
10B.2.2 API Std 530, 6th Edition, September 2008 ..... *10B-3*
10B.2.3 WRC Bulletin 541 ..... *10B-3*
10B.3 TANGENT AND SECANT MODULUS 10B-4
10B.4 CREEP STRAIN-RATE DATA 10B-5
10B.5 ISOCHRONOUS STRESS-STRAIN CURVES 10B-5
10B.6 CREEP REGIME FATIGUE CURVES (CRACK INITIATION) 10B-6
10B.7 CREEP CRACK GROWTH DATA 10B-6
10B.8 NOMENCLATURE 10B-7
10B.9 REFERENCES 10B-9
10B.9.1 Technical References – High Temperature Assessment *10B-9*
10B.9.2 Creep Rupture Strength and Creep Strain Rate Data *10B-10*
10B.9.3 Creep Crack Growth Data *10B-12*
10B.10 TABLES 10B-14
10B.11 FIGURES 10B-59

PART 11 – ASSESSMENT OF FIRE DAMAGE 11-1

11.1 GENERAL 11-1
11.1.1 Assessment of Fire Damage *11-1*
11.1.2 Assessment of Process Upsets *11-1*
11.1.3 Guidelines and Assessment Flowchart *11-2*
11.1.4 Forms of Fire Damage *11-2*
11.1.5 Alternative Methods for Equipment Not Suitable for Operation *11-2*

11.2 Applicability and Limitations of the Procedure 11-2
11.2.1 Equipment and Components Covered by the Assessment Procedure 11-2
11.2.2 Equipment and Components Not Covered by the Assessment Procedure 11-2
11.3 Data Requirements 11-3
11.3.1 Original Equipment Design Data 11-3
11.3.2 Maintenance and Operational History 11-3
11.3.3 Required Data/Measurements for an FFS Assessment 11-3
11.3.4 Recommendations for Inspection Techniques and Sizing Requirements 11-7
11.4 Assessment Techniques and Acceptance Criteria 11-8
11.4.1 Overview 11-8
11.4.2 Level 1 Assessment 11-9
11.4.3 Level 2 Assessment 11-9
11.4.4 Level 3 Assessment 11-11
11.5 Remaining Life Assessment 11-12
11.5.1 Thinning and Crack-Like Flaw Damage 11-12
11.5.2 Creep Damage 11-12
11.6 Remediation 11-12
11.6.1 Techniques 11-12
11.6.2 Need for Repair or Replacement 11-12
11.7 In-Service Monitoring 11-12
11.8 Documentation 11-12
11.8.1 General 11-12
11.8.2 Heat Exposure Zones 11-13
11.8.3 Record Retention 11-13
11.9 Nomenclature 11-13
11.10 References 11-13
11.11 Tables 11-14
11.12 Figures 11-38

ANNEX 11A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF FIRE DAMAGE 11A-1

11A.1 Technical Basis and Validation 11A-1
11A.2 References 11A-1

ANNEX 11B – METALLURGICAL INVESTIGATION AND EVALUATION OF MECHANICAL PROPERTIES IN FIRE DAMAGE ASSESSMENT 11B-1

11B.1 General 11B-2
11B.1.1 Metallurgical Investigations 11B-2
11B.1.2 Materials Covered 11B-2
11B.1.3 Change in material properties from Fire Damage 11B-2
11B.2 Applicability and Limitations of the Procedure 11B-2
11B.3 Specific Responsibilities and Qualifications 11B-2
11B.3.1 Overview 11B-2
11B.3.2 Field Assessment Team 11B-2
11B.3.3 Laboratory Assessment Team 11B-3
11B.4 Evaluation Techniques 11B-3
11B.5 Field Assessment Techniques 11B-3
11B.5.1 Field Hardness Testing 11B-3
11B.5.2 In-situ Metallography or Replication 11B-4

11B.5.3 Positive Material Identification *11B-4*
11B.6 Laboratory Assessment Techniques 11B-5
11B.6.1 Coupon or Sample Removal *11B-5*
11B.6.2 Metallurgical Mounts and Mechanical Testing Specimens *11B-5*
11B.7 Work Procedure 11B-5
11B.7.1 STEP 1 – Select Equipment and Component Subject to Analysis *11B-5*
11B.7.2 STEP 2 – Select Sampling Technique(s) *11B-6*
11B.7.3 STEP 3 – Perform In-situ Metallography or Replica Evaluation *11B-6*
11B.7.4 STEP 4 – Take Field Hardness Readings *11B-6*
11B.7.5 STEP 5 – Remove Samples for Laboratory Analysis and Mechanical Testing (Optional) *11B-7*
11B.8 Guidance for Metallographic Analysis and Mechanical Testing Interpretation 11B-7
11B.8.1 Overview *11B-7*
11B.8.2 Reduction in Tensile Strength *11B-7*
11B.8.3 Reduction in Toughness *11B-7*
11B.8.4 Decrease of Corrosion Resistance *11B-8*
11B.8.5 Consideration for Reuse *11B-8*
11B.8.6 Heat Treatment *11B-8*
11B.9 Example of Metallography Analysis and Hardness Testing Results 11B-8
11B.9.1 Overview *11B-8*
11B.9.2 Samples *11B-9*
11B.9.3 Test Sequence *11B-9*
11B.9.4 Test Results – Metallography *11B-9*
11B.9.5 Test Results – Hardness *11B-10*
11B.10 Figures 11B-11

PART 12 – ASSESSMENT OF DENTS, GOUGES, AND DENT-GOUGE COMBINATIONS 12-1

12.1 General 12-1
12.1.1 Assessment Procedures for Dents, Gouges and Dent-Gouge Combinations *12-1*
12.1.2 Assessment Procedures for LTAs, Grooves, and Other Shell Distortions *12-2*
12.2 Applicability and Limitations of the Procedure 12-2
12.2.1 Overview *12-2*
12.2.2 Calculation of the MAWP and Coincident Temperature *12-2*
12.2.3 Limitations Based on Flaw Type *12-2*
12.2.4 Limitations Based on Temperature *12-2*
12.2.5 Applicability of the Level 1 and Level 2 Assessment Procedures *12-3*
12.2.6 Applicability of the Level 3 Assessment Procedure *12-4*
12.3 Data Requirements 12-4
12.3.1 Original Equipment Design Data *12-4*
12.3.2 Maintenance and Operational History *12-4*
12.3.3 Required Data/Measurements for an FFS Assessment *12-4*
12.3.4 Recommendations for Inspection Technique and Sizing Requirements *12-7*
12.4 Assessment Techniques and Acceptance Criteria 12-7
12.4.1 Overview *12-7*
12.4.2 Level 1 Assessment *12-8*
12.4.3 Level 2 Assessment *12-10*
12.4.4 Level 3 Assessment *12-13*
12.5 Remaining Life Assessment 12-14
12.5.1 Categories of Remaining Life Assessment *12-14*
12.5.2 Requirements for a Level 3 Assessment *12-14*
12.6 Remediation 12-14

12.6.1 Flaw Severity and Evaluation of Material Condition *12-14*
12.6.2 Reinforcement of Dents, Gouges and Dent-Gouge Combinations *12-14*
12.6.3 Use of General Corrosion Remediation Methods *12-14*
12.7 IN-SERVICE MONITORING 12-15
12.7.1 Requirements for In-Service Monitoring *12-15*
12.7.2 Visual Inspection and Field Measurements of Distortion *12-15*
12.8 DOCUMENTATION 12-15
12.8.1 Requirements *12-15*
12.8.2 Inspection and Field Measurements *12-15*
12.9 NOMENCLATURE 12-15
12.10 REFERENCES 12-17
12.11 TABLES 12-18
12.12 FIGURES 12-21

ANNEX 12A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF DENTS, GOUGES, AND DENT-GOUGE COMBINATIONS 12A-1

12A.1 TECHNICAL BASIS AND VALIDATION 12A-1
12A.2 REFERENCES 12A-1

PART 13 – ASSESSMENT OF LAMINATIONS 13-1

13.1 GENERAL 13-1
13.1.1 Assessment Procedures for Laminations *13-1*
13.1.2 Definition of Laminations *13-2*
13.1.3 Laminations in Hydrogen Charging Service *13-2*
13.1.4 Detection of Laminations *13-2*
13.1.5 Acceptance of Laminations *13-2*
13.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 13-2
13.2.1 Applicability and Limitations of the Assessments Procedures for Laminations *13-2*
13.2.2 Calculation of MAWP and Coincident Temperature *13-2*
13.2.3 Limitations Based on Temperature *13-2*
13.2.4 Limitations Based on Flaw Type *13-3*
13.2.5 Applicability of the Level 1 and Level 2 Assessment Procedures *13-3*
13.2.6 Applicability of the Level 3 Assessment *13-3*
13.3 DATA REQUIREMENTS 13-4
13.3.1 Original Equipment Design Data *13-4*
13.3.2 Maintenance and Operational History *13-4*
13.3.3 Required Data/Measurements for an FFS Assessment *13-4*
13.3.4 Recommendations for Inspection Technique and Sizing Requirements *13-5*
13.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 13-5
13.4.1 Overview *13-5*
13.4.2 Level 1 Assessment *13-5*
13.4.3 Level 2 Assessment *13-6*
13.4.4 Level 3 Assessment *13-7*
13.5 REMAINING LIFE ASSESSMENT 13-7
13.6 REMEDIATION 13-7
13.7 IN-SERVICE MONITORING 13-7
13.8 DOCUMENTATION 13-7
13.8.1 General *13-7*

13.8.2 Documentation of Flaw Size and Conditions *13-8*
13.8.3 Documentation of Flaw Growth *13-8*
13.9 NOMENCLATURE 13-8
13.10 REFERENCES 13-8
13.11 TABLES 13-9
13.12 FIGURES 13-10

ANNEX 13A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF LAMINATIONS 13A-1

13A.1 TECHNICAL BASIS AND VALIDATION 13A-1
13A.2 REFERENCES 13A-1

PART 14 – ASSESSMENT OF FATIGUE DAMAGE 14-1

14.1 GENERAL 14-2
14.1.1 Assessment Procedures for Fatigue Damage *14-2*
14.1.2 Damage Tolerance *14-2*
14.1.3 Fatigue Evaluation in the Creep Range *14-2*
14.1.4 Fatigue Evaluation and Crack-Like Flaws *14-2*
14.1.5 ASME B&PV Code, Section VIII, Division 2 (VIII-2) *14-3*
14.1.6 Use of Fatigue Curves in Performing Assessments *14-3*
14.1.7 Adjustment for Mean Stress *14-3*
14.1.8 Ratcheting *14-3*
14.2 APPLICABILITY AND LIMITATIONS OF THE PROCEDURE 14-3
14.2.1 Applicability and Limitations of the Assessment Procedures *14-3*
14.2.2 Calculation of MAWP and Coincident Temperature *14-3*
14.2.3 Limitations Based on Temperature *14-4*
14.2.4 Limitations Based on Flaw Type *14-4*
14.2.5 Applicability of the Level 1 and Level 2 Assessment Procedures *14-4*
14.2.6 Applicability of the Level 3 Assessment *14-4*
14.3 DATA REQUIREMENTS 14-5
14.3.1 Original Equipment Design Data *14-5*
14.3.2 Maintenance and Operational History *14-5*
14.3.3 Required Data/Measurements for an FFS Assessment *14-5*
14.3.4 Recommendations for Inspection Technique and Sizing Requirements *14-5*
14.4 ASSESSMENT TECHNIQUES AND ACCEPTANCE CRITERIA 14-6
14.4.1 Overview *14-6*
14.4.2 Level 1 Assessment *14-6*
14.4.2.1 Overview 14-6
14.4.2.2 Method A – Fatigue Screening Based on Experience with Comparable Equipment 14-7
14.4.2.3 Method B – Fatigue Screening 14-7
14.4.2.4 Method C – Fatigue Screening 14-8
14.4.2.5 Method D – Fatigue Screening, Welded Joints 14-10
14.4.2.6 Level 1 Assessment Results 14-12
14.4.3 Level 2 Assessment *14-12*
14.4.3.1 Overview 14-12
14.4.3.2 Method A – Fatigue Assessment Using Elastic Stress Analysis and Equivalent Stresses 14-13
14.4.3.3 Method B – Fatigue Assessment Using Elastic-Plastic Stress Analysis and Equivalent Strain 14-17
14.4.3.4 Method C – Fatigue Assessment of Welds Using the Equivalent Structural Stress 14-19
14.4.3.5 Ratcheting Assessment – Elastic Stress Analysis 14-23
14.4.3.6 Ratcheting Assessment – Elastic-Plastic Stress Analysis 14-25
14.4.3.7 Ratcheting Assessment – Non-Integral Connections 14-26

14.4.3.8 Level 2 Assessment Results 14-26
14.4.4 Level 3 Assessment 14-26
14.4.4.1 Overview 14-26
14.4.4.2 Method A – Elastic Stress Analysis and Critical Plane Approach 14-27
14.4.4.3 Method B – Elastic-Plastic Stress Analysis and Critical Plane Approach 14-28
14.4.4.4 Method C – Recognized Codes and Standards 14-29
14.5 REMAINING LIFE ASSESSMENT 14-29
14.5.1 Included in Level 2 and Level 3 Assessments 14-29
14.5.2 Loading Time History 14-29
14.6 REMEDIATION 14-29
14.6.1 Overview 14-29
14.6.2 Removal or Reduction of the Driving Energy Source or Forces. 14-30
14.6.3 Alteration of Component Constraint, Mechanical Design, or Weld Quality 14-30
14.6.4 Reduction of Temperature Differentials or Gradients 14-31
14.7 IN-SERVICE MONITORING 14-31
14.8 DOCUMENTATION 14-31
14.8.1 General 14-31
14.8.2 Assessment Level 14-31
14.8.3 Loading Time History 14-31
14.8.4 Material Properties 14-32
14.8.5 Stress Analysis Results 14-32
14.8.6 Assessment Results 14-32
14.8.7 Remaining Life Assessment 14-32
14.8.8 Remediation Methods 14-32
14.8.9 In-Service Monitoring 14-32
14.9 NOMENCLATURE 14-32
14.10 REFERENCES 14-41
14.11 TABLES 14-42
14.12 FIGURES 14-65

ANNEX 14A – TECHNICAL BASIS AND VALIDATION – ASSESSMENT OF FATIGUE DAMAGE 14A-1

14A.1 TECHNICAL BASIS AND VALIDATION 14A-1
14A.2 REFERENCES 14A-1

ANNEX 14B – MATERIAL PROPERTIES FOR FATIGUE ANALYSIS 14B-1

14B.1 SMOOTH BAR DESIGN FATIGUE CURVES – ASME CODE, SECTION VIII, DIVISION 2 ..... 14B-1
14B.1.1 Temperature Correction 14B-1
14B.1.2 Interpolation 14B-1
14B.1.3 Design Fatigue Curves Based on Testing in Air 14B-1
14B.1.4 Design Fatigue Curve Models 14B-2
14B.1.5 Computation of Allowable Cycles 14B-4
14B.2 SMOOTH BAR DESIGN FATIGUE CURVES – MEAN CURVE WITH EXPLICIT MARGINS 14B-4
14B.3 UNIFORM MATERIAL LAW 14B-5
14B.4 WELDED JOINT FATIGUE CURVES – ASME CODE, SECTION VIII, DIVISION 2 ..... 14B-5
14B.4.1 Fatigue Curve Models 14B-5
14B.4.2 Computation of Allowable Cycles 14B-5
14B.5 NOMENCLATURE 14B-6
14B.6 REFERENCES 14B-8
14B.7 TABLES 14B-10

14B.8 FIGURES 14B-17

ANNEX 14C – PLASTICITY CORRECTION AND CYCLE COUNTING FOR FATIGUE ANALYSIS 14C-1

14C.1 INTRODUCTION 14C-1
14C.1.1 Cycle Counting 14C-1
14C.1.2 Plasticity Correction 14C-1
14C.1.3 Definitions 14C-2
14C.1.4 Histogram Development 14C-3
14C.2 PLASTICITY CORRECTION 14C-3
14C.2.1 Uniaxial Plasticity Correction 14C-3
14C.2.2 Multiaxial Plasticity Correction 14C-3
14C.3 UNIAXIAL CYCLE COUNTING 14C-8
14C.3.1 Rainflow Cycle Counting – With Reordering 14C-8
14C.3.2 Additional Rainflow Cycle Counting – Without Reordering 14C-10
14C.4 MULTIAXIAL CYCLE COUNTING 14C-10
14C.4.1 Wang-Brown Cycle Counting 14C-10
14C.4.2 Critical Plane Cycle Counting 14C-14
14C.5 NOMENCLATURE 14C-18
14C.6 REFERENCES 14C-24
14C.7 FIGURES 14C-25

[Intentionally Left Blank]

FOREWORD

In contrast to the straightforward and conservative calculations that are typically found in design codes, more sophisticated assessment of metallurgical conditions and analyses of stresses and strains can more precisely indicate whether operating equipment is fit for its intended service or whether fabrication defects or in-service deterioration threaten its integrity. Such analyses offer a sound basis for decisions to continue to run as is or to alter, repair, monitor, retire or replace the equipment.

The publication of the American Petroleum Institute's Recommended Practice 579, Fitness-For-Service, in January 2000 provided the refining and petrochemical industry with a compendium of consensus methods for reliable assessment of the structural integrity of equipment containing identified flaws or damage. API RP 579 was written to be used in conjunction with the refining and petrochemical industry's existing codes for pressure vessels, piping and aboveground storage tanks (i.e., API 510, API 570 and API 653). The standardized Fitness-For-Service Assessment procedures presented in API RP 579 provide technically sound consensus approaches that ensure the safety of plant personnel and the public while aging equipment continues to operate and can be used to optimize maintenance and operation practices, maintain availability and enhance the long-term economic performance of plant equipment.

API RP 579 was prepared by a committee of the American Petroleum Institute with representatives of the Chemical Manufacturers Association, as well as some individuals associated with related industries. It grew out of a resource document developed by a Joint Industry Program on Fitness-For-Service administered by The Materials Properties Council. Although it incorporated the best practices known to the committee members, it was written as a Recommended Practice rather than as a mandatory standard or code.

While API was developing Fitness-For-Service methodology for the refining and petrochemical industry, the American Society of Mechanical Engineers (ASME) also began to address post-construction integrity issues. Realizing the possibility of overlap, duplication, and conflict in parallel standards, ASME and API formed the Joint Fitness-For-Service Committee in 2001 to develop and maintain a Fitness-For-Service standard for equipment operated in a wide range of process, manufacturing, and power generation industries. It was intended that this collaboration would promote the widespread adoption of these practices by regulatory bodies. The Joint Committee included the original members of the API Committee that were involved in the development of API Recommended Practice 579, complemented by a similar number of ASME members representing similar areas of expertise in other industries such as chemicals, power generation, and pulp and paper. In addition to owner representatives, it included substantial international participation and subject matter experts from universities and consulting firms.

In June 2007, the API and ASME Fitness-For-Service Joint Committee published the first edition of API 579-1/ASME FFS-1 Fitness-For-Service. The main enhancement in this publication relative to 2000 Edition API 579 was the addition of Part 10 covering the assessment of components operating in the creep range.

The 2016 Edition of API 579-1/ASME FFS-1 included many modifications and technical improvements. Some of the more significant changes are the following: reorganized the standard to facilitate use and updates by renumbering annexes that are directly associated with the relevant part of the document, Expanded equipment design code coverage, added a new annex for establishing an allowable Remaining Strength Factor (RSF), re-wrote weld residual stress solution annex for use in the assessment of crack-like flaws, updated guidance on material toughness predictions for use in the assessment of crack-like flaws, updated evaluation procedures for the assessment of creep damage, added an annex covering metallurgical investigation and evaluation of mechanical properties in a fire damage assessment, and developed new Part 14 covering the assessment of fatigue damage.

Numerous changes have been made for the 2021 Edition of API 579-1/ASME FFS-1 to address user feedback and to introduce new technology. A summary of these changes is provided on pages xxxv to xl.

This publication is written as a standard. Its words *shall* and *must* indicate explicit requirements that are essential for an assessment procedure to be correct. The word *should* indicate recommendations that are good practice but not essential. The word *may* indicate recommendations that are optional.

Most of the original technology that underlies this standard was developed by the Joint Industry Program on Fitness-For-Service, administered by The Materials Properties Council of the Welding Research Council, Inc., (WRC). The sponsorship of the member companies of this research consortium and the voluntary efforts of their company representatives are acknowledged with gratitude. Most of the next generation technology has been developed by WRC with some funding from API and ASME.

The committee encourages the broad use of the state-of-the-art methods presented here for evaluating all types of pressure vessels, boiler components, piping and tanks. The committee intends to continuously improve this standard as improved methodology is developed and as user feedback is received. All users are encouraged to inform the committee if they discover areas in which these procedures should be corrected, revised or expanded. Suggestions should be submitted to the Secretary, API/ASME Fitness-For-Service Joint Committee, The American Society of Mechanical Engineers, Two Park Avenue, New York, NY 10016, or SecretaryFFS@asme.org.

There is an option available to receive an e-mail notification when errata are posted to a particular code or standard. This option can be found on the Committee Web at http://go.asme.org/ffscommittee after selecting “errata” in the “Publication Information” section.

This standard is under the jurisdiction of the ASME Board on Pressure Technology Codes and Standards and the API CRE Committee and is the direct responsibility of the API/ASME Fitness-For-Service Joint Committee. The American National Standards Institute approved API 579-1/ASME FFS-1 2021 in December 2021.

Although every effort has been made to assure the accuracy and reliability of the information that is presented in this standard, API and ASME make no representation, warranty, or guarantee in connection with this publication and expressly disclaim any liability or responsibility for loss or damage resulting from its use or for the violation of any regulation with which this publication may conflict.

SPECIAL NOTES

This international Code was developed under the ASME/API Joint Committee on Fitness-For-Service Policies and Procedures, which were approved by ANSI and accredited as meeting the criteria for American National Standards and it is an American National Standard. The Standards Committee that approved this Code was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed Code was made available for public review and comment that provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

This document addresses problems of a general nature. With respect to particular circumstances, local, state, and federal laws and regulations should be reviewed.

Nothing contained in this document is to be construed as granting any right, by implication or otherwise, for the manufacture, sale, or use of any method, apparatus, or product covered by letters patent. Neither should anything contained in this document be construed as insuring anyone against liability for infringement of letters patent.

Neither API nor ASME nor any employees, subcontractors, consultants, committees, or other assignees of API or ASME make any warranty or representation, either express or implied, with respect to the accuracy, completeness, or usefulness of the information contained herein, or assume any liability or responsibility for any use, or the results of such use, of any information or process disclosed in this document. Neither API nor ASME nor any employees, subcontractors, consultants, or other assignees of API or ASME represent that use of this document would not infringe upon privately owned rights.

This document may be used by anyone desiring to do so. Every effort has been made to assure the accuracy and reliability of the data contained herein; however, API and ASME make no representation, warranty, or guarantee in connection with this document and hereby expressly disclaim any liability or responsibility for loss or damage resulting from its use or for the violation of any requirements of authorities having jurisdiction with which this document may conflict.

This document is published to facilitate the broad availability of proven, sound engineering and operating practices. This document is not intended to obviate the need for applying sound engineering judgment regarding when and where this document should be utilized. The formulation and publication of this document is not intended in any way to inhibit anyone from using any other practices.

Classified areas may vary depending on the location, conditions, equipment, and substances involved in any given situation. Users of this Code should consult with the appropriate authorities having jurisdiction.

Work sites and equipment operations may differ. Users are solely responsible for assessing their specific equipment and premises in determining the appropriateness of applying the Instructions. At all times users should employ sound business, scientific, engineering, and judgment safety when using this Code.

Users of this Code should not rely exclusively on the information contained in this document. Sound business, scientific, engineering, and safety judgment should be used in employing the information contained herein.

API and ASME are not undertaking to meet the duties of employers, manufacturers, or suppliers to warn and properly train and equip their employees, and others exposed, concerning health and safety risks and precautions, nor undertaking their obligations to comply with authorities having jurisdiction.

Information concerning safety and health risks and proper precautions with respect to particular materials and conditions should be obtained from the employer, the manufacturer or supplier of that material, or the material safety data sheet.

[Intentionally Left Blank]

SUMMARY OF CHANGES

A summary of editorial corrections, updates, and clarifications that are included throughout the standard along with several technical changes and enhancements are described below.

Part 2: *Fitness-For-Service Engineering Assessment Procedure*

- Added provision that permits $MAWP$ to be determined using the stress analysis procedures in Annex 2D.

Annex 2C: *Thickness, $MAWP$, and Stress Equations for an FFS Assessment*

- Added Svensson method for burst pressure calculation.
- Removed option to use ASME VIII-2 allowable stress for ASME VIII-1 equipment. This was originally a carryover from API 510 before the allowable stress criteria in ASME VIII-2 changed from a factor of safety of 3.0 to a factor or safety of 2.4.
- Removed requirement for nozzle reinforcement check for small nozzles to be consistent with ASME VIII-1.
- Removed legacy limit load nozzle reinforcement procedure which was previously eliminated in ASME VIII-1.

Annex 2D: *Stress Analysis Overview for an FFS Assessment*

- Elastic load cases reference ASME VIII-2 for simplicity.
- Removed option to use ASME VIII-2 allowable stress for ASME VIII-1 equipment.
- Modified coefficients for use in elastic-plastic calculation to cover the appropriate design margins with various current and legacy construction codes (including the appropriate design margins for pipelines).
- Added explicit guidance on capping the yield stress used in a limit load analysis to the yield stress at temperature to prevent misapplication of the method when evaluating components fabricated from materials that have a design Code elastic allowable stress equal to 90% of the Minimum Specific Yield Stress (MSYS).
- Limited the allowable remaining strength factor, RSF_a, for buckling assessments to no lower than 0.9.

Annex 2E*: Material Properties for Stress Analysis*

- Updated the Ramberg-Osgood stress-strain model for use in a Level 3 evaluation.
- Added guidance for material properties for Level 3 evaluations involving pipeline materials.
- Updated correlations for estimating material Ultimate Tensile Strength (UTS) using hardness testing.

Part 3: *Assessment of Existing Equipment for Brittle Fracture*

- Clarified that the use of design codes/standards as an alternative to Part 3 is considered a Level 3 Assessment.
- Corrected errors related to the Minimum Allowable Temperature (MAT) for bolting and nut material specifications.
- Expanded the definition of shock chilling and added the requirement that a Level 3 evaluation is necessary to evaluate conditions where the shock chilling screening is not satisfied.
- Added thickness limits for Level 1 impact test exemption curves to be consistent with ASME VIII-1.
- Clarified that no $PWHT$ credit is permitted in a brittle fracture evaluation of a component if previous repairs were completed using alternative weld methods (such as high preheat or temper bead).
- Added supplemental inspection requirements for brittle fracture evaluations performed on component identified to have metal loss that exceeds the original design tolerances.
- Explicitly excluded mill tolerance effects in a brittle fracture assessment.

- Modified impact test exemptions for flanges to address recent changes to ASME VIII-1.
  - Flanges Fabricated Pre-1989:
    - As-Forged SA-105 is Curve B. Heat-treated condition is Curve C.
    - MAT for ferritic flanges meeting ASME B16.5, ASME B16.47, or the Long Weld Neck (LWN) requirements of ASME VIII-1, UCS-66(c)(4) in the as-forged condition is -29°C (-20°F).
  - Flanges Fabricated in 1989 or Later:
    - As-Forged SA-105 is Curve A
    - Heat-treated condition SA-105 is Curve B
    - MAT for ferritic flanges meeting ASME B16.5, ASME B16.47, or LWN requirements in the as-forged is 0°F. Note: The basis for the 1989 cutoff comes from a 1996 report indicating "a number of flange failures have been reported during the past 5 years within the various Amoco operating units" and a Chemical Risks Directive requiring impact testing of all flanges in Europe being issued in response to a failure that occurred in 1998 on a flange that was installed in 1990.
  - MAT for ferritic flanges meeting ASME B16.5, ASME B16.47, or the LWN requirements in the normalized condition after forging shall be set at -29°C (-20°F) regardless of the year of manufacturing. (Note: Wording regarding "produced to fine grain practice" as currently included in ASME VIII-1 is not included).
  - For all ASME B16.5, ASME B16.47, and LWN flanges, MAT is set equal to the impact test exemption temperature "unless the MAT determined by the governing thickness at the flange nozzle neck weld joint together with the curve associated with the flange material gives a higher value."
- Added requirement that components not exposed to general primary membrane tensile stress shall be evaluated using the pressure rating basis in a Level 2 Assessment.

$$R_{ts} = \frac{P_a}{P_{rating}}$$

  - Added guidance that pressure rating in the stress ratio calculation can be calculated using paragraph 2C.3.4 for nozzle assemblies and paragraph 2C.3.6 for flanges.
  - Limited MAT to no lower than -48°C (-55°F) in as-welded condition even if Level 1 MAT was established using impact testing. (Note: MAT can still be reduced to -104°F (-155°F) if $PWHT$.)
    - Impact tested at or below -46°C (-50°F):

$$MAT = \max\left[\left(MAT_{Level\,1} - T_R\right), -104^\circ F\,(-155^\circ F)\right]$$

    - Impact tested above -46°C (-50°F):

$$MAT = \max\left[\left(MAT_{Level\,1} - T_R\right), -48^\circ F\,(-55^\circ F)\right] \quad \left(As-Welded\ Condition\right)$$


$$MAT = \max\left[\left(MAT_{Level\,1} - T_R\right), -104^\circ F\,(-155^\circ F)\right] \quad \left(PWHT\ Condition\right)$$

Part 4: *Assessment of General Metal Loss*

- Moved component type definitions and examples to a table to simplify designations.
- Exempted the cylinder side of 2:1 elliptical head-to-shell junctions as Type C components and structural discontinuities for metal loss assessments (applicable to Part 4, Part 5, and Part 6 Assessments).
- Revised qualifications to utilize Point Thickness Reading (PTR) approach to prevent misapplication of the method and "washing out" of local damage.

- Eliminated the check on Coefficient of Variation (COV).
- Added limitation on minimum measured thickness, i.e., $t_{mm} \geq 0.9 \cdot t_{avg}$.

- Revised length for thickness averaging at nozzles (Figure 4.13) to ensure method does not permit greater damage at nozzle junctions vs. away from nozzle junctions.

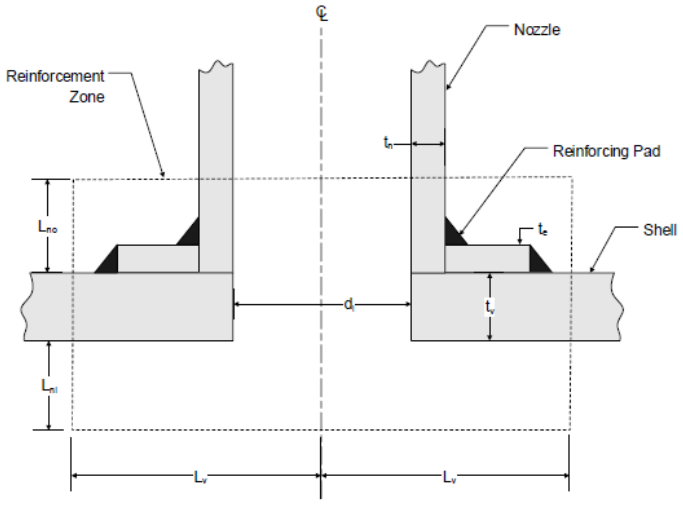

Nozzle with a Reinforcement Element

Notes:

1. Thickness averaging zone in the horizontal direction (see paragraph 4.3.3.4.a): $L_H = \min[L,\ L_v]$. L is calculated using Equation 4.7. $L_v = \max[d_i,\ (d_i/2 + t_n + t_v)]$.
2. Thickness averaging zone in the vertical direction on the outside of the shell (see paragraph 4.3.3.4.a). $L_{vno} = \min[L, L_{no}]$ L is calculated using Equation 4.7. $L_{no} = \min[2.5t_v,\ (2.5t_n + t_e)]$.
3. Thickness averaging zone in the vertical direction on the inside of the shell (see paragraph 4.3.3.4.a): $L_{vni} = \min[L, L_{ni}]$. L is calculated using Equation 4.7. $L_{ni} = \min[2.5t_v,\ 2.5t_n]$.

Figure 4.13 – Zone for Thickness Averaging – Nozzles and Fabricated Branch Connections

- Revised recommended UT grid spacing for scenarios when "corroded surface is not accessible for visual inspection, $L_s = \min[2t_{rd}, 25\ mm\ (1\ inch)]$.
- Documented the purpose of the minimum measured thickness limit in Level 1 and Level 2 Assessments.
- Included recommendations for validation of inspection results when thickness readings are less than or equal to 2.5 mm (0.100 inches) (also referenced in Part 5 *Assessment of Local Wall Loss* and Part 6 *Assessment of Pitting*).

Part 9: *Assessment of Crack-Like Flaws*

- Redefined crack-like flaw interaction and recategorization rules to reduce conservatism and for better alignment with ASME Section XI.
- Table 9.2 updated to reflect new Wallin Master Curve fracture toughness correlation for carbon and low alloy steels in Annex 9F.

Annex 9B: *Compendium of Stress Intensity Factor Solutions for Crack-like Flaws*

- Expanded K-solutions to cover thick-wall cylinders.

Annex 9C: *Compendium of Reference Stress Solutions for Crack-like Flaws*

- Updated solutions for circumferential flaws in cylinders.
- Expanded reference solutions to cover thick-wall cylinders.

Annex 9F: *Material Properties for Crack-like Flaws*

- Updated Wallin Master Curve fracture toughness correlation for carbon and low alloy steels,

$$K_{Jc} = 20 + \left(11 + 77\exp\left[0.0190\left(T - T_0\right)\right]\right)\left(\ln\left[\frac{1}{1-P_f}\right]\cdot\left(\frac{25}{L}\right)\right)^{0.25} \qquad \left(MPa\sqrt{m}, {}^{\circ}C, mm\right)$$

$$K_{Jc} = 18.2 + \left(9.9 + 70.1\exp\left[0.0106\left(T - T_0\right)\right]\right)\left(\ln\left[\frac{1}{1-P_f}\right]\cdot\left(\frac{1}{L}\right)\right)^{0.25} \qquad \left(ksi\sqrt{in}, {}^{\circ}F, in\right)$$

- Added ductile tearing material property data. The data was included in the 2007 edition of API 579, but mistakenly removed in the 2016 edition.
- Updated guidance on fracture toughness estimates for stainless-steel base metal and welds.
- Incorporated guidance from WRC Bulletin 562 *Recommendations for Establishing the Minimum Pressurization Temperature (MPT) for Equipment* and the API white paper *The Effects of Hydrogen for Establishing a Minimum Pressurization Temperature (MPT) for Heavy Wall Steel Reactor Vessels* to address material toughness modifications due to hydrogen and temper embrittlement effects.
- Added guidance for ASME VIII-3 equipment (high pressure).

New Annex 9H: *Constraint Effects for Surface Flaws in Carbon and Low-Alloy Steel Components in the Ductile-Brittle Transition Region*


- Established a procedure to adjust material fracture toughness to take advantage of constraint effects for surface flaws in a Level 2 Assessment.
- Technical basis is documented in WRC Bulletin 577 *Constraint Effects on Fracture Toughness in Ductile-Brittle Transition*.

New Annex 9I: *Alternative Estimate of Mode I Stress Intensity Factors*

- Established a procedure to reduce conservatism with the Mode I stress intensity factors using an integrated crack driving force over the crack front (rather than peak values) in a Level 2 assessment.
- Technical basis is documented in WRC Bulletin 577 *Constraint Effects on Fracture Toughness in Ductile-Brittle Transition*.


New Annex 9J: *Determination of the Minimum Allowable Temperature (MAT) using a Fracture Mechanics Approach*

- Established procedure for using fracture mechanics to determine the MAT.
- Included a simplified brittle fracture screening procedure developed using fracture mechanics.
- Provided guidance on the necessary adjustments for 2.25Cr-1Mo steel in hydrogen service.

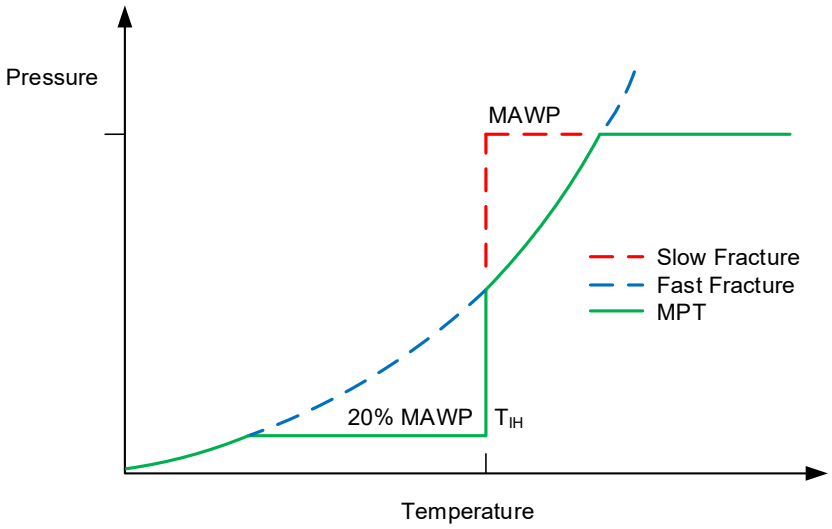

Part 10: *Assessment of Components Operating in the Creep Range*

- Updated Level 1 screening curves to ensure consistency with results from a Level 2 Assessment and incorporate technology updates (updated material coefficients, etc.).

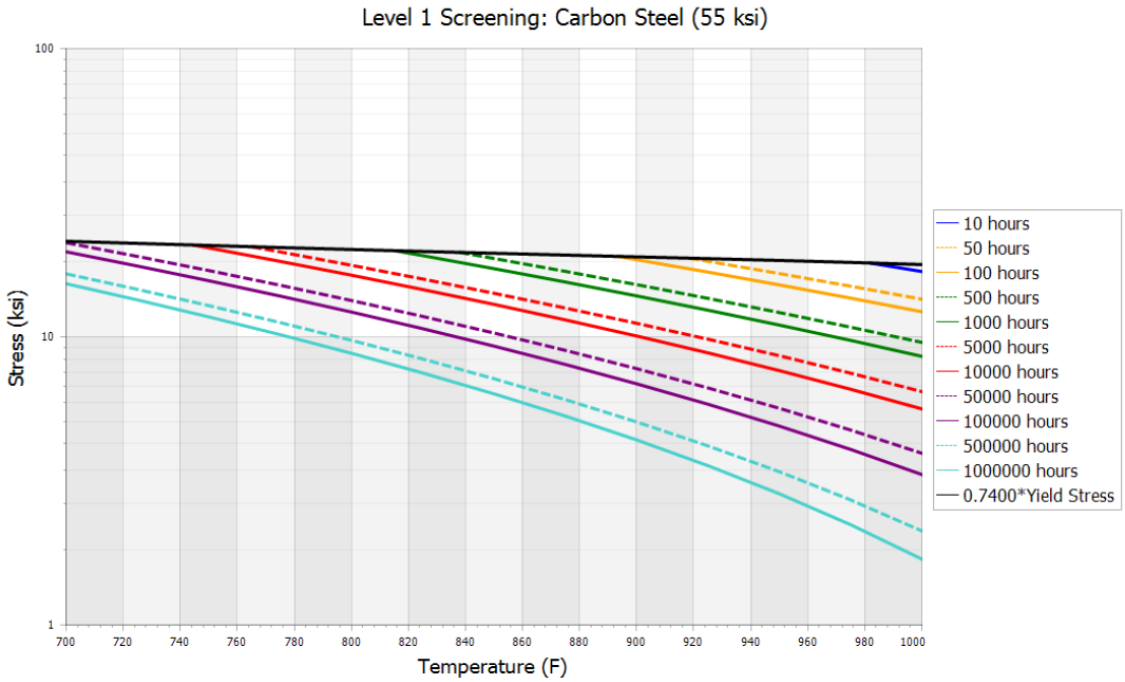

- Revised Level 1 maximum permissible damage limit to 0.8 in the evaluation of multiple operating conditions.
- Add structural thickness limit to Level 1 and Level 2 Assessments to protect against loss of containment due to the challenges and limitations associated with inspection of furnace tubes.

$$t_{\lim} = \min\left[0.9t_{nom},\ 2.5\,mm\ (0.100\ inches)\right]$$

Annex 10B: *Material Data for Creep Analysis*

- Updated existing and added new MPC Omega material coefficients.

- Added WRC Bulletin 541 revision 3 Larson-Miller material coefficients.
- Fixed elevated temperature fatigue curve coefficients.

Part 11: *Assessment of Fire Damage*

- Extended the use of hardness testing to cover carbon steel, low chrome, and stainless-steel materials.

Part 12: *Assessment of Dents, Gouges, and Dent-Gouge Combinations*

- Updated Level 1 and Level 2 procedures, applicability and limitations, and acceptance criteria to align with The Pipeline Defect Assessment Manual (PDAM).
- Table 12.2 updated to reflect new Wallin Master Curve fracture toughness correlation for carbon and low alloy steels in Annex 9F.

Part 14: *Assessment of Fatigue Damage*

- Added closed-form equation for smooth bar fatigue curves and data for new materials.
- Added smooth bar fatigue curves based on fatigue testing in air.
- Added bounds for use of smooth bar fatigue curve equations.
- Updated fatigue screening Method C and Method D.
- Corrected plasticity correction factor, $K_{e,k}$.
- Elastic ratcheting procedure re-written using Bree Diagram.
- Updated Level 2 procedure for Method C Fatigue Assessment.

Annex 14B: *Material Properties for Fatigue Analysis*

- Added closed-form equation for smooth bar fatigue curves and added data for new materials.
- Added smooth bar fatigue curves based on fatigue testing in air.
- Added bounds for use of smooth bar fatigue curve equations.

PART 1 – INTRODUCTION

CONTENTS

PART 1 – INTRODUCTION 1-1

1.1 INTRODUCTION 1-1
1.1.1 Construction Codes and Fitness-For-Service 1-1
1.1.2 Fitness-For-Service Definition 1-1
1.2 SCOPE 1-2
1.2.1 Supplement to In-Service Inspection Codes 1-2
1.2.2 Application Construction Codes 1-2
1.2.3 Other Recognized Codes and Standards 1-2
1.2.4 Remaining Life 1-3
1.2.5 Assessment Methods for Flaw Types and Damage Conditions 1-3
1.2.6 Special Cases 1-3
1.3 ORGANIZATION AND USE 1-4
1.4 RESPONSIBILITIES 1-4
1.4.1 Owner-User 1-4
1.4.2 Inspector 1-4
1.4.3 Engineer 1-4
1.4.4 Plant Engineer 1-5
1.5 QUALIFICATIONS 1-5
1.5.1 Education and Experience 1-5
1.5.2 Owner-User 1-5
1.5.3 Inspector 1-5
1.5.4 Engineer 1-6
1.6 DEFINITION OF TERMS 1-6
1.7 REFERENCES 1-6
1.7.1 Types 1-6
1.7.2 Code, Standards and Recommended Practices 1-6
1.7.3 Technical reports and Other Publications 1-6
1.8 TABLES 1-7

1.1 Introduction

1.1.1 Construction Codes and Fitness-For-Service

The ASME and API new construction codes and standards for pressurized equipment provide rules for the design, fabrication, inspection and testing of new pressure vessels, piping systems, and storage tanks. These codes typically do not provide rules to evaluate equipment that degrades while in-service and deficiencies caused by degradation or from original fabrication that may be found during subsequent inspections. API 510, API 570, API 653, and NB-23 Codes/Standards for the inspection, repair, alteration, and rerating of in-service pressure vessels, piping systems, and storage tanks do address the fact that equipment degrades while in service.

1.1.2 Fitness-For-Service Definition

Fitness-For-Service (FFS) Assessments are quantitative engineering evaluations that are performed to demonstrate the structural integrity of an in-service component that may contain a flaw or damage, or that may be operating under a specific condition that might cause a failure. This Standard provides guidance for conducting FFS Assessments using methodologies specifically prepared for pressurized equipment. The guidelines provided in this Standard can be used to make run-repair-replace decisions to help determine if components in pressurized