IEC 61076-8-110

Edition 1.0 2026-08

INTERNATIONAL STANDARD

Connectors for electrical and electronic equipment - Product requirements- Part 8-110: Power connectors - Detail specification for 2P 300 A 1 000 V plus 2P 5 A 50 V DC shielded rectangular connectors with IP65/IP68 degree of protection when mated and locked, and IPXXB when unmated

ICS 31.220.10

ISBN 978-2-8327-1397-6

IEC 61076-8-110:2026-08(en)

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2026 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD 4
1 Scope 7
2 Normative references 7
3 Terms and definitions 9
4 Technical information 9
4.1 Recommended method of termination 9
4.1.1 General 9
4.1.2 Number of contacts and contact cavities 10
4.2 Ratings and characteristics 10
4.3 Systems of levels 10
4.3.1 Performance levels 10
4.3.2 Compatibility levels 10
4.4 Classification into climatic categories 10
4.5 Clearance and creepage distance 11
4.6 Current-carrying capacity 11
4.7 Marking 11
5 Dimensional information 11
5.1 General 11
5.2 Isometric view and common features 11
5.2.1 Isometric view of fixed connector 11
5.2.2 Isometric view of free connector 12
5.3 Engagement (mating) information 12
5.3.1 General 12
5.3.2 Perpendicular to the engaging (mating) direction 12
5.3.3 Inclination 12
5.4 Fixed connectors 12
5.4.1 General 12
5.4.2 Dimensions 13
5.4.3 Terminations 15
5.5 Free connectors 15
5.5.1 General 15
5.5.2 Dimensions 16
5.5.3 Terminations 18
5.6 Accessories 18
5.7 Mounting information 18
5.8 Gauges – sizing gauges and retention force gauges 18
6 Technical characteristics 19
6.1 Classification into climatic categories 19
6.2 Electrical characteristics 20
6.2.1 Clearance and creepage distance 20
6.2.2 Voltage proof 20
6.2.3 Contact resistance 20
6.2.4 Housing (shell) electrical continuity and shielding effectiveness 20
6.2.5 Insulation resistance 21
6.2.6 Current-carrying capacity 21
6.2.7 Electrical load and temperature 21

6.3 Mechanical characteristics 22
6.3.1 Mechanical operation 22
6.3.2 Effectiveness of connector coupling devices 22
6.3.3 Gauge retention force (resilient contact) 22
6.3.4 Engaging and separating forces 22
6.3.5 Contact retention in insert 22
6.3.6 Polarizing and keying method 23
6.4 Dynamic stress tests 23
6.4.1 Vibration (sine) 23
6.4.2 Shock 23
6.4.3 Free fall (repeated) 23
6.4.4 IP degree of protection 24
6.4.5 Glow-wire flammability test method for end-products (GWEPT) 24
6.5 Climatic tests 24
6.5.1 Damp heat, steady state 24
6.5.2 Rapid change of temperature 24
6.5.3 Corrosion, salt mist 24
6.5.4 Dry heat 25
6.5.5 Cold 25
6.5.6 Low air pressure 25
6.6 Environmental aspects 25
6.6.1 Marking of insulation material (plastic) 25
6.6.2 Design and use of material 25
7 Test schedules 25
7.1 General 25
7.2 Basic (minimum) test schedule 26
7.3 Full test schedule 26
7.3.1 Test group P – Preliminary 26
7.3.2 Test group AP – Dynamic climatic 27
7.3.3 Test group BP – Mechanical endurance 29
7.3.4 Test group CP – Moisture 30
7.3.5 Test group DP – Heat and electrical load 31
7.3.6 Test group EP – Dynamic stress 32
7.3.7 Test group FP – Chemical resistivity 33
7.3.8 Test group GP – Manufacturing process robustness 33
7.3.9 Test group HP – Signal integrity and shielding effectiveness tests 34
7.3.10 Test group JP – Connection 34
7.3.11 Test group KP – Additional test 35
7.4 Test procedures and measurement methods 36
7.5 Pre-conditioning 36
7.6 Wiring and mounting of test specimens 36
7.6.1 Wiring 36
7.6.2 Mounting 36
Bibliography 37

Figure 1 – Fixed connector – isometric view 11
Figure 2 – Free connector – isometric view 12
Figure 3 – Fixed connector 13

Figure 4 – Fixed connector codings 15
Figure 5 – Free connector 16
Figure 6 – Free connector codings 17
Figure 7 – Gauge for signal contacts 19
Figure 8 – Gauge for power contacts 19
Figure 9 – Current-temperature derating (70 mm^2 wire size) 21

Table 1 – Climatic category 10
Table 2 – Dimensions of fixed connector 14
Table 3 – Dimensions of fixed connector codings 15
Table 4 – Dimensions of free connector 17
Table 5 – Dimensions of free connector codings 18
Table 6 – Dimensions of gauges 19
Table 7 – Voltage proof 20
Table 8 – Vibration 23
Table 9 – Number of test specimens 26
Table 10 – Test group P 26
Table 11 – Test group AP 27
Table 12 – Test group BP 29
Table 13 – Test group CP 30
Table 14 – Test group DP 31
Table 15 – Test group EP 32
Table 16 – Test group GP 33
Table 17 – Test group HP 34
Table 18 – Test group JP 34
Table 19 – Test group KP 35

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

Connectors for electrical and electronic equipment - Product requirements - Part 8-110: Power connectors - Detail specification for 2P 300 A 1 000 V DC plus 2P 5 A 50 V DC shielded rectangular connectors with IP65/IP68 degree of protection when mated and locked, and IPXXB when unmated

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61076-8-110 has been prepared by subcommittee 48B: Electrical connectors, of IEC technical committee 48: Electrical connectors and mechanical structures for electrical and electronic equipment. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
48B/3215/FDIS	48B/3221/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

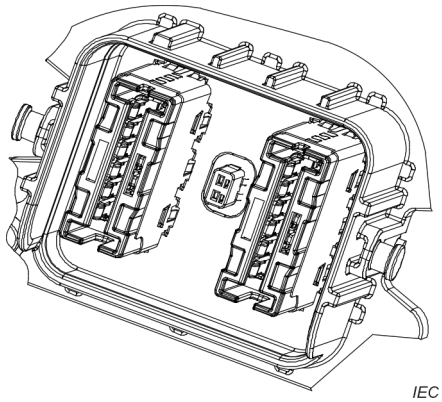
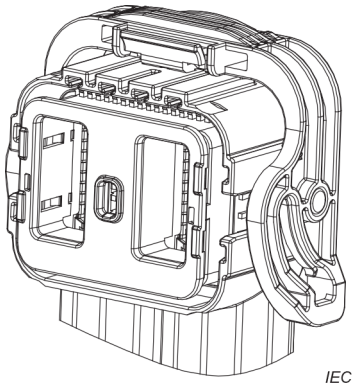
A list of all parts of IEC 61076 series, under the general title *Connectors for electrical and electronic equipment - Product requirements*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

– reconfirmed,

– withdrawn, or

– revised.

The International Electrotechnical Commission **IEC SC 48B – Electrical connectors**		**IEC 61076-8-110 Ed.1**
Detail specification in accordance with IEC 61076-1		
Fixed connector	 *IEC*	For rated current of 300 A, 1 000 V DC; 2P power plus 2P signal (5 A, 50 V DC); Female contacts for power; Female contacts for signal; Straight insertion and withdrawal; 360° shielding; Four codings to prevent mismating.
Free connector	 *IEC*	For rated current of 300 A, 1 000 V DC; 2P power plus 2P signal (5 A, 50 V DC); Male contacts for power; First break last make male contacts for signal; Straight insertion and withdrawal; 360° shielding; Four codings to prevent mismating.

1 Scope

This part of IEC 61076-8 describes free and fixed rectangular connectors, hereinafter referred to as "connector", with:

– 2P power plus 2P signal contacts;
– plastic housing with locking lever and four possible codings;
– 300 A rated current, 1 000 V DC rated voltage on the power section;
– 5 A rated current, 50 V DC rated voltage on the “first break, last make” signal section;
– individual shielding around each power contact with relevant shielding termination;
– IP65/IP68 degree of protection when mated and locked and IPXXB on both plug and receptacle parts when unmated,

for use in electrical and electronic equipment, including overall dimensions, interface dimensions, technical characteristics, performance requirements and test methods.

Connectors in accordance with this document are intended for use in class II equipment; hence, they are not equipped with PE contact.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-581, *International Electrotechnical Vocabulary (IEV) - Part 581: Electromechanical components for electronic equipment*

IEC 60068-1, *Environmental testing - Part 1: General and guidance*

IEC 60228, *Conductors of insulated cables*

IEC 60352 (all parts), *Solderless connections*

IEC 60512-1, *Connectors for electrical and electronic equipment - Tests and measurements - Part 1: Generic specification*

IEC 60512-1-1, *Connectors for electronic equipment - Tests and measurements - Part 1-1: General examination; Test 1a: Visual examination*

IEC 60512-1-2, *Connectors for electronic equipment - Test and measurements - Part 1-2: General examination - Test 1b: Examination of dimension and mass*

IEC 60512-2-1, *Connectors for electronic equipment - Tests and measurements - Part 2-1: Electrical continuity and contact resistance tests - Test 2a: Contact resistance - Millivolt level method*

IEC 60512-2-2, *Connectors for electronic equipment - Tests and measurements - Part 2-2: Electrical continuity and contact resistance tests - Test 2b: Contact resistance - Specified test current method*

IEC 60512-2-5, *Connectors for electronic equipment - Tests and measurements - Part 2-5: Electrical continuity and contact resistance tests; Test 2e: Contact disturbance*

IEC 60512-2-6, *Connectors for electronic equipment - Tests and measurements - Part 2-6: Electrical continuity and contact resistance tests - Test 2f: Housing (shell) electrical continuity*

IEC 60512-3-1, *Connectors for electronic equipment - Tests and measurements - Part 3-1: Insulation tests - Test 3a: Insulation resistance*

IEC 60512-4-1, *Connectors for electronic equipment - Tests and measurements - Part 4-1: Voltage stress tests - Test 4a: Voltage proof*

IEC 60512-5-2, *Connectors for electronic equipment - Tests and measurements - Part 5-2: Current-carrying capacity tests - Test 5b: Current-temperature derating*

IEC 60512-6-3, *Connectors for electronic equipment - Tests and measurements - Part 6-3: Dynamic stress tests - Test 6c: Shock*

IEC 60512-6-4, *Connectors for electronic equipment - Tests and measurements - Part 6-4: Dynamic stress tests - Test 6d: Vibration (sinusoidal)*

IEC 60512-7-1, *Connectors for electronic equipment - Tests and measurements - Part 7-1: Impact tests (free connectors) - Test 7a: Free fall (repeated)*

IEC 60512-9-1, *Connectors for electronic equipment - Tests and measurements - Part 9-1: Endurance tests - Test 9a: Mechanical operation*

IEC 60512-9-2, *Connectors for electronic equipment - Tests and measurements - Part 9-2: Endurance tests - Test 9b: Electrical load and temperature*

IEC 60512-11-1, *Connectors for electrical and electronic equipment - Tests and measurements - Part 11-1: Climatic tests - Test 11a - Climatic sequence*

IEC 60512-11-3, *Connectors for electronic equipment - Tests and measurements - Part 11-3: Climatic tests - Test 11c: Damp heat, steady state*

IEC 60512-11-4, *Connectors for electronic equipment - Tests and measurements - Part 11-4: Climatic tests - Test 11d: Rapid change of temperature*

IEC 60512-11-6, *Connectors for electronic equipment - Tests and measurements - Part 11-6: Climatic tests - Test 11f: Corrosion, salt mist*

IEC 60512-11-9, *Connectors for electronic equipment - Tests and measurements - Part 11-9: Climatic tests - Test 11i: Dry heat*

IEC 60512-11-10, *Connectors for electronic equipment - Tests and measurements - Part 11-10: Climatic tests - Test 11j: Cold*

IEC 60512-11-11, *Connectors for electronic equipment - Tests and measurements - Part 11-11: Climatic tests - Test 11k: Low air pressure*

IEC 60512-11-12, *Connectors for electronic equipment - Tests and measurements - Part 11-12: Climatic tests - Test 12m: Damp heat, cyclic*

IEC 60512-13-1, *Connectors for electronic equipment - Tests and measurements - Part 13-1: Mechanical operation tests - Test 13a: Engaging and separating forces*

IEC 60512-13-5, *Connectors for electronic equipment - Tests and measurements - Part 13-5: Mechanical operation tests - Test 13e: Polarizing and keying method*

IEC 60512-15-1, *Connectors for electronic equipment - Tests and measurements - Part 15-1: Connector tests (mechanical) - Test 15a: Contact retention in insert*

IEC 60512-15-6, *Connectors for electronic equipment - Tests and measurements - Part 15-6: Connector tests (mechanical) - Test 15f: Effectiveness of connector coupling devices*

IEC 60512-16-5, *Connectors for electronic equipment - Tests and measurements - Part 16-5: Mechanical tests on contacts and terminations - Test 16e: Gauge retention force (resilient contacts)*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP code)*
IEC 60529:1989/AMD1:1999
IEC 60529:1989/AMD2:2013

IEC 60695-2-11:2021, *Fire hazard testing - Part 2-11: Glowing/hot-wire based test methods - Glow-wire flammability test method for end-products (GWEPT)*

IEC 60999 (all parts), *Connecting devices - Electrical copper conductors - Safety requirements for screw-type and screwless-type clamping units*

IEC 61076-1, *Connectors for electronic equipment - Product requirements - Part 1: Generic specification*

IEC 61984:2008, *Connectors - Safety requirements and tests*

IEC 62153-4-6, *Metallic cables and other passive components test methods - Part 4-6: Electromagnetic compatibility (EMC) Surface transfer impedance - injection method*

ISO 6508-1, *Metallic materials - Rockwell hardness test - Part 1: Test method*

ISO 21920-1, *Geometrical product specifications (GPS) - Surface texture: Profile - Part 1: Indication of surface texture*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-581, IEC 61076-1, IEC 60512-1 and IEC 61984 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

– IEC Electropedia: available at https://www.electropedia.org/
– ISO Online browsing platform: available at https://www.iso.org/obp

4 Technical information

4.1 Recommended method of termination

4.1.1 General

It is recommended that termination be in accordance with the IEC 60352 series, IEC 60999-1 or IEC 60999-2.