IEC 63171-6

Edition 2.0 2021-10

INTERNATIONAL STANDARD

Connectors for electrical and electronic equipment – Part 6: Detail specification for 2-way and 4-way (data/power), shielded, free and fixed connectors for power and data transmission with frequencies up to 600 MHz

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.220.10

ISBN 978-2-8322-1030-7

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

CONTENTS

FOREWORD 5
1 Scope 8
2 Normative references 8
3 Terms and definitions 10
4 Common features and typical connector pair 11
4.1 Systems of levels – Compatibility levels 11
4.1.1 Performance level 11
4.1.2 Compatibility levels 11
4.2 Classification into climatic categories 11
4.3 Clearance and creepage distances 11
4.4 Current carrying capacity 11
4.5 Marking 11
4.6 Dimensional information 11
4.6.1 General 11
4.6.2 Isometric view and common features – Connector styles 11
4.6.3 Overall and mating dimensions by style 13
5 Characteristics 27
5.1 General 27
5.2 Classification into climatic category 27
5.3 Electrical characteristics 28
5.3.1 Creepage and clearance distances 28
5.3.2 Voltage proof 28
5.3.3 Voltage rating 28
5.3.4 Current-carrying capacity 28
5.3.5 Contact and shield resistance 30
5.3.6 Input to output DC resistance 30
5.3.7 Input to output DC resistance unbalanced 30
5.3.8 Insulation resistance 31
5.3.9 Impedance 31
5.4 Not used 31
5.5 Transmission performance 31
5.5.1 General 31
5.5.2 Insertion loss 31
5.5.3 Return loss 31
5.5.4 Propagation delay 31
5.5.5 Transverse conversion loss 31
5.5.6 Transverse conversion transfer loss 32
5.5.7 Transfer impedance 32
5.5.8 Coupling attenuation 32
5.5.9 Power sum alien (exogenous) NEXT 32
5.5.10 Power sum alien (exogenous) FEXT 32
5.6 Pin and pair grouping assignment 33
5.6.1 2-way data/power connector (see Figure 26) 33
5.6.2 4-way data/power M8 connector (see Figure 27) 33
5.7 Mechanical characteristics 34
5.7.1 Mechanical operation 34
5.7.2 Effectiveness of connector coupling devices 34

5.7.3 Insertion and withdrawal forces 35
5.7.4 Polarizing method 35
5.7.5 Vibration resistance 35
5.7.6 Mechanical shock resistance 35
5.7.7 IP degree of protection 36
6 Tests and test schedule 36
6.1 General 36
6.2 Test procedures and measuring methods 36
6.3 Mounting of specimens 36
6.3.1 General 36
6.3.2 Arrangement for contact resistance measurement 37
6.3.3 Arrangement for dynamic stress tests 37
6.3.4 Wiring of specimens 38
6.4 Test schedules 38
6.4.1 Basic (minimum) test schedule 38
6.4.2 Full test schedule 38
Bibliography 48

Figure 1 – Style 2J-L, overall dimensions 13
Figure 2 – Style 2J-L, mating dimensions 14
Figure 3 – Style 2P-L, overall dimensions 15
Figure 4 – Style 2P-L, mating dimensions 16
Figure 5 – Style 6J-S8, overall dimensions 17
Figure 6 – Style 6J-S8, mating dimensions 17
Figure 7 – Style 6P-S8, overall dimensions 18
Figure 8 – Styles 6J-P8 or 6J-M8, overall dimensions 19
Figure 9 – Style 6J-P8, size 8 push pull jack, mating dimensions 19
Figure 10 – Style 6J-M8, M8 thread jack, mating dimensions 20
Figure 11 – Styles 6P-P8, overall dimensions 21
Figure 12 – Style 6P-M8, overall dimensions, field attachable version (top), non field attachable version (bottom) 21
Figure 13 – Style 6P-M8, mating dimensions 22
Figure 14 – Styles 6J-P12, 6J-M12, 6J-C12, overall dimensions 22
Figure 15 –Styles 6J-C12, 6J-P12 and 6J-M12, mating dimensions 23
Figure 16 – Style 6P-M12, overall dimensions 24
Figure 17 – Style 6P-P12, overall dimensions 24
Figure 18 – Style 6J-M8C, overall dimensions 25
Figure 19 – Styles 6J-M8C, 6P-M8CI, mating dimensions 25
Figure 20 – Style 6J-M8CI, overall dimensions 26
Figure 21 – Styles 6J-M8CI, 6P-M8C, mating dimensions 26
Figure 22 – Style 6P-M8C, overall dimensions 27
Figure 23 – Style 6P-M8CI, overall dimensions 27
Figure 24 – Derating diagram for the Ø 0,5 mm data pins of the 2-way and 4-way connectors 29
Figure 25 – Derating diagram for the Ø 1 mm power pins of the 4-way connector 30
Figure 26 – Connector pin assignment for 2-way free connector, front view 33

Figure 27 – Connector pin assignment for 4-way M8 connector, front view 33
Figure 28 – Contact resistance arrangement 37
Figure 29 – Arrangement for vibration and mechanical shock tests 38

Table 1 – Connector styles 12
Table 2 – Geometrical position of planes 23
Table 3 – Climatic category 28
Table 4 – Current ratings of connectors 29
Table 5 – 2-way connector signal pin assignment 33
Table 6 – 4-way M8 connector signal pin assignment 34
Table 7 – Preferred values for the number of mating cycles 34
Table 8 – Preferred values for the pull-out force 35
Table 9 – Test group P 39
Table 10 – Test group AP 39
Table 11 – Test group BP 41
Table 12 – Test group CP 43
Table 13 – Test group DP 44
Table 14 – Test group EP 45
Table 15 – Test group FP 46
Table 16 – Test group GP 47

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

CONNECTORS FOR ELECTRICAL AND ELECTRONIC EQUIPMENT –

Part 6: Detail specification for 2-way and 4-way (data/power), shielded, free and fixed connectors for power and data transmission with frequencies up to 600 MHz

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This International Standard IEC 63171-6 has been prepared by subcommittee 48B: Electrical connectors, of IEC technical committee 48: Electrical connectors and mechanical structures for electrical and electronic equipment.

This second edition cancels and replaces the first edition published in 2020. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

a) Mating conditions changed, see Figure 2, Figure 4, Figure 13, Figure 15, Figure 19 and Figure 21.
b) Voltage proof requirement added, 2 250 V DC, see 5.7.2.
c) Mechanical shock requirement added, see 5.7.6 (the requirement itself already was specified indirectly by Ed1 due to the specification of the test EP3 of Table 14 which is still identical to Ed1).

d) Styles added, 6P-M8CI and 6J-M8CI, see Table 1.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
48B/2907/FDIS	48B/2917/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

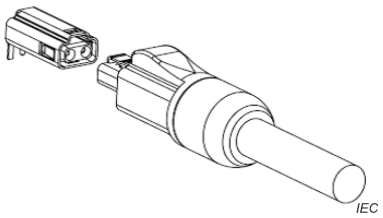
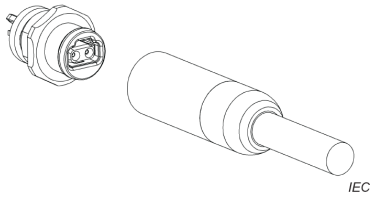
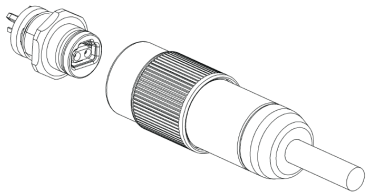
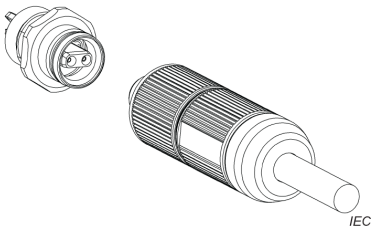
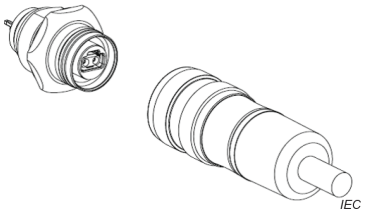
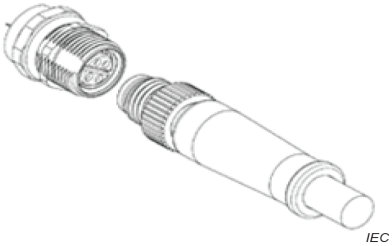
The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 63171 series, published under the general title *Connectors for electrical and electronic equipment*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IEC SC 48B – Electrical connectors **Specification available from: IEC General secretariat or from the addresses shown on the inside cover.**	**IEC 63171-6 Ed. 2**
DETAIL SPECIFICATION in accordance with IEC 61076-1	
	2-way data IP20, latch locking
	2-way data IP65/IP67, snap-in locking
	2-way data IP65/IP67, push-pull locking
	2-way data IP65/IP67, M8 screw locking
	2-way data IP65/IP67, M12 screw locking or push-pull locking (or both)
	4-way (2 power + 2 data) IP65/IP67, M8 screw locking

CONNECTORS FOR ELECTRICAL AND ELECTRONIC EQUIPMENT –

Part 6: Detail specification for 2-way and 4-way (data/power), shielded, free and fixed connectors for power and data transmission with frequencies up to 600 MHz

1 Scope

This document covers 2-way and 4-way (data/power), shielded, free and fixed connectors for data transmission with frequencies up to 600 MHz and specifies the common dimensions, mechanical, electrical and transmission characteristics and environmental requirements as well as test specifications.

NOTE 1 This 63171-6 document is not fully harmonized with the content and structure of IEC 63171. There are several specifications in both documents which are overlapping. In any case the provisions within this document prevail.

NOTE 2 The connectors are intended to be used for single-pair Ethernet (SPE) according to the following IEEE Standards: 10BaseT1 (IEEE 802.3cg), 100Base-T1 (IEEE 802.3bw), 1000Base-T1 (IEEE 802.3bp), and optionally with Power over Data line (PoDL) power supply according to IEEE 802.3bu.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-581, *International Electrotechnical Vocabulary (IEV) – Part 581: Electromechanical components for electronic equipment*

IEC 60068-1, *Environmental testing – Part 1: General and guidance*

IEC 60068-2-14, *Environmental testing – Part 2-14: Tests – Test N: Change of temperature*

IEC 60068-2-38, *Environmental testing – Part 2-38: Tests – Test Z/AD: Composite temperature/humidity cyclic test*

IEC 60352 (all parts), *Solderless connections*

IEC 60512-1, *Connectors for electrical and electronic equipment – Tests and measurements – Part 1: Generic specification*

IEC 60512-1-1, *Connectors for electronic equipment – Tests and measurements – Part 1-1: General examination – Test 1a: Visual examination*

IEC 60512-1-2, *Connectors for electronic equipment – Tests and measurements – Part 1-2: General examination – Test 1b: Examination of dimension and mass*

IEC 60512-2-1, *Connectors for electronic equipment – Tests and measurements – Part 2-1: Electrical continuity and contact resistance tests – Test 2a: Contact resistance – Millivolt level method*

IEC 60512-2-5, *Connectors for electronic equipment – Tests and measurements – Part 2-5: Electrical continuity and contact resistance tests – Test 2e: Contact disturbance*

IEC 60512-3-1, *Connectors for electronic equipment – Tests and measurements – Part 3-1: Insulation tests – Test 3a: Insulation resistance*

IEC 60512-4-1, *Connectors for electronic equipment – Tests and measurements – Part 4-1: Voltage stress tests – Test 4a: Voltage proof*

IEC 60512-5-2, *Connectors for electronic equipment – Tests and measurements – Part 5-2: Current-carrying capacity tests – Test 5b: Current-temperature derating*

IEC 60512-6-3, *Connectors for electronic equipment – Tests and measurements – Part 6-3: Dynamic stress tests – Test 6c: Shock*

IEC 60512-6-4, *Connectors for electronic equipment – Tests and measurements – Part 6-4: Dynamic stress tests – Test 6d: Vibration (sinusoidal)*

IEC 60512-9-1, *Connectors for electronic equipment – Tests and measurements – Part 9-1: Endurance tests – Test 9a: Mechanical operation*

IEC 60512-9-2, *Connectors for electronic equipment – Tests and measurements – Part 9-2: Endurance tests – Test 9b: Electrical load and temperature*

IEC 60512-11-3, *Connectors for electronic equipment – Tests and measurements – Part 11-3: Climatic tests – Test 11c: Damp heat, steady state*

IEC 60512-11-4, *Connectors for electronic equipment – Tests and measurements – Part 11-4: Climatic tests – Test 11d: Rapid change of temperature*

IEC 60512-11-7, *Connectors for electronic equipment – Tests and measurements – Part 11-7: Climatic tests – Test 11g: Flowing mixed gas corrosion test*

IEC 60512-11-9, *Connectors for electronic equipment – Tests and measurements – Part 11-9: Climatic tests – Test 11i: Dry heat*

IEC 60512-11-10*, Connectors for electronic equipment – Tests and measurements – Part 11-9: Climatic tests – Test 11j: Cold*

IEC 60512-11-12, *Connectors for electronic equipment – Tests and measurements – Part 11-12: Climatic tests – Test 11m: Damp heat, cyclic*

IEC 60512-13-2, *Connectors for electronic equipment – Tests and measurements – Part 13-2: Mechanical operation tests – Test 13b: Insertion and withdrawal forces*

IEC 60512-13-5, *Connectors for electronic equipment – Tests and measurements – Part 13-5: Mechanical operation tests – Test 13e: Polarizing and keying method*

IEC 60512-15-6, *Connectors for electronic equipment – Tests and measurements – Part 15-6: Connector tests (mechanical) – Test 15f: Effectiveness of connector coupling devices*

IEC 60512-25-7, *Connectors for electronic equipment – Tests and measurements – Part 25-7: Test 25g – Impedance, reflection coefficient, and voltage standing wave ratio (VSWR)*

IEC 60512-25-9, *Connectors for electrical equipment – Tests and measurements – Part 25-9: Signal integrity tests – Test 25i: Alien crosstalk*

IEC 60512-26-100, *Connectors for electronic equipment – Tests and measurements – Part 26-100: Measurement setup, test and reference arrangements and measurements for connectors according to IEC 60603-7 – Tests 26a to 26g*

IEC 60512-28-100, *Connectors for electrical and electronic equipment – Tests and measurements – Part 28-100: Signal integrity tests up to 2 000 MHz – Tests 28a to 28g*

IEC 60529, *Degrees of protection provided by enclosures (IP code)*

IEC 60603-7:2020, *Connectors for electronic equipment – Part 7: Detail specification for 8-way, unshielded, free and fixed connectors*

IEC 60664-1, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 61076-1:2006, *Connectors for electronic equipment – Product requirements – Part 1: Generic specification*

IEC 61076-2-010, *Connectors for electrical and electronic equipment – Product requirements – Part 2-010: Circular connectors – Detail specification for connectors with outer or inner push-pull locking mechanism, based on mating interfaces according to IEC 61076-2-101, IEC 61076-2-109, IEC 61076-2-111 and IEC 61076-2-113*

IEC 61076-2-101: *Connectors for electronic equipment – Product requirements – Part 2-101: Circular connectors – Detail specification for M12 connectors with screw-locking*

IEC 61076-3, *Connectors for electronic equipment – Product requirements – Part 3: Rectangular connectors – Sectional specification*

IEC 61156 (all parts), *Multicore and symmetrical pair/quad cables for digital communications*

IEC 61984, *Connectors – Safety requirements and tests*

IEC 62153-4-15*, Metallic communication cable test methods – Part 4-15: Electromagnetic compatibility (EMC) – Test method for measuring transfer impedance and screening attenuation – or coupling attenuation with triaxial cell*

IEC 63171:2021, *Connectors for electrical and electronic equipment – Shielded or unshielded free and fixed connectors for balanced single-pair data transmission with current-carrying capacity – General requirements and tests*