ISO/IEC 30188

Edition 1.0 2026-07

INTERNATIONAL STANDARD

Digital twin - Reference architecture

ICS 35.020

ISBN 978-2-8327-1379-2

ISO/IEC 30188:2026-07(en)

THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2026 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC
The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications
The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform
The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, …). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished
Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc
If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch
Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org
The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD 3
INTRODUCTION 4
1 Scope 7
2 Normative references 7
3 Terms and definitions 7
4 Abbreviated terms 9
5 Specifying an architecture for digital twins 10
6 Foundational viewpoint 10
6.1 Stakeholders and concerns 10
6.1.1 General 10
6.1.2 Stakeholders 10
6.1.3 Concerns 10
6.2 Views and models 11
6.2.1 General 11
6.2.2 Conceptual models 11
6.2.3 Physical target entity 13
6.2.4 Digital target entity 13
6.2.5 Combined physical and digital target entity 14
6.2.6 Lifecycle model 14
7 Functional viewpoint 16
7.1 Stakeholders and concerns 16
7.1.1 General 16
7.1.2 Stakeholders 16
7.1.3 Concerns 16
7.2 Views and models 16
7.2.1 General 16
7.2.2 Design and development stage 17
7.2.3 Deployment stage 18
7.2.4 Operation stage 18
7.2.5 Retirement stage 19
8 Implementation viewpoint 19
8.1 Stakeholders and concerns 19
8.1.1 General 19
8.1.2 Stakeholders 19
8.1.3 Concerns 19
8.2 Views and models 19
8.2.1 General 19
8.2.2 Implementation of interfaces 20
8.2.3 Implementation of interoperability 21
8.2.4 Implementation of models 22
Annex A (normative) Architecture pattern viewpoint 24
A.1 Stakeholders and concerns 24
A.1.1 General 24
A.1.2 Stakeholders 24
A.1.3 Concerns 24
A.2 Views and models 24

A.2.1 General 24
A.2.2 Construction model 25
A.2.3 Using views and models from other reference architectures 26
A.3 Examples of patterns 27
A.3.1 Template 27
A.3.2 Sensing and actuating pattern 28
A.3.3 Smart manufacturing RAMI reference model pattern 30
A.3.4 Maturity pattern 31
A.3.5 Framework for manufacturing pattern 32
Bibliography 34

Figure 1 – How to use this document 5
Figure 2 – Used architecture views 6
Figure 3 – Twinning model 12
Figure 4 – Synchronization model 12
Figure 5 – Digital twin for a physical target entity 13
Figure 6 – Digital twin for a digital target entity 13
Figure 7 – Digital twin for a combined physical and digital target entity 14
Figure 8 – Full lifecycle twinning 15
Figure 9 – Example of partial lifecycle twinning 16
Figure 10 – Business and usage interface model 20
Figure 11 – Inner and outer interoperability 21
Figure 12 – Transversal interoperability 21
Figure 13 – Model construction processes 23
Figure A.1 – Digital twin architecture construction model 25
Figure A.2 – Relationship between IoT component, IoT system and IoT environment 28
Figure A.3 – IoT component capability 29
Figure A.4 – RAMI architecture model 30
Figure A.5 – ISO/IEC 30186 [11] maturity model 31
Figure A.6 – ISO 23247-2:2021 [17] architecture 32
Figure A.7 – ISO 23247 series [19] 33

Table 1 – Capabilities in the design and development stage 17
Table 2 – Capabilities in the deployment stage 18
Table 3 – Capabilities in the operation stage 18
Table 4 – Capabilities in the retirement stage 19
Table A.1 – Example of additional views for IoT-related digital twins 26
Table A.2 – Architecture pattern template 27
Table A.3 – Sensing and actuating pattern legend 28
Table A.4 – Smart manufacturing RAMI reference model pattern 30
Table A.5 – Digital twin maturity pattern 31
Table A.6 – Framework from manufacturing pattern 32

Digital twin - Reference architecture

FOREWORD

1) ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.
2) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO National bodies.
3) IEC and ISO documents have the form of recommendations for international use and are accepted by IEC and ISO National bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC and ISO documents is accurate, IEC and ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC and ISO National bodies undertake to apply IEC and ISO documents transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC and ISO document and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC and ISO do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC and ISO marks of conformity. IEC and ISO are not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this document.
7) No liability shall attach to IEC and ISO or their directors, employees, servants or agents including individual experts and members of its technical committees and IEC and ISO National bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this ISO/IEC document or any other IEC and ISO documents.
8) Attention is drawn to the Normative references cited in this document. Use of the referenced publications is indispensable for the correct application of this document.
9) IEC and ISO draw attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC and ISO take no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC and ISO had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch and www.iso.org/patents. IEC and ISO shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 30188 has been prepared by subcommittee 41: Internet of Things and Digital Twin, of ISO/IEC joint technical committee 1: Information technology. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
JTC1-SC41/598/FDIS	JTC1-SC41/621/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1, and the ISO/IEC Directives, JTC 1 Supplement available at www.iec.ch/members_experts/refdocs and www.iso.org/directives.

INTRODUCTION

The term digital twin can be used to refer to a technology domain. This is the case in the title of this document. Digital twin as a technology joins the real world and the digital world now found in many domains of manufacturing, cities, agriculture, energy, buildings, healthcare, etc., and product categories such as appliances, automobiles, machine tools, and building security. This technology is applied, for example, by the following:

– manufacturing companies to simulate and predict products and product lines, resulting in production cycle reduction and cost reduction;

– city planners to optimize city development based on simulation models, and realize visualization, convenience and intelligent city management;

– agricultural producers to monitor and optimize production operations, and perform predictive diagnosis on agricultural machinery and equipment;

– energy managers to achieve visual monitoring and management of energy production and transmission processes, as well as fault analysis and remote operation and maintenance;

– building operators to achieve energy conservation, environmental protection, lower operation cost and intelligent management of constructed buildings;

– doctors to monitor patients' real-time conditions, providing personalized medical solutions, dynamically optimizing medical resources.

Relevant application domains and standardization bodies for digital twin technology include, among others, the following:

– smart energy with IEC TC 57, IEC SyC Smart Energy;

– smart cities with IEC SyC Smart Cities, ISO/TC 268, ISO/IEC JTC 1/WG 11;

– farming with ISO/TC 23/SC 19, ITU-T;

– building with ISO/TC 59/SC 13;

– healthcare with ISO/TC 215;

– manufacturing with ISO/TC 184/SC 4, IEC TC 65/JWG 21, IEC SyC Smart Manufacturing, IEEE Computer Society Smart Manufacturing Standards Committee – Digital Representation Working Group.

Specific technical areas and related standardization bodies for a digital twin include, among others, the following:

– architecture (and lifecycle management) with ISO/IEC JTC 1/SC 7;

– modelling (and product properties) with ISO/IEC JTC 1/SC 7, ISO TC 184/SC 4, IEC SC 3D;

– simulation with IEEE 1516, SISO (Simulation Interoperability Standards Organization);

– automatic identification (and data capture) with ISO/IEC JTC 1/SC 31;

– augmented reality and virtual reality with ISO/IEC JTC 1/AG 13, ISO/IEC JTC 1/SC 24, IEEE P2048;

– Internet of Things with ISO/IEC JTC 1/SC 41;

– artificial intelligence with ISO/IEC JTC 1/SC 42;

– information technology security with ISO/IEC JTC 1/SC 27;

– privacy with ISO/IEC JTC 1/SC 27, and ISO/IEC JTC 1/SC 44;

– cloud computing with ISO/IEC JTC 1/SC 38.

The term digital twin can also be used to refer to the digital representation of a target entity. This is the case in a reference architecture description of a system of interest which involves digital twins.

Figure 1 depicts conceptual artefacts involved in the development of a system involving digital twin technologies:

– input and output items (ellipses in Figure 1):
  - stakeholder expectations and concerns as input, and
  - the system involving digital twin technologies as output;

NOTE 1 Stakeholder expectations and concerns can include requirements for governance models.

– standard items (round rectangles in Figure 1) which enable architecture processes:
  - ISO/IEC/IEEE 42010 [1][1],
  - this document, and
  - associated architecture patterns;

NOTE 2 Architecture patterns can include other reference architecture standards such as ISO/IEC 30141 [2].

– work product items or output of processes (rectangles in Figure 1):
  - stakeholder needs and requirements,
  - system requirements and
  - the architecture description;

– processes (horizontal bars in Figure 1).

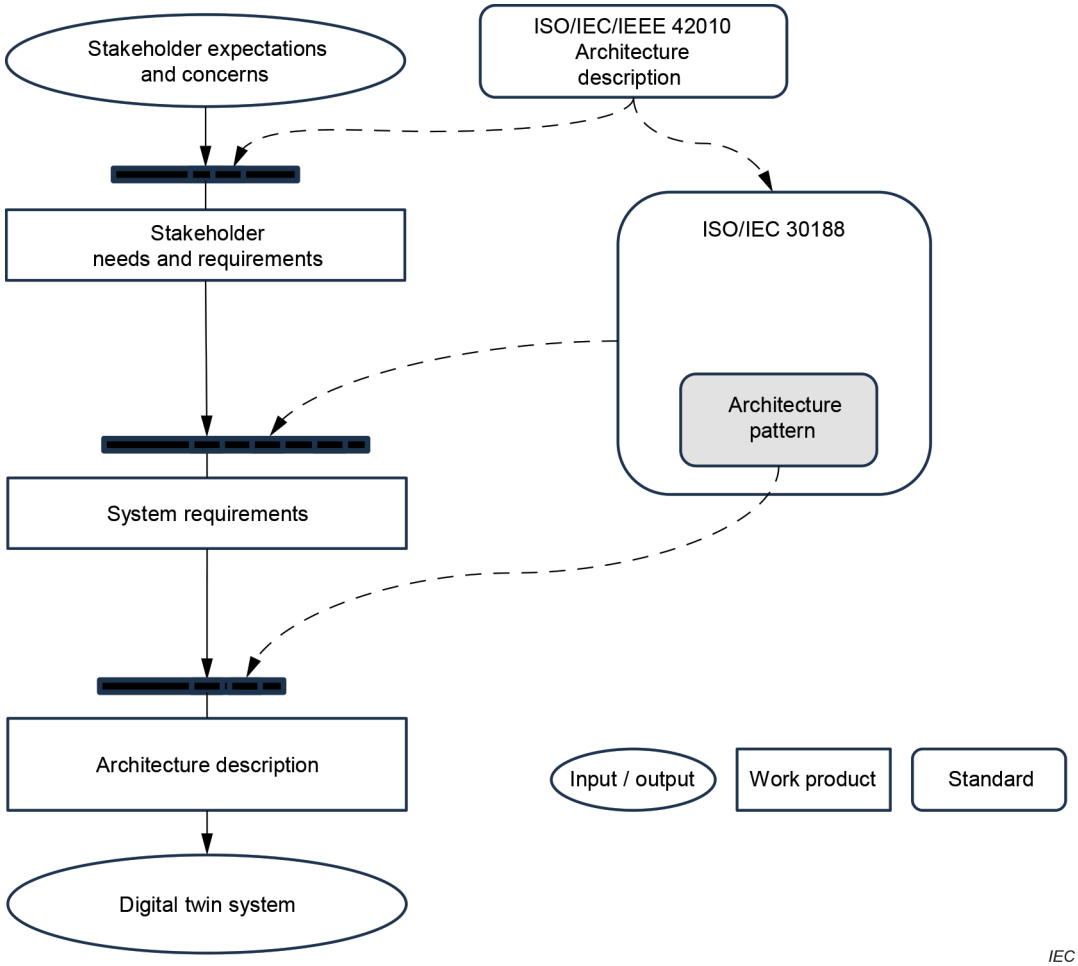


Figure 1 – How to use this document

[1] Numbers in square brackets refer to the Bibliography.

The target audience of this document are digital twin architects and engineers, digital twin project or programme managers, digital twin business managers, or digital twin owners, of all domains (application domains or technology domains).

Figure 2 shows the architecture views that are defined in this document:

– the foundational view covers the conceptual models (twinning model, synchronization model) and the lifecycle model;
– the functional view covers capabilities in the design and development, the deployment, the operation and the retirement stages;
– the implementation view covers the implementation of the usage and business interface, the implementation of interoperability, and the implementation of models;
– the architecture pattern view covers the construction model which can be used to extend an architecture.

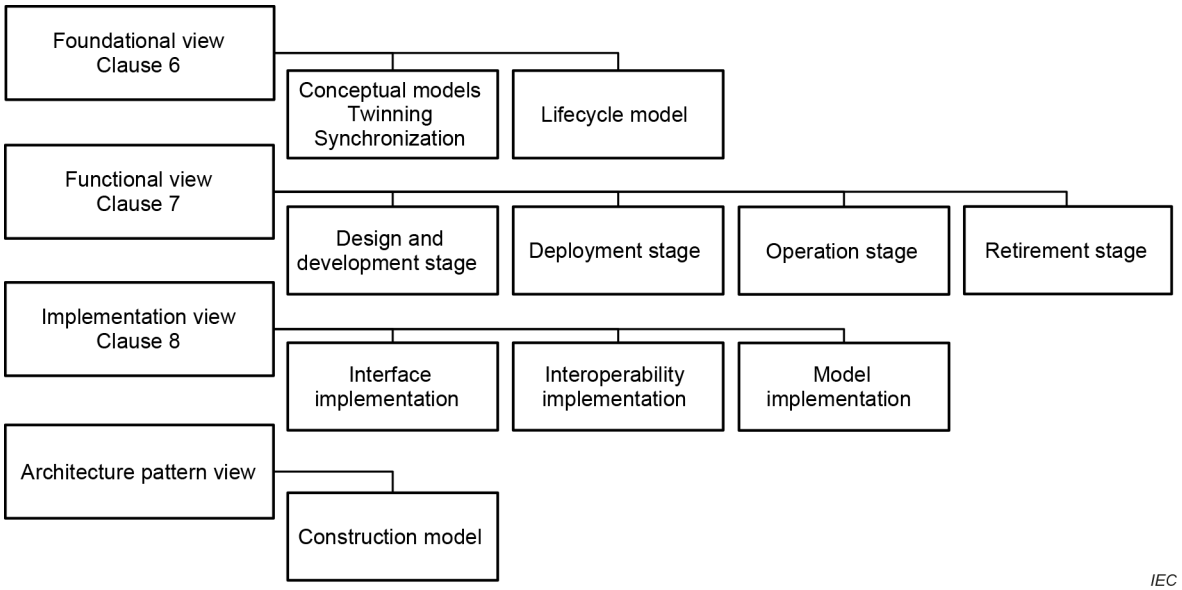


Figure 2 – Used architecture views

NOTE 3 While this document focuses on reference architecture considerations related to digital twins, it does not elaborate on concept relationships (e.g. digital twin as a technology, digital twin as a representation, digital twin in a system).

NOTE 4 This document does not address security and privacy of digital twins. These can be addressed in specific architecture patterns.

1 Scope

This document specifies a general reference architecture for a digital twin system in terms of defining system fundamentals through the use of architecture views.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

– IEC Electropedia: available at https://www.electropedia.org/

– ISO Online browsing platform: available at https://www.iso.org/obp

3.1
digital twin
DTw
digital representation of a target entity (3.2) with data connections that enable convergence at an appropriate rate of synchronization between the state of the target entity and the state of that digital representation

Note 1 to entry: Digital twin has some or all of the capabilities of connection, integration, analysis, simulation, visualization, optimization, collaboration, etc.

Note 2 to entry: Digital twin can provide an integrated view throughout the lifecycle of the target entity.

[SOURCE: ISO/IEC 30173:2023 [3], 3.1.1, modified – In the definition, "between the physical and digital states" has been replaced with "between the state of the target entity and the state of that digital representation" and the word order has been modified.]

3.2
target entity
entity (3.11) that is of interest for a digital twin (3.1)

Note 1 to entry: The target entity can be physical, digital, or both.

3.3
entity of interest
subject of an architecture description

EXAMPLE Enterprise, organization, solution, system (including software systems), subsystem, process, business, data (as a data item or data structure), application, information technology (as a collection), mission, product, service, software item, hardware item, product line, family of systems, system of systems, collection of systems, collection of applications.

Note 1 to entry: In this document, the term entity of interest refers to the entity whose architecture is under consideration in the preparation of an architecture description.

Note 2 to entry: This document distinguishes the entity of interest from other entities which are not the subject of the architecture description.

Note 3 to entry: In this document, interest in an entity is intended to encompass interest in that entity's environment, lifecycle, architecture, requirements, design, implementation and operation. Such interests are captured via aspects, concerns and stakeholder perspectives.

[SOURCE: ISO/IEC/IEEE 42010:2022 [1], 3.12]

3.4
architecture view
information part comprising portion of an architecture description

[SOURCE: ISO/IEC/IEEE 42010:2022 [1], 3.7, modified – The example has been deleted.]

3.5
architecture viewpoint
set of conventions for the creation, interpretation and use of an architecture view (3.4) to frame one or more concerns

[SOURCE: ISO/IEC/IEEE 42010:2022 [1], 3.8, modified – The notes to entry have been deleted.]

3.6
capability
measure of capacity and ability of an entity (3.11) (system, person or organization) to achieve its objectives

[SOURCE: ISO/IEC TS 5723:2022 [4], 3.3.2, modified – In the definition, “and the ability” has been replaced by “and ability”.]

3.7
observable entity
observable element
entity (3.11) in the environment (3.9) of the target entity (3.2) which can be observed and modelled in the digital twin (3.1)

EXAMPLE 1 The human body is the observable entity of a healthcare digital twin.

EXAMPLE 2 An observable manufacturing element (e.g. personnel, equipment, material, process, facility, environment, or product) is an observable entity.

Note 1 to entry: An observable entity can be physical or digital.

Note 2 to entry: A target entity is also a type of observable entity.

3.8
observation data
data resulting from the monitoring and measurement of an observable entity (3.7)

3.9
environment
context of surrounding things, conditions, or influences upon an entity (3.11)

Note 1 to entry: The environment of an entity of interest (3.3) includes external entities that can have various influences upon an entity, such as developmental, technological, business, operational, organizational, political, economic, legal, regulatory, ecological and social influences as well as external physical effects such as electromagnetic radiation, charged particles, gravitational effects, and electric and magnetic fields.

Note 2 to entry: A label attached as a qualifier to the word environment identifies a particular sub-context within that environment, such as development environment, test environment, and operational environment.

Note 3 to entry: “Influences upon” is a bi-directional relationship.

[SOURCE: ISO/IEC/IEEE 42010:2022 [1], 3.13, modified – Note 3 to entry has been added.]

3.10
architecture pattern
general, reusable solution to common architecture challenges encountered during the design of an entity of interest (3.3)

Note 1 to entry: A reference architecture is a type of architecture pattern.

3.11
entity
anything perceivable or conceivable

[SOURCE: ISO 9000:2015 [5], 3.6.1, modified – The preferred terms "object" and "item", the example and the note to entry have been deleted.]

3.12
system
arrangement of parts or elements that together exhibit a stated behaviour or meaning that the individual constituents do not

[SOURCE:ISO/IEC/IEEE 15288:2023 [6], 3.46, modified – The notes to entry have been deleted.]

3.13
stage
period within the lifecycle of an entity (3.11) that relates to the state of its description or realization

Note 1 to entry: As used in this document, stages relate to major progress and achievement milestones of the entity through its lifecycle.

Note 2 to entry: Stages often overlap.

[SOURCE: ISO/IEC/IEEE 15288:2023 [6], 3.43]

3.14
twinning
pairing a digital twin (3.1) with a target entity (3.2)

3.15
synchronization
<digital twin> action of making the states of digital twin (3.1) and target entity (3.2) synchronized

4 Abbreviated terms

AI	artificial intelligence
DTw	digital twin
IoT	Internet of Things
IT	information technology
OT	operational technology