IEC 61375-2-3

Edition 1.0 2015-07

INTERNATIONAL STANDARD

colour inside

Electronic railway equipment – Train communication network (TCN) – Part 2-3: TCN communication profile

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 45.060

ISBN 978-2-8322-2775-6

Warning! Make sure that you obtained this publication from an authorized distributor.

® Registered trademark of the International Electrotechnical Commission

CONTENTS

FOREWORD 13
INTRODUCTION 15
1 Scope 16
2 Normative references 17
3 Terms, definitions, abbreviations, acronyms, and conventions 18
3.1 Terms and definitions 18
3.2 Abbreviations and acronyms 26
3.3 Conventions 28
3.3.1 Base of numeric values 28
3.3.2 Character strings and citations 28
3.3.3 Naming conventions 29
3.3.4 Diagram conventions 29
3.3.5 Annotation of data structures 29
4 Architecture 30
4.1 General 30
4.2 Physical train architecture (system breakdown) 31
4.2.1 General 31
4.2.2 Train network architectures 31
4.2.3 Closed Trains 34
4.2.4 Directions 36
4.2.5 Consist and vehicle basic properties 37
4.3 Logical Train Architecture (Functional Breakdown) 38
4.3.1 General 38
4.3.2 Service classification 38
4.3.3 Operational Services Overview 39
4.3.4 Service Provider 39
5 Common ETB framework 39
5.1 General 39
5.1.1 Overview 39
5.1.2 Interoperability 40
5.2 CSTINFO telegram 40
5.2.1 General 40
5.2.2 Closed train support (Option) 40
5.2.3 Protocol 40
5.2.4 CSTINFO classes 40
5.2.5 CSTINFO Notification Message 41
5.2.6 CSTINFO Request 42
5.3 Train topology database 44
5.3.1 General 44
5.3.2 Computation of the TTDB 46
5.3.3 Data structure 50
5.3.4 Train Topology Database for multiple ETBs (Option) 59
5.4 Service Addressing 61
5.4.1 General 61
5.4.2 TCN Domain Name System (TCN-DNS) 61
5.4.3 TCN Domain Names 62

5.4.4 TCN-URI Scheme 63
5.4.5 Mapping TCN-URI to IP address 69
5.4.6 Support of other URI schemas 73
5.5 TCN-DNS Server 73
5.5.1 General 73
5.5.2 Architecture 73
5.5.3 Functional address resolution 73
5.5.4 Protocol 76
5.5.5 Multiple ETBs 77
5.6 Data exchange 77
5.6.1 General 77
5.6.2 Operational network communication 77
5.6.3 OMTS network communication 78
5.6.4 Quality of Service (QoS) 78
5.7 Service discovery 78
5.8 Train Info Service 78
6 Services of the communication profile – ETB Control Service 78
6.1 General 78
6.2 Communication model 79
6.3 ECSP Supervision 79
6.4 ECSP Interconnection 79
6.4.1 General 79
6.4.2 ETBCTRL telegram exchange selection 80
6.4.3 ETBCTRL telegram transmission 80
6.4.4 Structure of the ETBCTRL telegram 80
6.4.5 Operational train directory computation process 83
6.5 Function “Leading” 86
6.5.1 General 86
6.5.2 Function primitives 86
6.5.3 ECSP to ECSP protocol 88
6.6 Function Confirmation/Correction 92
6.6.1 General 92
6.6.2 Function primitives 92
6.6.3 ECSP to ECSP protocol 94
6.6.4 State diagram 97
6.6.5 ECSC Failure 99
6.7 Computation of the operational train directory 99
6.7.1 General 99
6.7.2 Action setCorrInfo 100
6.7.3 Action computeOpTrnDir 103
6.8 Function Sleep Mode (Option) 106
6.8.1 General 106
6.8.2 Sleep Mode Use Case (informal) 106
6.8.3 Exclusivity 108
6.8.4 Function primitives 108
6.8.5 ECSP to ECSP protocol 110
Annex A (normative) Train Real-Time Data Protocol (TRDP) 114
A.1 General 114
A.2 Lower Layers 114

A.2.1 Data link layer 114
A.2.2 Network Layer 114
A.2.3 Transport Layer 115
A.3 TRDP FCS Computation 116
A.4 Interaction between TRDP user and TRDP Layer 118
A.5 Communication Identifier (ComId) 118
A.6 Process Data 120
A.6.1 Communication model 120
A.6.2 Roles 120
A.6.3 Communication pattern 120
A.6.4 Addressing 125
A.6.5 PD-PDU 125
A.6.6 Interaction between application and TRDP protocol layer 128
A.6.7 Topography counter check 135
A.6.8 State Machine 136
A.7 Message Data 140
A.7.1 Communication model 140
A.7.2 Roles 141
A.7.3 Communication pattern 141
A.7.4 Addressing 142
A.7.5 MD-PDU 142
A.7.6 Interaction between application and TRDP layer 145
A.7.7 Topography counter check 150
A.7.8 MD protocol state machine 151
A.7.9 TCP Connection Handling 160
A.8 Message data echo server (option) 161
Annex B (normative) Safe Data Transmission (SDTv2) 162
B.1 General 162
B.2 Overview of SDTv2 (informal) 162
B.3 Safety functional requirements 163
B.4 Safety measures 163
B.5 Operational states of the SDTv2 channel 164
B.6 Data presentation 165
B.7 SC-32 165
B.8 SID 168
B.9 Vital Data Packet 169
B.10 Exclusivity 170
B.11 Configuration time parameters 170
B.12 Safe data source (SDSRC) 170
B.12.1 General 170
B.12.2 Safe Data Preparation (Application) 170
B.12.3 Safe data sending 171
B.13 Safe data sink (SDSINK) 172
B.13.1 General 172
B.13.2 Definitions 173
B.13.3 SDSINK States 174
B.13.4 VDP Sampling 175
B.13.5 VDP Integrity Check 176
B.13.6 Sink time supervision 177

B.13.7 Guard time check 177
B.13.8 Latency monitoring 178
B.13.9 Channel monitoring 180
B.13.10 SDTv2 Application Interface 182
B.13.11 Change of operational train composition 182
B.14 Diagnosis and statistics 182
B.15 Safe data transmission over MVB (informative) 183
B.15.1 General 183
B.15.2 MVB-VDP 183
B.15.3 SDTV2 protocol deviations for MVB 184
B.16 SDTv2 with TRDP message data 184
Annex C (informative) Train Real-Time Data Protocol Configuration (TRDP) 185
C.1 General 185
C.2 Device Parameters 186
C.3 Device Configuration Parameters 187
C.4 Bus Interface List 187
C.4.1 General 187
C.4.2 Bus Interface Configuration 188
C.5 Mapped Device Parameters 199
C.5.1 General 199
C.5.2 Mapped Bus Interface Parameters 200
C.6 Communication Parameters (ComPar) 202
C.6.1 General 202
C.6.2 Default Communication Parameters 203
C.7 DataSet Parameters 203
C.7.1 General 203
C.7.2 DataSet Element 205
C.7.3 Examples of DataSets 207
Annex D (informative) Access to End Device (ED) statistics 211
D.1 General 211
D.2 Structures 211
D.2.1 General 211
D.2.2 tlc_getSubsStatistics 213
D.2.3 tlc_getPubStatistics 213
D.2.4 tlc_getUdpListStatistics, tlc_getTcpListStatistics 213
D.2.5 tlc_getRedStatistics 214
D.3 ED interface for statistic data access 214
D.3.1 General 214
D.3.2 TRDP interface 214
Annex E (informative) Service interface 216
E.1 General 216
E.2 Service provider 217
E.2.1 Proxies 217
E.2.2 Performance 217
E.3 ECSP interface 217
E.3.1 General 217
E.3.2 ECSP control telegram 217
E.3.3 ECSP status telegram 219
E.3.4 ECSP Confirmation/Correction Request 221

E.4 TTDB manager interface 224
E.4.1 General 224
E.4.2 TTDB status information 224
E.4.3 TTDB notification 225
E.4.4 TTDB information – train directory 225
E.4.5 TTDB information – static consist information 226
E.4.6 TTDB information – train network directory information 227
E.4.7 Operational train directory information 228
E.4.8 Read TTDB 229
E.5 DNS server interface 230
E.5.1 DNS standard interface 230
E.5.2 DNS TCN interface 230
E.6 ETBN control interface 234
E.6.1 General 234
E.6.2 ETBN control and status data 235
E.6.3 ETBN train network directory 238
Annex F (normative) Communication profile conformance test guideline 240
F.1 General 240
F.2 Scope of conformance test 240
F.3 Conformance test overview 241
F.4 Test laboratory 241
F.4.1 General 241
F.4.2 Tasks 241
F.5 Guideline for writing conformance test specifications 242
F.5.1 Overview of the main components 242
F.5.2 Protocol Implementation Conformance Statement (PICS) 242
F.5.3 Abstract test architecture 243
F.5.4 Protocol Implementation eXtra Information for Testing (PIXIT) 243
F.5.5 Test suite structure 243
F.6 Abstract test architecture (option) 243
F.6.1 General 243
F.6.2 Test architecture with one ETB 244
F.6.3 Test architecture for multiple ETB 244
F.6.4 Set-up for automatic test 244
F.7 Test of conformity to the common ETB framework 245
F.7.1 General 245
F.7.2 Test of CSTINFO telegram 245
F.7.3 Test of TTDB 245
F.7.4 Test of service addressing and TCN-DNS server 245
F.7.5 Test of data exchange 246
F.7.6 Test of service discovery 247
F.7.7 Test of train info service 247
F.8 ETB Control Service conformity test 247
F.8.1 General 247
F.8.2 Test control interface for the test of ETB control services 247
F.9 Echo function 255
F.9.1 General 255
F.9.2 TRDP echo test 255
F.9.3 Reverse-Echo test 256

F.10 Statement of conformity 257
Annex G (informative) SNMP Management Information Base (MIB) 259
G.1 General 259
G.2 TTDB-MIB 259
G.3 TRDP-MIB 264
Bibliography 275

Figure 1 – IEC 61375-2-3 as connecting element between train backbone and application 17
Figure 2 – Train structure in accordance to IEC 61375-1 (example) 31
Figure 3 – Train structure seen from viewpoint of the communication profile (example) 31
Figure 4 – Train network (example) 32
Figure 5 – Possible couplings of operational network and multimedia network 33
Figure 6 – Gateway between operational network and multimedia network (example) 34
Figure 7 – Example: three coupled Consists 35
Figure 8 – Example: Closed Train 35
Figure 9 – Service classification 38
Figure 10 – CSTINFO notification data 42
Figure 11 – CSTINFOCTRL telegram 44
Figure 12 – TTDB management block diagram 44
Figure 13 – TTDB Content 45
Figure 14 – TTDB computation block diagram 46
Figure 15 – Train directory computation state diagram 47
Figure 16 – TTDB class diagram (example) 51
Figure 17 – TTDB adoption (in this example shown for the first consist) 60
Figure 18 – TCN-DNS name space with division into zones 62
Figure 19 – TCN-URI Schema 64
Figure 20 – Directions, orientations and numbers in train 65
Figure 21 – TCN-URI resolving in a train 74
Figure 22 – DNS protocol (case a without, case b with TTDB interrogation) 76
Figure 23 – ETB control service model 79
Figure 24 – ETBCTRL telegram exchange 80
Figure 25 – ETBCTRL telegram 81
Figure 26 – Operational train directory computation block diagram 84
Figure 27 – ETBCTRL processing state diagram 85
Figure 28 – Leading sequence diagram 87
Figure 29 – Leading vehicle function state machine block diagram 89
Figure 30 – State diagram of leading function 90
Figure 31 – Confirmation sequence diagram 93
Figure 32 – Confirmation/correction function state machine block diagram 94
Figure 33 – Correction/confirmation protocol sequence chart (example) 96
Figure 34 – Unconfirm protocol sequence chart (example) 97
Figure 35 – Confirmation/correction state diagram 98
Figure 36 – Action “setCorrInfo” block diagram 100

Figure 37 – Train composition consistency check examples 103
Figure 38 – Computation of the operational train directory 104
Figure 39 – computeOpTrnDir state chart 105
Figure 40 – Use case “sleep mode” state diagram 108
Figure 41 – Sleep control sequence diagram 109
Figure 42 – Sleep control function state machine block diagram 110
Figure 43 – Sleep request protocol sequence chart (example) 111
Figure 44 – Sleep control state diagram 112
Figure A.1 – Overview of the protocol stack 114
Figure A.2 – FCS Computation 116
Figure A.3 – FCS Table 117
Figure A.4 – TRDP service model 118
Figure A.5 – PD push pattern (point to point) 121
Figure A.6 – PD push pattern (point to multipoint) 121
Figure A.7 – PD pull pattern (point to point, sink knows source) 122
Figure A.8 – PD pull pattern (multipoint to point, sink does not know source) 123
Figure A.9 – PD pull pattern (point to multipoint, sink knows source) 124
Figure A.10 – PD pull pattern (multipoint to multipoint, sink does not know source) 125
Figure A.11 – PD-PDU 126
Figure A.12 – Interaction sequence chart for PD pull pattern 133
Figure A.13 – Interaction sequence chart for PD push pattern 134
Figure A.14 – Interaction sequence chart for redundant PD handling 135
Figure A.15 – PD State diagram publisher 136
Figure A.16 – PD State diagram requester 138
Figure A.17 – PD State diagram subscriber 139
Figure A.18 – Message data transfer options 141
Figure A.19 – MD-PDU 142
Figure A.20 – Interaction sequence chart 149
Figure A.21 – TRDP layer MD caller state chart 153
Figure A.22 – TRDP layer MD replier state chart 156
Figure A.23 – TRDP Layer MD telegram reception 159
Figure B.1 – SDTV2 Channel 162
Figure B.2 – SDTv2 Channel States 165
Figure B.3 – SC-32 Computation 166
Figure B.4 – SC-32 Table 167
Figure B.5 – SID Computation 168
Figure B.6 – ETB-VDP 169
Figure B.7 – Format of ETB-VDP 170
Figure B.8 – Redundancy Group (Example with 2 SDSRC) 172
Figure B.9 – SDSINK state diagram 174
Figure B.10 – Window of expected SSC (example) 176
Figure B.11 – Guard time violation (example) 178
Figure B.12 – Latency violation sequence chart (example) 179

Figure B.13 – MVB-VDP 183
Figure B.14 – Format of MVB-VDP 184
Figure C.1 – TRDP configuration block diagram 185
Figure C.2 – Exchange Parameters with the central key ComId 193
Figure C.3 – DataSet structure 204
Figure D.1 – TRDP statistics data telegrams 214
Figure E.1 – Service interfaces block diagram 216
Figure E.2 – ECSP interface telegrams 217
Figure E.3 – ECSP control data 218
Figure E.4 – ECSP status data 219
Figure E.5 – ECSP confirm/correction request data 222
Figure E.6 – ECSP confirm/correction reply data 223
Figure E.7 – TTDB manager interface telegrams 224
Figure E.8 – TCN-URI resolving 230
Figure E.9 – DNS resolving request data 232
Figure E.10 – DNS resolving reply data 233
Figure E.11 – ETBN control interface telegrams 234
Figure E.12 – ETBN control request data 235
Figure E.13 – ETBN status reply data 236
Figure F.1 – Consist interface on ETB level 240
Figure F.2 – Scope of conformance test 241
Figure F.3 – Abstract test architecture (1 ETB) 244
Figure F.4 – Abstract test architecture (2 ETBs) 244
Figure F.5 – Unit under test abstract architecture 245
Figure F.6 – Conformance test control telegram 248
Figure F.7 – Conformance test control telegram data 248
Figure F.8 – Conformance test status telegram 249
Figure F.9 – Conformance test status telegram data 250
Figure F.10 – (Un-)confirmation request 250
Figure F.11 – Conformance test confirmation/correction request data 251
Figure F.12 – Conformance test confirmation/correction reply data 252
Figure F.13 – Conformance test operational train directory request 253
Figure F.14 – Conformance test operational train directory request data 253
Figure F.15 – Conformance test operational train directory reply data 254
Figure F.16 – Echo test 255
Figure F.17 – Reverse-Echo test 256
Figure F.18 – Conformance test message data telegram data 257

Table 1 – Data type keywords and notations 30
Table 2 – ETB control service 39
Table 3 – Train directory computation – triggers 48
Table 4 – Train directory computation – guards 48
Table 5 – Train directory computation – actions 48

Table 6 – TCN URI basic syntax 63
Table 7 – General schema syntax 63
Table 8 – Device label syntax 65
Table 9 – Device label definition 65
Table 10 – vehicle label syntax 66
Table 11 – Veh (vehicle) label definition 66
Table 12 – Consist label syntax 67
Table 13 – Consist label definition 67
Table 14 – Closed train label syntax 68
Table 15 – Closed train label definition 68
Table 16 – Train label syntax 69
Table 17 – Train label definition 69
Table 18 – General decomposition of IP MC groups addresses 70
Table 19 – Decomposition of all-train groups 70
Table 20 – Decomposition of ETB-related groups 71
Table 21 – Decomposition of consist-limited groups 71
Table 22 – Well-known TCN-URI 72
Table 23 – TCN-URI resolving – Example 1 74
Table 24 – TCN-URI resolving – Example 2 75
Table 25 – TCN-URI resolving – Example 3 75
Table 26 – TCN-URI resolving – Example 4 76
Table 27 – Data class priorities 78
Table 28 – ETBCTRL processing – triggers 85
Table 29 – ETBCTRL processing – guards 85
Table 30 – ETBCTRL processing – actions 85
Table 31 – Leading function primitives – F_leadingStatusRequest 87
Table 32 – Leading function primitives – F_leadingSetRequest 87
Table 33 – Leading function primitives – F_leadingResetRequest 87
Table 34 – Leading function control flags 88
Table 35 – Leading function – triggers 91
Table 36 – Leading function – guards 91
Table 37 – Leading function – actions 91
Table 38 – Confirmation function primitives – F_confirmStatusRequest 93
Table 39 – Confirmation function primitives – F_confirmRequest 93
Table 40 – Confirmation function primitives – F_unconfirmRequest 93
Table 41 – Confirmation function control flags 94
Table 42 – Confirmation/correction state diagram – Trigger 98
Table 43 – Confirmation/correction state diagram – Guard 98
Table 44 – Confirmation/correction state diagram – Action 99
Table 45 – Confirmation/Correction rules 100
Table 46 – Operation Train Directory computation state diagram – Trigger 105
Table 47 – Operation Train Directory computation state diagram – Guards 105
Table 48 – Operation Train Directory computation state diagram – Action 105

Table 49 – Example of operational train directory 106
Table 50 – ETBN operating conditions 107
Table 51 – Sleep mode function primitives – F_sleepStatus 109
Table 52 – Sleep mode function primitives – F_sleepRequest 109
Table 53 – Sleep mode function primitives – F_sleepCancel 109
Table 54 – Sleep mode function primitives – F_nodeAwake 110
Table 55 – Sleep control function control flags 110
Table 56 – Sleep control state diagram – trigger 112
Table 57 – Sleep control state diagram – guards 112
Table 58 – Sleep control state diagram – action 113
Table A.1 – UDP/TCP port assignments 115
Table A.2 – Reserved ComIds 119
Table A.3 – PD-PDU parameters 127
Table A.4 – TRDP service primitives 128
Table A.5 – Topography counter check 135
Table A.6 – PD publisher state diagram – guards 136
Table A.7 – PD publisher state diagram – triggers 137
Table A.8 – PD publisher state diagram – actions 137
Table A.9 – PD publisher state diagram – states 137
Table A.10 – PD publisher state diagram – guards 138
Table A.11 – PD requester state diagram – triggers 138
Table A.12 – PD requester state diagram – actions 138
Table A.13 – PD requester state diagram – states 138
Table A.14 – PD subscriber state diagram – triggers 139
Table A.15 – PD subscriber state diagram – guards 139
Table A.16 – PD subscriber state diagram – actions 140
Table A.17 – PD subscriber state diagram – states 140
Table A.18 – MD-PDU parameters 143
Table A.19 – TRDP service primitives – Caller 145
Table A.20 – TRDP service primitives – Replier 147
Table A.21 – Topography counter check 150
Table A.22 – MD caller state diagram – triggers 153
Table A.23 – MD caller state diagram – guards 153
Table A.24 – MD caller state diagram – actions 154
Table A.25 – MD caller state diagram – states 154
Table A.26 – MD replier state diagram – triggers 157
Table A.27 – MD replier state diagram – guards 157
Table A.28 – MD replier state diagram – actions 157
Table A.29 – MD replier state diagram – states 158
Table A.30 – MD receiver state diagram – triggers 159
Table A.31 – MD receiver state diagram – guards 159
Table A.32 – MD receiver state diagram – actions 160
Table A.33 – MD receiver state diagram – states 160

Table B.1 – Deployed measures to communication errors 164
Table B.2 – SDSINK state diagram – triggers 175
Table B.3 – SDSINK state diagram – guards 175
Table B.4 – SDSINK state diagram – operations 175
Table B.5 – SDTV2 statistic counters 182
Table C.1 – Attributes for device tag 187
Table C.2 – Attributes for device-configuration tag 187
Table C.3 – Attributes for bus-interface tag 189
Table C.4 – Attributes for trdp-process tag 189
Table C.5 – Default values for thread/task 190
Table C.6 – Attributes for pd-com-parameter tag 190
Table C.7 – Default values for pd-com-parameter 191
Table C.8 – Attributes for md-com-parameter tag 192
Table C.9 – Default values for md-com-parameter 193
Table C.10 – Attributes for telegram tag 194
Table C.11 – Attributes for md-parameter tag 195
Table C.12 – Attributes for pd-parameter tag 196
Table C.13 – Attributes for source tag 197
Table C.14 – Attributes for destination tag 198
Table C.15 – Attributes for sdt-parameter tag 198
Table C.16 – Default values for sdt-parameter tag 199
Table C.17 – Attributes for mapped-device tag 200
Table C.18 – Attributes for mapped-bus-interface tag 201
Table C.19 – Attributes for mapped-telegram tag 201
Table C.20 – Attributes for mapped-pd-parameter tag 201
Table C.21 – Attributes for mapped-source tag 201
Table C.22 – Attributes for mapped-destination tag 202
Table C.23 – Attributes for mapped-SDTv2-parameter tag 202
Table C.24 – Attributes for com-parameter tag 203
Table C.25 – Default communication parameters 203
Table C.26 – Basic data types 204
Table C.27 – Attributes for data-set tag 205
Table C.28 – Attributes for element tag 206
Table C.29 – Use of element array size 207
Table F.1 – Conformance testing summary 258

INTERNATIONAL ELECTROTECHNICAL COMMISSION

_____

ELECTRONIC RAILWAY EQUIPMENT – TRAIN COMMUNICATION NETWORK (TCN) –

Part 2-3: TCN communication profile

FOREWORD

1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
6) All users should ensure that they have the latest edition of this publication.
7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61375-2-3 has been prepared by IEC technical committee 9: Electrical equipment and systems for railways.

The text of this standard is based on the following documents:

FDIS	Report on voting
9/2029/FDIS	9/2048/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61375 series, published under the general title *Electronic railway equipment – Train communication network (TCN)*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

The IEC 61375 standard series specifies a Train Communication Network for usage in railway vehicles (trains) mainly intended for the exchange of TCMS related information, but not restricted to it. The specification starts from the physical layer up to the application layer and it involves different communication technologies.

This part of IEC 61375 (IEC 61375-2-3) defines the communication profile of the Train Communication Network so as to achieve interoperability between Consists connected by Ethernet Train Backbones as defined in IEC 61375-2-5.

The reasons for prompting the preparation of this part of IEC 61375 are:

- definition of the requirements necessary for communication interoperability on Ethernet Train Backbone level
- full documentation of the requirements of all users, aligning them and setting them out in standard form
- providing guidelines for the technical solution adopted for the train backbone interoperable communication
- defining a conformance test guideline (Annex F) which gives guidance for checking the conformity of consists to the communication profile

Concrete train applications for certain functionalities are not dealt with in this part of IEC 61375. They are contained in IEC 61375-2-4.

ELECTRONIC RAILWAY EQUIPMENT – TRAIN COMMUNICATION NETWORK (TCN) –

Part 2-3: TCN communication profile

1 Scope

This part of IEC 61375 specifies rules for the data exchange between consists in trains. The aggregation of these rules defines the TCN communication profile.

The objective of the communication profile is to ensure interoperability between consists of the said trains with respect to the exchange of information. For this it defines all those items which are necessary for communication interoperability:

- an architecture with defined train directions related to different train views
- a common functional addressing concept
- common communication protocol for data exchange between functions
- a set of services for train communication control.

As a restriction, this communication profile is adhered to the Ethernet Train Backbone (ETB) technology as defined in IEC 61375-2-5. Towards the consist networks, a more abstract interface is defined which does not restrict the appliance of any consist network technology as for instance MVB (IEC 61375-3-1), CANOpen (IEC 61375-3-3) or ECN (IEC 61375-3-4).

It is not within the scope of the communication profile to define application data content and its meaning (e.g. syntax and semantics). This is within the responsibility of the application profiles. Namely two application profiles are explicitly supported as shown in Figure 1: the TCMS application profile as defined in IEC 61375-2-4, and the onboard multimedia and telematic services (OMTS) related profiles as defined in the IEC 62580 series.

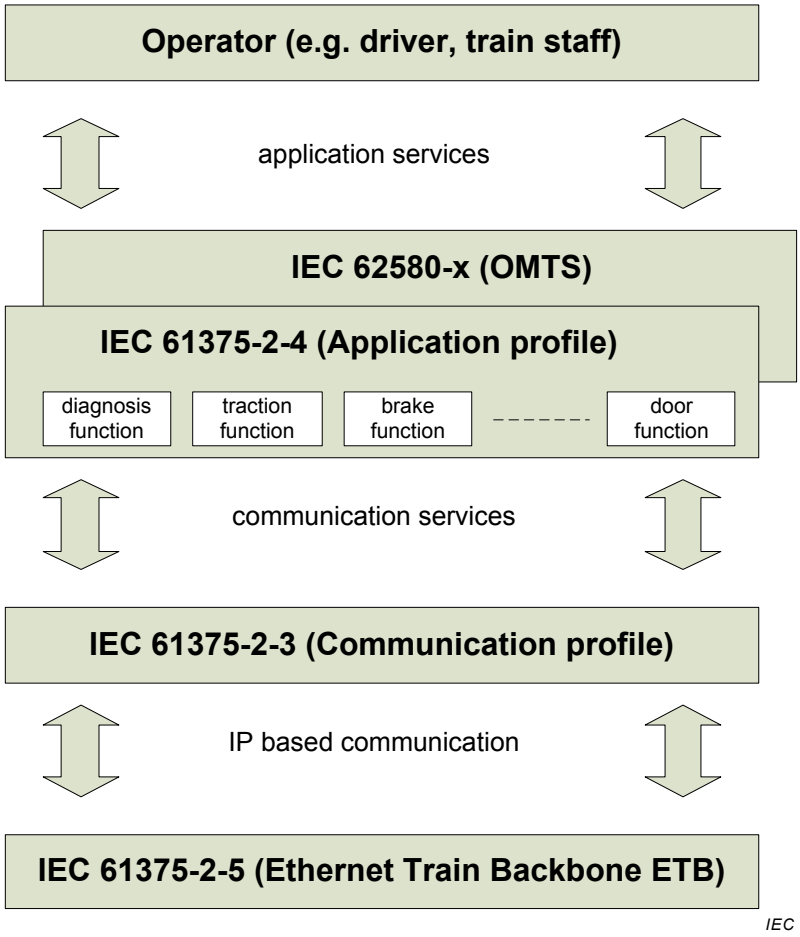


Figure 1 – IEC 61375-2-3 as connecting element between train backbone and application

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61375-1, *Electronic railway equipment – Train communication network (TCN) – Part 1: General architecture*

IEC 61375-2-1, *Electronic railway equipment – Train communication network (TCN) – Part 2-1: Wire Train Bus (WTB)*

IEC 61375-2-4, *Electronic railway equipment – Train communication network (TCN) – Part 2-4: Application Profile* (to be published)

IEC 61375-2-5, *Electronic railway equipment – Train communication network (TCN) – Part 2-5: Ethernet train backbone*

IEC 62280*, Railway applications – Communication, signalling and processing systems – Safety related communication in transmission systems*

ISO/IEC 9646-6:1994, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 6: Protocol profile test specification*

ISO/IEC 9646-7:1995, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 7: Implementation Conformance Statements*

ISO/IEC 17011:2004, *Conformity assessment – General requirements for accreditation bodies accrediting conformity assessment bodies*

ISO/IEC 17025:2005, *General requirements for the competence of testing and calibration laboratories*