International Standard

ISO 11898-1

Road vehicles — Controller area network (CAN) —

Part 1: Data link layer and physical coding sublayer

Véhicules routiers — Gestionnaire de réseau de communication (CAN) —

Partie 1: Couche liaison de données et sous-couche de codage physique

Third edition
2024-05

Reference number
ISO 11898-1:2024(en)

© ISO 2024



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword ..... **v**
Introduction ..... **vi**
1 Scope **1**
2 Normative references **1**
3 Terms and definitions **1**
4 Symbols and abbreviated terms **6**
5 Basic concepts of CAN **8**
5.1 CAN properties 8
5.2 Frame transmissions 9
5.3 Bus access method 11
5.4 Information routing 11
5.5 Network flexibility 11
5.6 Remote data request 11
5.7 Error detection 11
5.8 Error signalling and recovery time 11
5.9 Fault confinement 12
5.10 Error-active 12
5.11 Error-passive 12
5.12 Bus-off 12
5.13 ACK 12
5.14 Repetition of transmission attempts 12
5.15 Network-wide data consistency 12
5.16 Switchable operating modes of the PMA 13
5.17 Bus states and MAC sub-layer phases 13
6 CAN DLL specification **14**
6.1 General 14
6.2 Time stamping 14
6.3 DLL protocol 14
6.4 LLC sub-layer 15
6.4.1 Overview 15
6.4.2 Notifications 16
6.4.3 Structure of LLC frames 16
6.4.4 Limited LLC frames 17
6.4.5 Services of LLC sub-layer 17
6.5 Functions of the LLC sub-layer 21
6.5.1 General 21
6.5.2 Flow control on re-arbitration 21
6.5.3 Flow control on retransmission 21
6.5.4 Frame acceptance filtering 22
6.5.5 Overload notification 22
6.5.6 Recovery management 22
6.5.7 Time stamping 22
6.6 MAC sub-layer 23
6.6.1 Functions and rules 23
6.6.2 Services of the MAC sub-layer 23
6.6.3 Time reference points 23
6.6.4 Functional model of MAC sub-layer architecture 23
6.6.5 Specification of EF 27
6.6.6 Specification of OF 28
6.6.7 Inter-frame space specification 28
6.6.8 SOF 30
6.6.9 Elements of the MAC frame 30
6.6.10 MAC frame in CBFF and CEFF 31

© ISO 2024 – All rights reserved

6.6.11 MAC frame in FBFF and FEFF 33
6.6.12 MAC frame in XLFF 37
6.6.13 MAC frame coding 42
6.6.14 Data frame acknowledgement 43
6.6.15 Frame validation 43
6.6.16 Order of bit transmission 43
6.6.17 Medium access method 43
6.6.18 MAC data consistency 45
6.6.19 Restricted operation 45
6.6.20 Bus monitoring 45
6.6.21 Error handling and overload handling 45

7 PL specifications 49
7.1 General and functional modelling 49
7.2 Services of the PCS interface 50
7.2.1 Requirements 50
7.2.2 PCS_Data.Request 50
7.2.3 PCS_Data.Indicate 50
7.2.4 PCS_Mode.Request 50
7.2.5 PCS_Status.Transmitter 51
7.2.6 PCS_Status.Receiver 51
7.3 PCS 51
7.3.1 Bit encoding/decoding 51
7.3.2 Bit time 51
7.3.3 Configuration of the bit time parameters 55
7.3.4 Transmitter delay compensation 56
7.3.5 Synchronization 58
7.3.6 Tolerance range of the oscillator frequencies 60
7.4 Attachment unit interface 61
7.4.1 General 61
7.4.2 PCS to PMA symbols 61
7.4.3 PMA to PCS symbol 62
7.5 PWM encoding 62
7.5.1 General function and definitions 62
7.5.2 PCS without PWM encoding 63
7.5.3 PCS sub-layer with PWM encoding 63

8 Description of supervisor FCE 66
8.1 Fault confinement 66
8.1.1 Objectives 66
8.1.2 Strategies 66
8.1.3 Fault confinement interface specification 66
8.1.4 Rules of fault confinement 69
8.1.5 Node start-up 71
8.2 Bus failure management 71

Annex A (normative) **CAN FD light — Data link layer and physical coding sub-layer requirements of responder nodes 72**

Annex B (informative) **Configuration interface 80**

Annex C (informative) **Additional information 81**

Bibliography 82

© ISO 2024 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This third edition cancels and replaces the second edition (ISO 11898-1:2015), which has been technically revised.

The main changes are as follows:

— CAN XL requirements added;

— CAN FD light protocol (Annex A) requirements added;

— editorial corrections.

A list of all parts in the ISO 11898 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user’s national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.


© ISO 2024 – All rights reserved

Introduction

The ISO 11898 series provides requirement specifications for the controller area network (CAN) data link layer and physical layer. It is intended for chip implementers, e.g. this document can be used for CAN protocol controllers and ISO 11898-2 for CAN transceivers. The CAN data link layer models the open systems interconnection (OSI) data link layer; it is internally subdivided into logic link control (LLC) and medium access control (MAC). This document also specifies the physical coding sub-layer (PCS) by means of the attachment unit interface (AUI). The PCS also provides the pulse-with modulation (PWM) encoding to be linked to a CAN SIC XL transceiver, which provides the PWM decoding.

The OSI layers above the data link layer (e.g. the network layer) are not specified in the ISO 11898 series of specifications.

Figure 1 shows the relationship between the OSI layers and the CAN sub-layers.

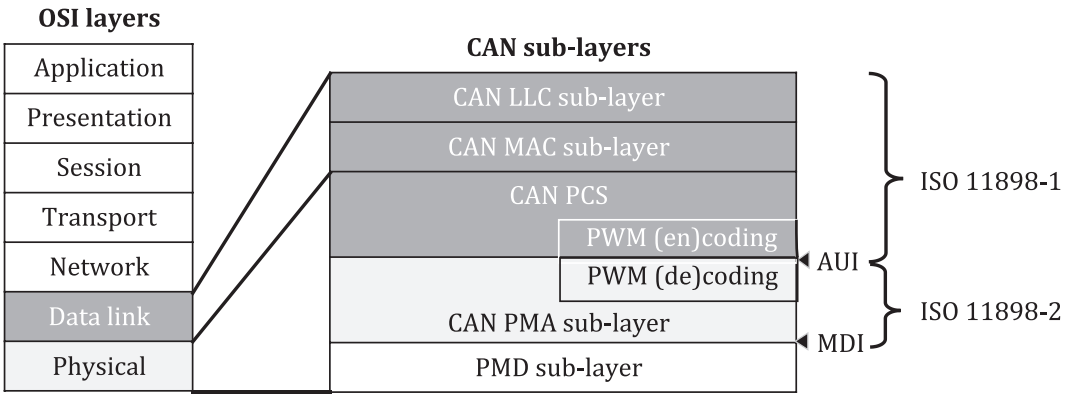

Key

AUI attachment unit interface
LLC logic link control
MAC medium access control
MDI medium dependent interface
PCS physical coding sub-layer
PMA physical medium attachment
PMD physical medium dependent
PWM pulse-width modulation

Figure 1 — CAN data link and physical sub-layers in relation to the OSI model

© ISO 2024 – All rights reserved

Road vehicles — Controller area network (CAN) —

Part 1:
Data link layer and physical coding sublayer

1 Scope

This document specifies the controller area network (CAN) data link layer (DLL) and the physical coding sub-layer (PCS). The CAN DLL features data fields of up to 2048 byte when the CAN extended data field length (XL) frame format is used.

This document divides the CAN DLL into the logical link control (LLC) and the medium access control (MAC) sub-layers. The DLL's service data unit (SDU), which interfaces the LLC and the MAC, is implemented by means of the LLC frame. The LLC frame also features the service data unit type (SDT) and the virtual CAN channel identifier (VCID), which provide higher-layer protocol configuration and identification information. How the higher-layer functions are handled is not specified in this document. There are five implementation options:

1 support of the CAN classic frame format only, not tolerating the CAN flexible data rate (FD) frame format;

2 support of the CAN classic frame format and tolerating the CAN FD frame format;

3 support of the CAN classic frame format and the CAN FD frame format;

4 support of the CAN classic frame format, the CAN FD frame format and the CAN XL frame format;

5 support of the CAN FD frame format for CAN FD light responders (Annex A).

NOTE Nodes of the first option can communicate with nodes of the third and fourth option when only the CAN classic frame format is used. Nodes of the first option cannot communicate with nodes of the fifth option: any attempt at communication generates error frames. Therefore, new designs implementing the fourth option can communicate with all other nodes.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at https://www.iso.org/obp

— IEC Electropedia: available at https://www.electropedia.org/

3.1
arbitration mode
operating mode of the physical coding sub-layer (PCS) in which it is allowed that dominant bits can overwrite recessive bits

© ISO 2024 – All rights reserved